



## रेलटेल कॉर्पोरेशन ऑफ इंडिया लिमिटेड

(भारत सरकार का उपक्रम, रेल मंत्रालय)

सूचीबद्ध व्यावसायिक सहयोगियों या **OEM** या **OEM** द्वारा अधिकृत भागीदार/वितरक में से  
कार्यान्वयन भागीदार के चयन के लिए रुचि की अभिव्यक्ति।

“सिम्हास्थ कुंभ मेला 2028 के लिए एकीकृत कमान एवं नियंत्रण केंद्र (आईसीसीसी) की स्थापना और संचालन एवं  
रखरखाव हेतु सिस्टम इंटीग्रेटर (एसआई) कार्य के लिए व्यावसायिक साझेदार का चयन।”

**EoI**

**For**

**“Selection of System Integrator (SI) for Establishment and O&M of Integrated  
Command & Control Centre (ICCC) for Simhastha Kumbh Mela 2028.”**

ईओआई नंबर: रेलटेल/डब्ल्यूआर/बीपीएल/यूएससीएल/2026-27/09 दिनांक: 16 जून 2026

प्लॉट नंबर 17, पहली मंजिल, रघुनाथ नगर, शाहपुरा पुलिस स्टेशन के पास,  
भोपाल एमपी-462039

## ईओआई नोटिस

रेलटेल कॉर्पोरेशन ऑफ इंडिया लिमिटेड, प्लॉट नंबर 17, प्रथम तल,  
रघुनाथ नगर, शाहपुरा पुलिस स्टेशन के पास, भोपाल एमपी – 462039

ईओआई नंबर: रेलटेल/डब्ल्यूआर/बीपीएल/यूएससीएल/2026-27/09 दिनांक: 16 जून 2026

रेलटेल कॉर्पोरेशन ऑफ इंडिया लिमिटेड, (जिसे आगे “रेलटेल” कहा जाएगा) रेलटेल के सूचीबद्ध भागीदारों या ओईएम या ओईएम के अधिकृत भागीदार/वितरक से “सिम्हास्थ कुंभ मेला 2028 के लिए एकीकृत कमान एवं नियंत्रण केंद्र (आईसीसीसी) की स्थापना और संचालन एवं रखरखाव हेतु सिस्टम इंटीग्रेटर (एसआई) कार्य के लिए व्यावसायिक साझेदार का चयन” के प्रस्ताव के लिए हेतु ईओआई आमंत्रित करता है।

विवरण निम्नानुसार है:

|   |                                                                                      |                                              |
|---|--------------------------------------------------------------------------------------|----------------------------------------------|
| 1 | बोलीदाताओं द्वारा ईओआई के विरुद्ध बोली प्रतिक्रिया पैकेट प्रस्तुत करने की अंतिम तिथि | 19 जून 2026 10:00 AM                         |
| 2 | ईओआई के बोली प्रतिक्रिया पैकेट का उद्घाटन                                            | 19 जून 2026 10:30 AM                         |
| 3 | कार्य के दायरे के लिए प्रस्तुत की जाने वाली प्रतियों की संख्या                       | एक                                           |
| 4 | ईएमडी राशि                                                                           | Rs. 5000000/- (पचास लाख रुपये)               |
| 5 | टेंडर फीस                                                                            | Rs. 51180/- (इक्यावन हजार एक सौ अस्सी रुपये) |

ईएमडी रेलटेल कॉर्पोरेशन ऑफ इंडिया लिमिटेड के पक्ष में होनी चाहिए और मुंबई में ऑनलाइन बैंक ट्रांसफर के माध्यम से देय होगी। पार्टनर को प्रस्ताव के साथ ऑनलाइन भुगतान हस्तांतरण विवरण जैसे यूटीआर नंबर, तारीख और बैंक को साझा करना होगा।

रेलटेल बैंक विवरण:

यूनियन बैंक ऑफ इंडिया,  
खाता संख्या 317801010036605,  
IFSC कोड - UBIN0531782,  
शाखा का नाम - महालक्ष्मी शाखा

योग्य व्यावसायिक सहयोगी/ओईएम/ओईएम के अधिकृत साझेदार या वितरक को ईओआई दस्तावेज के लिए इस आमंत्रण से संबंधित सभी संचार निम्नलिखित नामित अधिकारियों से करे:

स्तर:1 संपर्क: श्री आनंद कुमार  
पद: संयुक्त महाप्रबंधक/विपणन  
ईमेल: [anandnkn@railtelindia.com](mailto:anandnkn@railtelindia.com)  
संपर्क: +91-9004444107

स्तर:2 संपर्क: श्री पवन कुमार भार्गव  
पद: ईडी/टीएम/भोपाल  
ईमेल: [pavan@railtelindia.com](mailto:pavan@railtelindia.com)

Note:

1. Empaneled partners/OEMs/authorized partner or distributor of OEMs are required to submit soft copy (password protected PDF) of bid response packet (separate for Technical bid and Financial Bid) through an e-mail at [bpltooffice@railtelindia.com](mailto:bpltooffice@railtelindia.com) duly signed by Authorized Signatories with Company seal and stamp. **The size of both the files should not exceed 20 Mb.**
2. **The OEMs need not be prior empaneled Business Associates, given their proven technical prowess. However, The EOI response is invited from eligible Empaneled Partners of RailTel only in case of participation by Business Associates.**
3. The password will be sought at the time of opening of the bid response packet.
4. All the documents must be submitted with proper indexing and page no.
5. This is an **exclusive arrangement with empaneled business associate/OEMs/ authorized partner or distributor of OEM of RailTel for fulfilling the end customer requirements.** Selected partner's authorized signatory has to give an undertaking they will not submit directly or indirectly their bids and techno-commercial solution/association with any other organization once selected through this EOI (before and after submission of bid to prospective organization by RailTel). This undertaking has to be given with this EOI Response.
6. **Transfer and Sub-letting.** The Business Associate/OEMs/authorized partner or distributor of OEM has no right to give, bargain, sell, assign or sublet or otherwise dispose of the Contract or any part thereof, as well as to give or to let a third party take benefit or advantage of the present Contract or any part thereof.

## 1. Introduction about RailTel

**RailTel Corporation of India Limited (RailTel)**, an ISO-9001:2000 organization is a “**Navratna**” company under Ministry of Railways, Government of India. The Corporation was formed in Sept 2000 with the objectives to create nationwide Broadband Telecom and Multimedia Network in all parts of the country, to modernize Train Control Operation and Safety System of Indian Railways and to contribute to realization of goals and objective of national telecom policy 1999. RailTel is a wholly owned subsidiary of Indian Railways.

RailTel has approximately 70000 kms of OFC along the protected Railway tracks. The transport network is built on high capacity DWDM and an IP/ MPLS network over it to support mission critical communication requirements of Indian Railways and other customers. RailTel has Tier-III Data Center in Gurgaon and Secunderabad hosting / collocating critical applications. RailTel is also providing Telepresence as a Service (TPaaS), where a High- Definition Video Conference facility bundled with required BW is provided as a Service.

For ensuring efficient administration across India, country has been divided into four regions namely, Eastern, Northern, Southern & Western each headed by Executive Director and Headquartered at Kolkata, New Delhi, Secunderabad & Mumbai respectively. These regions are further divided into territories for efficient working. RailTel has territorial offices at Guwahati, & Bhubaneswar in East, Chandigarh, Jaipur, Lucknow in North, Chennai & Bangalore in South, Bhopal, and Pune & Ahmedabad in West. Various other territorial offices across the country are proposed to be created shortly.

RailTel’s business service lines can be categorized into three heads namely B2G/B2B (Business to Government and Business to Business) and B2C (Business to customers):

Licenses & Service portfolio:

Presently, RailTel holds Infrastructure Provider -1, National Long-Distance Operator, International Long-Distance Operator and Internet Service Provider (Class-A) licenses under which the following services are being offered to various customers:



**a) Carrier Services**

- National Long Distance: Carriage of Inter & Intra -circle Voice Traffic across India using state of the art NGN based network through its Interconnection with all leading Telecom Operators
- Lease Line Services: Available for granularities from E1 to multiple of Gigabit bandwidth & above
- Dark Fiber/Lambda: Leasing to MSOs/Telco's along secured Right of Way of Railway tracks
- Co-location Services: Leasing of Space and 1000+ Towers for collocation of MSC/BSC/BTS of Telco's

**b) Enterprise Services**

- Managed Lease Line Services: Available for granularities from E1, DS-3, STM-1 & above
- MPLS VPN: Layer-2 & Layer-3 VPN available for granularities from 2 Mbps & above
- Dedicated Internet Bandwidth: Experience the "Always ON" internet connectivity at your fingertips in granularities 2 Mbps to several Gbps

**c) DATA CENTER Infrastructure as a service (IaaS), Hosting as Services, Security operation Centre as a Service (SOCaaS):** RailTel has MeitY empaneled two Tier-III data centres in Gurgaon & Secunderabad. Presently RailTel is hosting critical applications of Indian Railways, Central & State government/ PSUs applications. RailTel will facilitate Government's applications / Hosting services including smooth transition to secured state owned RailTel's Data Centers and Disaster Recovery Centres. RailTel also offers SOC as a Service 'SOCaaS'. In addition, RailTel offers VPN client services so that employees can seamlessly access government's intranet, applications securely from anywhere without compromising security.

- National Long Distance: Carriage of Inter & Intra -circle Voice Traffic across India using state of the art NGN based network through its Interconnection with all leading Telecom Operators
- Lease Line Services: Available for granularities from E1 to multiple of Gigabit bandwidth & above
- Dark Fiber/Lambda: Leasing to MSOs/Telco's along secured Right of Way of Railway tracks
- Co-location Services: Leasing of Space and 1000+ Towers for collocation of MSC/BSC/BTS of Telco's

**d) High-Definition Video Conference:** RailTel has unique service model of providing high-definition video conference bundled with Video Conference equipment, bandwidth and FMS services to provide end to end seamless services on OPEX model connecting HQ with other critical offices. RailTel also offers application-based video conference solution for employees to be productive specially during this pandemic situation.

**e) Retail Services – Rail-Wire**

Rail-Wire: Triple Play Broadband Services for the Masses. RailTel has unique model of delivering broadband services, wherein local entrepreneurs are engaged in delivering &

maintaining broadband services and up-to 66% of the total revenues earned are shared to these local entrepreneurs in the state, generating jobs and revitalizing local economies. On date RailTel is serving approx. 4,00,000 subscribers on PAN Indian basis. RailTel can provide broadband service across– Government PSU or any organization’s officers colonies and residences.

## **2. Scope of Work**

### **2.1 Overview**

Ujjain Smart City Limited (USCL) intends to appoint a System Integrator (SI) for the design, engineering, supply, installation, integration, testing, commissioning, operations, and maintenance of an Integrated Command & Control Centre (ICCC) ecosystem for Simhashta 2028, Ujjain.

The project shall include the establishment of an integrated surveillance, crowd management, communication, analytics, Digital Twin, cybersecurity, and decision-support ecosystem through a hybrid deployment model comprising:

- Permanent infrastructure (CAPEX),
- Temporary/rental infrastructure for event-period surge deployment,
- Operations & Maintenance (O&M).

The selected SI shall be responsible for complete end-to-end implementation and operationalization of all components under the project scope.

As per Section-2 Scope of work (Volume02)

## **3. Response to EOI guidelines**

### **3.1 Language of Proposals**

The proposal and all correspondence and documents shall be written in English in password protected PDF file through an email (size of email should not exceed 20Mb) to [bpltooffice@railtelindia.com](mailto:bpltooffice@railtelindia.com).

### **3.2 RailTel’s Right to Accept/Reject responses**

RailTel reserves the right to accept or reject any response and annul the bidding process or even reject all responses at any time prior to selecting the partner, without thereby incurring any liability to the affected bidder or Business Associate/OEM/authorized partner or distributor of OEM or without any obligation to inform the affected bidder or bidders about the grounds for RailTel’s action.

### **3.3 EOI response Document**

The bidder is expected to examine all instructions, forms, terms and conditions and technical specifications in the bidding documents. Submission of bids, not substantially responsive to the bidding document in every aspect will be at the bidder’s risk and may result in rejection of its bid without any further reference to the bidder.

All pages of the documents shall be signed by the bidder including the closing page in token of his having studied the EOI document and should be submitted along with the bid.

### 3.4 Period of Validity of bids and Bid Currency

Bids shall remain valid for 180 days from the date of submission.

### 3.5 Bidding Process

The bidding process as defined in para 9.

### 3.6 Bid Earnest Money (EMD)

- 3.6.1 The Business Associate shall furnish a sum as given in EOI Notice via online transfer from any scheduled bank in India in favor of “RailTel Corporation of India Limited” along with the offer.
- 3.6.2 Offers not accompanied with valid EOI Earnest Money Deposit shall be summarily rejected.
- 3.6.3 In case of Business Associate’s offer is selected, the selected Business Associate shall have to furnish security deposit of 03% of the work order value within 15 days from the date of issue of Work Order. The security deposit shall be in the form of FDR/Cash transfer through any nationalized bank in favour of Registrar General or unconditional Bank Guarantee of any Nationalized Bank of equal amount. The security deposit money will be refundable only after one year of successful installation of Local Area Network. The security deposit will be forfeited if during the period of installation services of the bidder are found to be unsatisfactory in any respect.
- 3.6.4 Tender Fees, EMD and PBG (if PBG amount is less the 5 Lac, wherever applicable) will be deposited in the form of Online Bank Transfer.
- 3.6.5 EMD will be refunded after submission of Performance Bank Guarantee.
- 3.6.5.1 The EOI EMD may be forfeited and or penal action shall be initiated if a Business Associate withdraws his offer or modifies the terms and conditions of the offer during validity period.

### 3.7 Last date & time for Submission of EOI response

EOI response must be submitted to RailTel at the email address specified in the preamble not later than the specified date and time mentioned in the preamble.

### 3.8 Modification and/or Withdrawal of EOI response

EOI response once submitted will treated, as final and no modification will be permitted except with the consent of the RailTel. No Business Associate shall be allowed to withdraw the response after the last date and time for submission.

The successful Business Associate will not be allowed to withdraw or back out from the response commitments. In case of withdrawal or back out by the successful business associate, the Earnest Money Deposit shall be forfeited, and all interests/claims of such Business Associate shall be deemed as foreclosed.

### 3.9 Clarification of EOI Response

To assist in the examination, evaluation and comparison of bids the purchaser may, at its discretion, ask the Business Associate for clarification. The response should be in writing and no change in the price or substance of the EOI response shall be sought, offered or permitted.

### 3.10 Period of Association/Validity of Agreement

RailTel will enter into agreement with selected bidder with detailed Terms and conditions.

## 4. Pre-Qualification Criteria for Bidding Business Partner of RailTel

| S No. | Particulars                                                                                                                                                                                                        | Criteria for Tender Package                                                                                                                                                                                                                               |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A)    | <b>Financial Conditions</b>                                                                                                                                                                                        |                                                                                                                                                                                                                                                           |
| 1     | LoE issued by RailTel should not be expired on date of submission of proposal and should have at least 3 years of operations in India as on bid submission date.                                                   | 1. Valid Empanelment letter issued by RailTel<br>2. Certificate of Incorporation<br>3. GST Registration<br>4. PAN Card                                                                                                                                    |
| 2     | Average Annual turnover of the bidder during last 3 financial years, ending 31st March 2025 i.e. 2022-23, 2023-24, 2024-25 should be Rs. 150 Crore.                                                                | Turnover Certificate issued by the Chartered Accountant. Certificate should contain UDIN no. issued by ICAI and extracts from the audited balance sheet and profit & loss for last three financial year. Positive Net Worth Certificate issued by the CA. |
| 3     | The Bidder should have Experience in Supply, Installation, commissioning & Maintenance of IT/ITeS. (Single PO of value– Rs. 75 Crore. (Command Control work/Data Centre/CCTV Security Surveillance/CCTV+WiFi Work) | PO copy and respective service completion certificate.                                                                                                                                                                                                    |
| 4     | The participating bidder should be a currently active empanelled business associate of RailTel or OEM(s) or its authorized partner/distributor.                                                                    | Documentary proof of empanelment along with proof of empanelment Fee to be submitted.<br>and<br>Documentary proof of OEM (Self undertaking and Manufacturer's Authorization Certificate)                                                                  |
| 5     | Bidder should not have been blacklisted by any State or Central Government as on the bid submission date.                                                                                                          | Undertaking on company's letter head                                                                                                                                                                                                                      |



| S No. | Particulars                                 | Criteria for Tender Package                                                                                                                                                                                                                    |
|-------|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                             | (Mandatory Compliance & Document Submission)                                                                                                                                                                                                   |
| B)    | <b>Annexures</b>                            |                                                                                                                                                                                                                                                |
|       |                                             |                                                                                                                                                                                                                                                |
| 1     | <b>Annexure 1</b>                           | <b>Covering Letter:</b> Self-certification duly signed by authorized signatory on company letter head.                                                                                                                                         |
| 2     | <b>Annexure 2</b>                           | The Bidder should agree to abide by all the technical, commercial & financial conditions of the end customer PO for which EOI is submitted.                                                                                                    |
| 3     | <b>Annexure 3</b>                           | An undertaking signed by the Authorized Signatory of the company to be provided on letter head. The Bidder should not have been blacklisted / debarred by any Governmental / Non-Governmental Organization in India as on bid submission date. |
| 4     | <b>Annexure-4</b>                           | Format for Affidavit to be uploaded by BA along with the tender documents.                                                                                                                                                                     |
| 5     | <b>Annexure-5</b>                           | Non-disclosure agreement with RailTel. (On 100 Rs. Stamp dually Notarized)                                                                                                                                                                     |
| 6     | <b>Annexure-6</b>                           | BoQ format attached.<br>Duly filled & Password protected BoQ will be mailed separately by bidder.                                                                                                                                              |
| 7     | <b>Annexure-7</b>                           | Power of Attorney <b>or</b> Board Resolution in favor of one of its employees who will sign the Bid Documents.                                                                                                                                 |
| 8     | <b>Annexure-8</b>                           | Declaration regarding all technical compliance along with MAF released by OEM, who has declared that their product is technically complied.                                                                                                    |
| 9     | <b>Additional Documents to be Submitted</b> | Technical & Commercial Proposal with overview of the project with strength of the Partner.                                                                                                                                                     |

## 5. Bidder's Profile

The bidder shall provide the information in the below table:

| S. No. | ITEM                                                                                                                                                                                  | Details |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| 1.     | Full name of bidder's firm                                                                                                                                                            |         |
| 2.     | Full address, telephone numbers, fax numbers, and email address of the primary office of the organization / main / head / corporate office                                            |         |
| 3.     | Name, designation and full address of the Chief Executive Officer of the bidder's organization as a whole, including contact numbers and email Address                                |         |
| 4.     | Full address, telephone and fax numbers, and email addresses of the office of the organization dealing with this EOI                                                                  |         |
| 5.     | Name, designation and full address of the person dealing with the EOI to whom all reference shall be made regarding the EOI enquiry. His/her telephone, mobile, Fax and email address |         |
| 6.     | Bank Details (Bank Branch Name, IFSC Code, Account number)                                                                                                                            |         |
| 7.     | GST Registration number                                                                                                                                                               |         |

## 6. Evaluation Criteria

- 6.1 The Business Associates are first evaluated on the basis of the Pre-Qualification Criteria as per clause 5 above.
- 6.2 The Business Associate who meets all the Pre-qualification criteria, their price bid will be evaluated. The Lowest (L1) price bidder will be selected and entered into agreement with for delivery of the work on back-to-back basis for the agreed scope of work.
- 6.3 RailTel reserves the right to further re-negotiate the prices with eligible L1 bidder. Selected bidder must ensure the best commercial offer to RailTel.
- 6.4 RailTel also reserves the right to accept or reject the response against this EOI, without assigning any reasons. The decision of RailTel is final and binding on the participants. The RailTel evaluation committee will determine whether the proposal/ information is complete in all respects and the decision of the evaluation committee shall be final. RailTel may at its discretion assign lead factor to the Business associate as per RailTel policy for shortlisting partner against this EOI. RailTel also reserves the right to negotiate the price with the selected bidder.

- 6.5 All General requirement mentioned in the Technical Specifications are required to be complied. The solution proposed should be robust and scalable.

## 7. Payment terms

- 7.1 RailTel shall make payment to selected Business Associate after receiving payment from Customer for the agreed scope of work. In case of any penalty or deduction made by customer for the portion of work to be done by BA, same shall be passed on to Business Associate.
- 7.2 All payments by RailTel to the Partner will be made after the receipt of payment by RailTel from end Customer organization.

## 8. SLA

The selected bidder will be required to adhere to the SLA matrix if/as defined by the end Customer. SLA breach penalty will be applicable proportionately on the selected bidder, as specified by the end Customer. The SLA scoring and penalty deduction mechanism for in-scope of work area shall be followed as specified by the customer. All associated clarifications, responses to queries, revisions, addendum and corrigendum, associated Prime Services Agreement (PSA)/ MSA/ SLA also included. Any deduction by Customer from RailTel payments on account of SLA breach which is attributable to Partner will be passed on to the Partner proportionately based on its scope of work.

## 9. Other Terms and Conditions

Any other terms and conditions in relation to SLA, Payments, PBG etc. will be as per the PO/agreement/Work Order of the end customer.

**Annexure 1: Format for COVERING LETTER**  
(To be on company letter head)

EoI Reference No: Date :

To,  
ED,  
RailTel Corporation of India Ltd.  
Plot No. 17, First Floor,  
Raghunath Nagar,  
Near Shahpura Thana,  
Bhopal, M.P. - 462039

Dear Sir,  
SUB: Participation in the EoI process

Having examined the Invitation for EoI document bearing the ref. no. \_\_\_\_\_ released by your esteemed organization, we, undersigned, hereby acknowledge the receipt of the same and offer to participate in conformity with the said Invitation for EoI document.

If our application is accepted, we undertake to abide by all the terms and conditions mentioned in the said Invitation for EoI document.

We hereby declare that all the information and supporting documents furnished as a part of our response to the said Invitation for EoI document, are true to the best of our knowledge. We understand that in case any discrepancy is found in the information submitted by us, our EoI is liable to be rejected.

We hereby Submit EMD amount of Rs. \_\_\_\_\_ issued vide \_\_\_\_\_ from Bank \_\_\_\_\_.

Authorized Signatory

Name

Designation

**Annexure 2: Format for Self-Certificate & Undertaking**  
(To be on company letter head)

EoI Reference No: Date:

To,

ED,

RailTel Corporation of India Ltd.  
Plot No. 17, First Floor,  
Raghunath Nagar,  
Near Shahpura Thana,  
Bhopal, M.P. - 462039

Dear Sir,

**Sub: Self Certificate for Tender, Technical & other compliances**

- 1) Having examined the Technical specifications mentioned in this EOI & end customer tender, we hereby confirm that we meet all specification.
- 2) We agree to abide by all the technical, commercial & financial conditions of the end customer RFP for which EOI is submitted (except pricing, termination & risk purchase rights of the RailTel). We understand and agree that RailTel shall release the payment to selected BA after the receipt of corresponding payment from end customer by RailTel. Further we understand that in case selected BA fails to execute assigned portion of work, then the same shall be executed by RailTel through third party or departmentally at the risk and cost of selected BA.
- 3) We agree to abide by all the technical, commercial & financial conditions of the end customer's RFP for the agreed scope of work for which this EOI is submitted.
- 4) We hereby agree to comply with all OEM technical & Financial documentation including MAF, Technical certificates/others as per end-to-end requirement mentioned in the end customer's RFP. We are hereby enclosing the arrangement of OEMs against each of the BOQ item quoted as mentioned end customer's RFP. We also undertake to submit MAF and other documents required in the end Customer organization tender in favour of RailTel against the proposed products.
- 5) We hereby undertake to work with RailTel as per end customer's RFP terms and conditions. We confirm to submit all the supporting documents constituting/ in compliance with the Criteria as

required in the end customer's RFP terms and conditions like technical certificates, OEM compliance documents.

- 6) We understand and agree that RailTel is intending to select a BA who is willing to accept all terms & conditions of end customer organization's RFP for the agreed scope of work. RailTel will strategies to retain scope of work where RailTel has competence.
- 7) We hereby agree to submit that in case of being selected by RailTel as BA for the proposed project (for which EOI is submitted), we will submit all the forms, appendix, relevant documents etc. to RailTel that is required and desired by end Customer well before the bid submission date by end customer and as and when required.
- 8) We hereby undertake to sign Pre-Bid Agreement and Non-Disclosure Agreement with RailTel on a non-judicial stamp paper of Rs. 100/- in the prescribed Format.

Authorized Signatory Name & Designation

### **Annexure 3: Undertaking for not Being Blacklisted/Debarred**

<On Company Letter Head>

To,  
ED,  
RailTel Corporation of India Ltd.  
Plot No. 17, First Floor,  
Raghunath Nagar,  
Near Shahpura Thana,  
Bhopal, M.P. - 462039

Subject: Undertaking for not Being Blacklisted/Debarred

We, Company Name , having its registered office at address hereby declares that that the Company has not been blacklisted/debarred by any Governmental / Non- Governmental organization in India for past 3 Years as on bid submission date.

Date and Place

Authorized Signatory's Signature:

Authorized Signatory's Name and Designation:

Bidder's Company Seal:

#### **Annexure 4: Format of Affidavit**

##### **FORMAT FOR AFFIDAVIT TO BE UPLOADED BY BA ALONGWITH THE EOI DOCUMENTS**

(To be executed in presence of Public notary on non-judicial stamp paper of the value of Rs. 100/-.  
The paper has to be in the name of the BA) \*\*

I..... (Name and designation) \*\* appointed as the attorney/authorized signatory of the BA (including its constituents),

M/s\_(hereinafter called the BA) for the purpose of the EOI documents for the work of as per the EOI No.

\_of (RailTel Corporation of India Ltd.), do hereby solemnly affirm and state on the behalf of the BA including its constituents as under:

1. I/we the BA (s), am/are signing this document after carefully reading the contents.
2. I/we the BA(s) also accept all the conditions of the EOI and have signed all the pages in confirmation thereof.
3. I/we hereby declare that I/we have downloaded the EOI documents from RailTel website [www.railtelindia.com](http://www.railtelindia.com). I/we have verified the content of the document from the website and there is no addition, no deletion or no alternation to be content of the EOI document. In case of any discrepancy noticed at any stage i.e. evaluation of EOI, execution of work or final payment of the contract, the master copy available with the RailTel Administration shall be final and binding upon me/us.
4. I/we declare and certify that I/we have not made any misleading or false representation in the forms, statements and attachments in proof of the qualification requirements.
5. I/we also understand that my/our offer will be evaluated based on the documents/credentials submitted along with the offer and same shall be binding upon me/us.
6. I/we declare that the information and documents submitted along with the EOI by me/us are correct and I/we are fully responsible for the correctness of the information and documents, submitted by us.
7. I/we undersigned that if the certificates regarding eligibility criteria submitted by us are found to be forged/false or incorrect at any time during process for evaluation of EOI, it shall lead to forfeiture of the EOI EMD besides banning of business for five years on entire RailTel. Further, I/we (insert name of the BA) \*\*\_and all my/our constituents understand that my/our constituents understand that my/our offer shall be summarily rejected.



8. I/we also understand that if the certificates submitted by us are found to be false/forged or incorrect at any time after the award of the contract, it will lead to termination of the contract, along with forfeiture of EMD/SD and Performance guarantee besides any other action provided in the contract including banning of business for five years on entire RailTel.

DEPONENT SEAL AND SIGNATURE  
OF THE BA

#### VERIFICATION

I/We above named EOI do hereby solemnly affirm and verify that the contents of my/our above affidavit are true and correct. Nothing has been concealed and no part of it is false.

DEPONENT SEAL AND SIGNATURE  
OF THE BA

Place:

Dated:

**\*\*The contents in Italics are only for guidance purpose. Details as appropriate, are to be filled in suitably by BA. Attestation before Magistrate/Notary Public.**

## **Annexure-5: Non-Disclosure Agreement (NDA) Format**

### **NON-DISCLOSURE AGREEMENT**

This Non-Disclosure Agreement (this “**Agreement**”) is made and entered into on this day of , 2024 (the “**Effective Date**”) at . By and between

**RailTel Corporation of India Limited, (CIN: L64202DL2000GOI107905)**, a Public Sector Undertaking under Ministry of Railways, Govt. of India, having its registered and corporate office at Plate-A, 6th Floor, Office Block, Tower -2, East Kidwai Nagar, New Delhi-110023, (hereinafter referred to as '**RailTel**'), which expression shall unless repugnant to the context or meaning thereof, deem to mean and include its successors and its permitted assignees of the ONE PART,

And

\_) (CIN: \_), a company duly incorporated under the provisions of Companies Act, having its registered office at

\_, (hereinafter referred to as ' \_'), which expression shall unless repugnant to the context or meaning thereof, deem to mean and include its successors and its permitted assignees of OTHER PART

RailTel and shall be individually referred to as “Party” and jointly as “Parties”

WHEREAS, RailTel and , each possesses confidential and proprietary information related to its business activities, including, but not limited to, that information designated as confidential or proprietary under Section 2 of this Agreement, as well as technical and non-technical information, patents, copyrights, trade secrets, know-how, financial data, design details and specifications, engineering, business and marketing strategies and plans, forecasts or plans, pricing strategies, formulas, procurement requirements, vendor and customer lists, inventions, techniques, sketches, drawings, models, processes, apparatus, equipment, algorithms, software programs, software source documents, product designs and the like, and third party confidential information (collectively, the “**Information**”);

WHEREAS, the Parties have initiated discussions regarding a possible business relationship for . WHEREAS, each Party accordingly desires to disclose certain Information (each Party, in such disclosing capacity, the “**Disclosing Party**”) to the other Party (each Party, in such receiving capacity, the “**Receiving Party**”) subject to the terms and conditions of this Agreement.

NOW THEREFORE, in consideration of the receipt of certain Information, and the mutual promises made in this Agreement, the Parties, intending to be legally bound, hereby agree as follows:

#### **Permitted Use.**

Receiving Party shall:

hold all Information received from Disclosing Party in confidence; use such Information for the purpose of evaluating the possibility of entering into a commercial arrangement between the Parties concerning such Information; and restrict disclosure of such Information to those of Receiving Party’s officers, directors, employees, affiliates, advisors, agents and consultants (collectively, the “**Representatives**”) who the Receiving Party, in its reasonable discretion, deems need to know such Information, and are bound by the terms and conditions of (1) this Agreement, or (2) an agreement with terms and conditions substantially similar to those set forth in this Agreement.

The restrictions on Receiving Party's use and disclosure of Information as set forth above shall not apply to any Information that Receiving Party can demonstrate: is wholly and independently developed by Receiving Party without the use of Information of Disclosing Party; at the time of disclosure to Receiving Party, was either (A) in the public domain, or (B) known to Receiving Party; is approved for release by written authorization of Disclosing Party; or is disclosed in response to a valid order of a court or other governmental body in the India or any political subdivision thereof, but only to the extent of, and for the purposes set forth in, such order; provided, however, that Receiving Party shall first and immediately notify Disclosing Party in writing of the order and permit Disclosing Party to seek an appropriate protective order.

(c) Both parties further agree to exercise the same degree of care that it exercises to protect its own Confidential Information of a like nature from unauthorised disclosure, but in no event shall a less than reasonable degree of care be exercised by either party.

**Designation.**

Information shall be deemed confidential and proprietary and subject to the restrictions of this Agreement if, when provided in:

written or other tangible form, such Information is clearly marked as proprietary or confidential when disclosed to Receiving Party; or oral or other intangible form, such Information is identified as confidential or proprietary at the time of disclosure.

**Cooperation.** Receiving Party will immediately give notice to Disclosing Party of any unauthorized use or disclosure of the Information of Disclosing Party.

**Ownership of Information.** All Information remains the property of Disclosing Party and no license or other rights to such Information is granted or implied hereby. Notwithstanding the foregoing, Disclosing Party understands that Receiving Party may currently or in the future be developing information internally, or receiving information from other parties that may be similar to Information of the Disclosing Party. Notwithstanding anything to the contrary, nothing in this Agreement will be construed as a representation or inference that Receiving Party will not develop products, or have products developed for it, that, without violation of this Agreement, compete with the products or systems contemplated by Disclosing Party's Information.

**No Obligation.** Neither this Agreement nor the disclosure or receipt of Information hereunder shall be construed as creating any obligation of a Party to furnish Information to the other Party or to enter into any agreement, venture or relationship with the other Party.

**Return or Destruction of Information.**

All Information shall remain the sole property of Disclosing Party and all materials containing any such Information (including all copies made by Receiving Party) and its Representatives shall be returned or destroyed by Receiving Party immediately upon the earlier of:

termination of this Agreement; expiration of this Agreement; or  
Receiving Party's determination that it no longer has a need for such Information.

Upon request of Disclosing Party, Receiving Party shall certify in writing that all Information received by Receiving Party (including all copies thereof) and all materials containing such Information (including all copies thereof) have been destroyed.

**Injunctive Relief:** Without prejudice to any other rights or remedies that a party may have, each party acknowledges and agrees that damages alone may not be an adequate remedy for any breach of this Agreement, and that a party shall be entitled to seek the remedies of injunction, specific performance and/or any other equitable relief for any threatened or actual breach of this Agreement

**Notice.**

Any notice required or permitted by this Agreement shall be in writing and shall be delivered as follows, with notice deemed given as indicated:

by personal delivery, when delivered personally; by overnight courier, upon written verification of receipt; or by certified or registered mail with return receipt requested, upon verification of receipt.

Notice shall be sent to the following addresses or such other address as either Party specifies in writing.

**RailTel Corporation of India limited:**

Attn: Address: \_

Phone:

Email.:

Attn: Address:

Phone:

Email:

### **Term, Termination and Survivability.**

Unless terminated earlier in accordance with the provisions of this agreement, this Agreement shall be in full force and effect for a period of years from the effective date hereof.

Each party reserves the right in its sole and absolute discretion to terminate this Agreement by giving the other party not less than 30 days' written notice of such termination.

Notwithstanding the foregoing clause 9(a) and 9 (b), Receiving Party agrees that its obligations, shall:

In respect to Information provided to it during the Term of this agreement, shall survive and continue even after the expiry of the term or termination of this agreement; and not apply to any materials or information disclosed to it thereafter.

**Governing Law and Jurisdiction.** This Agreement shall be governed in all respects solely and exclusively by the laws of India without regard to its conflicts of law principles. The Parties hereto expressly consent and submit themselves to the jurisdiction of the courts of New Delhi.

**Counterparts.** This agreement is executed in duplicate, each of which shall be deemed to be the original and both when taken together shall be deemed to form a single agreement

**No Definitive Transaction.** The Parties hereto understand and agree that no contract or agreement with respect to any aspect of a potential transaction between the Parties shall be deemed to exist unless and until a definitive written agreement providing for such aspect of the transaction has been executed by a duly authorized representative of each Party and duly delivered to the other Party (a "**Final Agreement**"), and the Parties hereby waive, in advance, any claims in connection with a possible transaction unless and until the Parties have entered into a Final Agreement.

### **Settlement of Disputes:**

The parties shall, at the first instance, attempt to resolve through good faith negotiation and consultation, any difference, conflict or question arising between the parties hereto relating to or concerning or arising out of or in connection with this agreement, and such negotiation or consultation shall begin promptly after a Party has delivered to another Party a written request for such consultation.

In the event of any dispute, difference, conflict or question arising between the parties hereto, relating to or concerning or arising out of or in connection with this agreement, is not settled through good faith negotiation or consultation, the same shall be referred to arbitration by a sole arbitrator.

The sole arbitrator shall be appointed by CMD/RailTel out of the panel of independent arbitrators maintained by RailTel, having expertise in their respective domains. The seat and the venue of arbitration shall be New Delhi. The arbitration proceedings shall be in accordance with the provision of the Arbitration and Conciliation Act 1996 and any other statutory amendments or modifications thereof. The decision of arbitrator shall be final and binding on both parties. The arbitration proceedings shall be conducted in English Language. The fees and cost of arbitration shall be borne equally between the parties.

### **CONFIDENTIALITY OF NEGOTIATIONS**

Without the Disclosing Party's prior written consent, the Receiving Party shall not disclose to any Person who is not a Representative of the Receiving Party the fact that Confidential Information has been made available to the Receiving Party or that it has inspected any portion of the Confidential Information or that discussions between the Parties may be taking place.

## **REPRESENTATION**

The Receiving Party acknowledges that the Disclosing Party makes no representation or warranty as to the accuracy or completeness of any of the Confidential Information furnished by or on its behalf. Nothing in this clause operates to limit or exclude any liability for fraudulent misrepresentation.

## **ASSIGNMENT**

Neither this Agreement nor any of the rights, interests or obligations under this Agreement shall be assigned, in whole or in part, by operation of law or otherwise by any of the Parties without the prior written consent of each of the other Parties. Any purported assignment without such consent shall be void. Subject to the preceding sentences, this Agreement will be binding upon, inure to the benefit of, and be enforceable by, the Parties and their respective successors and assigns. its Affiliates to advise their Representatives, contractors, subcontractors and licensees, of the obligations of confidentiality and non-use under this Agreement, and shall be responsible for ensuring compliance by its and its Affiliates' Representatives, contractors, subcontractors and licensees with such obligations. In addition, each Party shall require all persons and entities who are not employees of a Party and who are provided access to the Confidential Information, to execute confidentiality or non-disclosure agreements containing provisions no less stringent than those set forth in this Agreement. Each Party shall promptly notify the other Party in writing upon learning of any unauthorized disclosure or use of the Confidential Information by such persons or entities.

## **NO LICENSE**

Nothing in this Agreement is intended to grant any rights to under any patent, copyright, or other intellectual property right of the Disclosing Party, nor will this Agreement grant the Receiving Party any rights in or to the Confidential Information of the Disclosing Party, except as expressly set forth in this Agreement.

## **RELATIONSHIP BETWEEN PARTIES:**

Nothing in this Agreement or in any matter or any arrangement contemplated by it is intended to constitute a partnership, association, joint venture, fiduciary relationship or other cooperative entity between the parties for any purpose whatsoever. Neither party has any power or authority to bind the other party or impose any obligations on it and neither party shall purport to do so or hold itself out as capable of doing so.

## **20: UNPULISHED PRICE SENSITIVE INFORMATION (UPSI)**

agrees and acknowledges that , its Partners, employees, representatives etc., by virtue of being associated with RailTel and being in frequent communication with RailTel and its employees, shall be deemed to be "Connected Persons" within the meaning of SEBI (Prohibition of Insider Trading) Regulations, 2015 and shall be bound by the said regulations while dealing with any confidential and/ or price sensitive information of RailTel. shall always and at all times comply with the obligations and restrictions contained in the said regulations. In terms of the said regulations, shall abide by the restriction on communication, providing or allowing access to any Unpublished Price Sensitive Information (UPSI) relating to RailTel as well as restriction on trading of its stock while holding such Unpublished Price Sensitive Information relating to RailTel

**MISCELLANEOUS.** This Agreement constitutes the entire understanding among the Parties as to the Information and supersedes all prior discussions between them relating thereto. No amendment or modification of this Agreement shall be valid or binding on the Parties unless made in writing and signed on behalf of each Party by its authorized representative. The failure or delay of any Party to enforce at any time any provision of this Agreement shall not constitute a waiver of such Party's right thereafter to enforce each and every provision of this Agreement. In the event that any of the terms, conditions or provisions of this Agreement are held to be illegal, unenforceable or invalid by any court of competent jurisdiction, the remaining terms, conditions or provisions hereof shall remain in full force and effect. The rights, remedies and obligations set forth herein are in addition to, and not in substitution of, any rights, remedies or obligations which may be granted or imposed under law or in equity. IN WITNESS WHEREOF, the Parties have executed this Agreement on the date set forth above.

\_: RailTel Corporation of India Limited:

By\_By\_Name: Name:  
Title: Title:

Witnesses

**Annexure-6**

**BoQ format attached.**

**Duly filled & Password protected BoQ will be mailed separately by bidder.**



**Annexure 7**

**Power of Attorney or Board Resolution in favor of one of its employees who will sign the Bid Documents.**

**Annexure-8**

**“Declaration regarding all technical compliance along with MAF released by OEM, who has declared that their product is technically complied”.**

यह, रुचि की अभिव्यक्ति ” दस्तावेज सूचीबद्ध व्यावसायिक सहयोगियों या OEM या OEM के अधिकृत भागीदार/वितरक में से “सिम्हास्थ कुंभ मेला 2028 के लिए एकीकृत कमान एवं नियंत्रण केंद्र (आईसीसीसी) की स्थापना और संचालन एवं रखरखाव हेतु सिस्टम इंटीग्रेटर (एसआई) कार्य के लिए व्यावसायिक साझेदार का चयन।”

इसके बाद अंतिम ग्राहक से आने वाले सभी सूचना/संवाद/नियम चयनित भागीदार पर भी लागू होंगे।  
कृपया सम्पूर्ण दस्तावेज पढ़ें एवं जिम्मेदारी पूर्ण तरीके से प्रस्ताव जमा करें।

भवदीय,

(आनंद कुमार)

संयुक्त महाप्रबंधक/विपणन/आरसीआईएल

Validate

Print

Help

**Item Rate BoQ**

Tender Inviting Authority: ED

Name of Work: Selection of System Integrator (SI) for Establishment and O&amp;M of Integrated Command &amp; Control Centre (ICCC) for Simhashta Kumbh Mela 2028

Contract No: USCL/430

| Name of the Bidder/ Bidding Firm / Company : |                                                                                                 |          |        |                                         |                                                            |                            |                       |
|----------------------------------------------|-------------------------------------------------------------------------------------------------|----------|--------|-----------------------------------------|------------------------------------------------------------|----------------------------|-----------------------|
| PRICE SCHEDULE                               |                                                                                                 |          |        |                                         |                                                            |                            |                       |
| NUMBER #                                     | TEXT #                                                                                          | NUMBER # | TEXT # | TEXT #                                  | NUMBER #                                                   | NUMBER #                   | TEXT #                |
| Sl. No.                                      | Item Description                                                                                | Quantity | Units  | Quoted Currency in INR / Other Currency | BASIC RATE In Figures To be entered by the Bidder<br>Rs. P | TOTAL AMOUNT Without Taxes | TOTAL AMOUNT In Words |
| 1                                            | 2                                                                                               | 4        | 5      | 12                                      | 13                                                         | 53                         | 55                    |
| 1                                            | <b>A - Permanent Infrastructure (CAPEX)<br/>Surveillance &amp; Field Sensing Infrastructure</b> |          |        |                                         |                                                            |                            |                       |
| 1.01                                         | Fixed/Bullet IP Cameras                                                                         | 1151.00  | Nos    | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 1.02                                         | PTZ Cameras                                                                                     | 412.00   | Nos    | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 1.03                                         | Panoramic Cameras                                                                               | 18.00    | Nos    | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 1.04                                         | Thermal Cameras                                                                                 | 24.00    | Nos    | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 1.05                                         | ANPR Cameras                                                                                    | 29.00    | Nos    | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 1.06                                         | Drones                                                                                          | 10.00    | No     | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 1.07                                         | Drone Integration Infrastructure                                                                | 1.00     | Lot    | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 1.08                                         | Video Encoders/Edge Devices                                                                     | 1.00     | Lot    | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 2                                            | <b>A - Permanent Infrastructure (CAPEX)<br/>Enterprise Software Platforms</b>                   |          |        |                                         |                                                            |                            |                       |
| 2.01                                         | Enterprise VMS Platform including licenses & failover                                           | 1.00     | Lot    | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 2.02                                         | AI Video Analytics Platform including crowd & safety analytics                                  | 1.00     | Lot    | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 2.03                                         | Digital Twin & Decision Intelligence Platform                                                   | 1.00     | Lot    | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 2.04                                         | GIS & Geospatial Visualization Platform                                                         | 1.00     | Lot    | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 2.05                                         | ICCC Integrated Application Platform                                                            | 1.00     | Lot    | INR                                     |                                                            | 0.00                       | INR Zero Only         |

|      |                                                                                           |         |     |     |  |      |               |
|------|-------------------------------------------------------------------------------------------|---------|-----|-----|--|------|---------------|
| 2.06 | Mobile Application for Pilgrims/Visitors                                                  | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 2.07 | ITSM / EMS / SLA Management Platform                                                      | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 2.08 | Dispatcher & Communication Management Platform                                            | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 3    | <b>A - Permanent Infrastructure (CAPEX)<br/>Communication Network Infrastructure</b>      |         |     |     |  |      |               |
| 3.01 | OFC Backbone Infrastructure                                                               | 1100.00 | Km  | INR |  | 0.00 | INR Zero Only |
| 3.02 | HDPE Ducting Infrastructure                                                               | 900.00  | Km  | INR |  | 0.00 | INR Zero Only |
| 3.03 | Field Network Switches                                                                    | 447.00  | Nos | INR |  | 0.00 | INR Zero Only |
| 3.04 | Wireless / RF / Wi-Fi Infrastructure                                                      | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 3.05 | Network Monitoring & Management System                                                    | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 3.06 | Field Network Cabinets / Junction Infrastructure                                          | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 3.07 | Dashboard & Reporting                                                                     | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 4    | <b>A - Permanent Infrastructure (CAPEX)<br/>Data Center / DR / Compute Infrastructure</b> |         |     |     |  |      |               |
| 4.01 | Data Center Compute Infrastructure                                                        | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 4.02 | GPU Infrastructure for AI Processing                                                      | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 4.03 | SAN/NAS Storage Infrastructure                                                            | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 4.04 | Backup & Archival Infrastructure                                                          | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 4.05 | Disaster Recovery Infrastructure                                                          | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 4.06 | Virtualization & Cloud Management Platform                                                | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 4.07 | Server Farm & Core Network Infrastructure                                                 | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 4.08 | Rack, Power, UPS & Electrical Infrastructure                                              | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 4.09 | DG Set Infrastructure                                                                     | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 5    | <b>A - Permanent Infrastructure (CAPEX)<br/>Cybersecurity Infrastructure</b>              |         |     |     |  |      |               |
| 5.01 | Next Generation Firewall (NGFW)                                                           | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 5.02 | IDS/IPS Infrastructure                                                                    | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 5.03 | SIEM Platform                                                                             | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 5.04 | Endpoint Security / EDR Solution                                                          | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |
| 5.05 | MDR/XDR Platform                                                                          | 1.00    | Lot | INR |  | 0.00 | INR Zero Only |

|      |                                                                                                                                            |        |     |     |  |      |               |
|------|--------------------------------------------------------------------------------------------------------------------------------------------|--------|-----|-----|--|------|---------------|
| 5.06 | VAPT & Security Audit Tools/Services                                                                                                       | 1.00   | Lot | INR |  | 0.00 | INR Zero Only |
| 5.07 | Log Management & Cyber Monitoring Infrastructure                                                                                           | 1.00   | Lot | INR |  | 0.00 | INR Zero Only |
| 5.08 | Network Racks                                                                                                                              | 2.00   | Nos | INR |  | 0.00 | INR Zero Only |
| 6    | <b>A - Permanent Infrastructure (CAPEX)<br/>ICCC, War Room &amp; Viewing Center Infrastructure</b>                                         |        |     |     |  |      |               |
| 6.01 | Integrated ICCC Infrastructure including interiors, video wall, AV systems, consoles, furniture, power systems & associated infrastructure | 1.00   | Lot | INR |  | 0.00 | INR Zero Only |
| 6.02 | Mini War Room at Ranoji ki Chhatri (20-Seater) – Complete Integrated Setup                                                                 | 1.00   | Lot | INR |  | 0.00 | INR Zero Only |
| 6.03 | Fully Integrated Viewing Centers                                                                                                           | 10.00  | Nos | INR |  | 0.00 | INR Zero Only |
| 6.04 | Operator Workstations with required accessories & licenses                                                                                 | 50.00  | Nos | INR |  | 0.00 | INR Zero Only |
| 6.05 | Indoor Surveillance & Access Control for ICCC                                                                                              | 1.00   | Lot | INR |  | 0.00 | INR Zero Only |
| 7    | <b>A - Permanent Infrastructure (CAPEX)<br/>Field Infrastructure</b>                                                                       |        |     |     |  |      |               |
| 7.01 | Camera Poles with mounting accessories                                                                                                     | 796.00 | Nos | INR |  | 0.00 | INR Zero Only |
| 7.02 | Mounting Structures                                                                                                                        | 796.00 | Nos | INR |  | 0.00 | INR Zero Only |
| 7.03 | Outdoor Cabinets / Junction Boxes                                                                                                          | 442.00 | Nos | INR |  | 0.00 | INR Zero Only |
| 7.04 | UPS Systems                                                                                                                                | 442.00 | Nos | INR |  | 0.00 | INR Zero Only |
| 7.05 | Earthing & Lightning Protection                                                                                                            | 1.00   | Lot | INR |  | 0.00 | INR Zero Only |
| 7.06 | Field Power & Electrical Infrastructure                                                                                                    | 1.00   | Lot | INR |  | 0.00 | INR Zero Only |
| 7.07 | Public Address System Infrastructure                                                                                                       | 1.00   | Lot | INR |  | 0.00 | INR Zero Only |
| 8    | <b>B - Temporary / Rental Infrastructure<br/>Temporary Surveillance Infrastructure<br/>(9 Months)</b>                                      |        |     |     |  |      |               |
| 8.01 | Temporary Fixed Cameras                                                                                                                    | 990.00 | Nos | INR |  | 0.00 | INR Zero Only |
| 8.02 | Temporary PTZ Cameras                                                                                                                      | 176.00 | Nos | INR |  | 0.00 | INR Zero Only |
| 8.03 | Temporary Panoramic Cameras                                                                                                                | 42.00  | Nos | INR |  | 0.00 | INR Zero Only |
| 8.04 | Temporary Thermal Cameras                                                                                                                  | 56.00  | Nos | INR |  | 0.00 | INR Zero Only |
| 8.05 | Temporary ANPR Systems                                                                                                                     | 444.00 | Nos | INR |  | 0.00 | INR Zero Only |
| 8.06 | Mobile Surveillance Units                                                                                                                  | 50.00  | Nos | INR |  | 0.00 | INR Zero Only |
| 8.07 | Drone Surveillance Systems                                                                                                                 | 20.00  | Nos | INR |  | 0.00 | INR Zero Only |

|       |                                                                                                                                                           |         |      |     |  |      |               |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------|-----|--|------|---------------|
| 8.08  | Underwater Surveillance Systems                                                                                                                           | 30.00   | Nos  | INR |  | 0.00 | INR Zero Only |
| 8.09  | Body-Worn Cameras                                                                                                                                         | 2000.00 | Nos  | INR |  | 0.00 | INR Zero Only |
| 8.11  | Dash Cameras                                                                                                                                              | 400.00  | Nos  | INR |  | 0.00 | INR Zero Only |
| 9     | <b>B - Temporary / Rental Infrastructure</b><br><b>Temporary Communication &amp; Network Infrastructure</b><br><b>(9 Months)</b>                          |         |      |     |  |      |               |
| 9.01  | Temporary OFC/RF/Wireless Connectivity Infrastructure                                                                                                     | 1.00    | Lot  | INR |  | 0.00 | INR Zero Only |
| 9.02  | Temporary Field Network Infrastructure                                                                                                                    | 1.00    | Lot  | INR |  | 0.00 | INR Zero Only |
| 9.03  | Temporary Power Connectivity Infrastructure                                                                                                               | 1.00    | Lot  | INR |  | 0.00 | INR Zero Only |
| 9.04  | Temporary Wi-Fi / RF Systems                                                                                                                              | 1.00    | Lot  | INR |  | 0.00 | INR Zero Only |
| 10    | <b>B - Temporary / Rental Infrastructure</b><br><b>Enterprise Radio / Wireless Communication System</b><br><b>(9 Months)</b>                              |         |      |     |  |      |               |
| 10.01 | Digital Handheld Wireless Communication System including handheld devices, repeaters, dispatch console, charging units, batteries, software & accessories | 1.00    | Lot  | INR |  | 0.00 | INR Zero Only |
| 11    | <b>B - Temporary / Rental Infrastructure</b><br><b>Temporary Field Infrastructure</b><br><b>(9 Months)</b>                                                |         |      |     |  |      |               |
| 11.01 | Temporary Poles & Mounting Infrastructure                                                                                                                 | 650.00  | Nos  | INR |  | 0.00 | INR Zero Only |
| 11.02 | Temporary Outdoor Cabinets                                                                                                                                | 526.00  | Nos  | INR |  | 0.00 | INR Zero Only |
| 11.03 | DG/UPS Support Infrastructure                                                                                                                             | 1.00    | Lot  | INR |  | 0.00 | INR Zero Only |
| 11.04 | Temporary Power Infrastructure                                                                                                                            | 1.00    | Lot  | INR |  | 0.00 | INR Zero Only |
| 11.05 | Temporary Public Address System Infrastructure                                                                                                            | 1.00    | Lot  | INR |  | 0.00 | INR Zero Only |
| 11.06 | Emergency Call Box (ECB) Infrastructure                                                                                                                   | 1.00    | Lot  | INR |  | 0.00 | INR Zero Only |
| 12    | <b>C- O&amp;M for Permanent Infrastructure</b><br><b>O&amp;M for Permanent Infrastructure - Year- 1</b>                                                   |         |      |     |  |      |               |
| 12.01 | Surveillance Systems                                                                                                                                      | 1.00    | Year | INR |  | 0.00 | INR Zero Only |
| 12.02 | Enterprise Software Platforms                                                                                                                             | 1.00    | Year | INR |  | 0.00 | INR Zero Only |
| 12.03 | Communication Network                                                                                                                                     | 1.00    | Year | INR |  | 0.00 | INR Zero Only |
| 12.04 | Data Center / DR Infrastructure                                                                                                                           | 1.00    | Year | INR |  | 0.00 | INR Zero Only |
| 12.05 | Cybersecurity Systems                                                                                                                                     | 1.00    | Year | INR |  | 0.00 | INR Zero Only |

|       |                                                                                                   |      |      |     |  |      |               |
|-------|---------------------------------------------------------------------------------------------------|------|------|-----|--|------|---------------|
| 12.06 | ICCC / Viewing Centers / War Room                                                                 | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 12.07 | Field Infrastructure                                                                              | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 12.08 | Helpdesk & Support Services                                                                       | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 12.09 | Manpower Deployment                                                                               | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 12.11 | Spare & Consumable Management                                                                     | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 13    | <b>C- O&amp;M for Permanent Infrastructure<br/>O&amp;M for Permanent Infrastructure - Year- 2</b> |      |      |     |  |      |               |
| 13.01 | Surveillance Systems                                                                              | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 13.02 | Enterprise Software Platforms                                                                     | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 13.03 | Communication Network                                                                             | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 13.04 | Data Center / DR Infrastructure                                                                   | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 13.05 | Cybersecurity Systems                                                                             | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 13.06 | ICCC / Viewing Centers / War Room                                                                 | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 13.07 | Field Infrastructure                                                                              | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 13.08 | Helpdesk & Support Services                                                                       | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 13.09 | Manpower Deployment                                                                               | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 13.11 | Spare & Consumable Management                                                                     | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 14    | <b>C- O&amp;M for Permanent Infrastructure<br/>O&amp;M for Permanent Infrastructure - Year- 3</b> |      |      |     |  |      |               |
| 14.01 | Surveillance Systems                                                                              | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 14.02 | Enterprise Software Platforms                                                                     | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 14.03 | Communication Network                                                                             | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 14.04 | Data Center / DR Infrastructure                                                                   | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 14.05 | Cybersecurity Systems                                                                             | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 14.06 | ICCC / Viewing Centers / War Room                                                                 | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 14.07 | Field Infrastructure                                                                              | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 14.08 | Helpdesk & Support Services                                                                       | 1.00 | Year | INR |  | 0.00 | INR Zero Only |
| 14.09 | Manpower Deployment                                                                               | 1.00 | Year | INR |  | 0.00 | INR Zero Only |



|       |                                                                                                                            |      |       |     |  |      |               |
|-------|----------------------------------------------------------------------------------------------------------------------------|------|-------|-----|--|------|---------------|
| 14.11 | Spare & Consumable Management                                                                                              | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 15    | <b>C- O&amp;M for Permanent Infrastructure</b><br><b>O&amp;M for Permanent Infrastructure - Year- 4</b>                    |      |       |     |  |      |               |
| 15.01 | Surveillance Systems                                                                                                       | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 15.02 | Enterprise Software Platforms                                                                                              | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 15.03 | Communication Network                                                                                                      | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 15.04 | Data Center / DR Infrastructure                                                                                            | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 15.05 | Cybersecurity Systems                                                                                                      | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 15.06 | ICCC / Viewing Centers / War Room                                                                                          | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 15.07 | Field Infrastructure                                                                                                       | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 15.08 | Helpdesk & Support Services                                                                                                | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 15.09 | Manpower Deployment                                                                                                        | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 15.11 | Spare & Consumable Management                                                                                              | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 16    | <b>C- O&amp;M for Permanent Infrastructure</b><br><b>O&amp;M for Permanent Infrastructure - Year- 5</b>                    |      |       |     |  |      |               |
| 16.01 | Surveillance Systems                                                                                                       | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 16.02 | Enterprise Software Platforms                                                                                              | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 16.03 | Communication Network                                                                                                      | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 16.04 | Data Center / DR Infrastructure                                                                                            | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 16.05 | Cybersecurity Systems                                                                                                      | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 16.06 | ICCC / Viewing Centers / War Room                                                                                          | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 16.07 | Field Infrastructure                                                                                                       | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 16.08 | Helpdesk & Support Services                                                                                                | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 16.09 | Manpower Deployment                                                                                                        | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 16.11 | Spare & Consumable Management                                                                                              | 1.00 | Year  | INR |  | 0.00 | INR Zero Only |
| 17    | <b>D- O&amp;M for Temporary Infrastructure (9 Months including manpower)</b><br><b>Temporary Infrastructure (9 Months)</b> |      |       |     |  |      |               |
| 17.01 | Temporary Surveillance Operations                                                                                          | 9.00 | Month | INR |  | 0.00 | INR Zero Only |

|                      |                                               |               |       |     |  |      |               |
|----------------------|-----------------------------------------------|---------------|-------|-----|--|------|---------------|
| 17.02                | Temporary Communication Operations            | 9.00          | Month | INR |  | 0.00 | INR Zero Only |
| 17.03                | Temporary ICCC Support Operations             | 9.00          | Month | INR |  | 0.00 | INR Zero Only |
| 17.04                | Temporary Field Infrastructure Operations     | 9.00          | Month | INR |  | 0.00 | INR Zero Only |
| 17.05                | Temporary Manpower & Event Operations Support | 9.00          | Month | INR |  | 0.00 | INR Zero Only |
| Total in Figures     |                                               |               |       |     |  | 0.00 | INR Zero Only |
| Quoted Rate in Words |                                               | INR Zero Only |       |     |  |      |               |

Validate

Print

Help

**Item Rate BoQ**

Tender Inviting Authority: ED

Name of Work: Selection of System Integrator (SI) for Establishment and O&amp;M of Integrated Command &amp; Control Centre (ICCC) for Simhastha Kumbh Mela 2028

Contract No: USCL/430

| Name of the Bidder/ Bidding Firm / Company : |                                                                    |          |          |                                         |                                                            |                            |                       |
|----------------------------------------------|--------------------------------------------------------------------|----------|----------|-----------------------------------------|------------------------------------------------------------|----------------------------|-----------------------|
| PRICE SCHEDULE                               |                                                                    |          |          |                                         |                                                            |                            |                       |
| NUMBER #                                     | TEXT #                                                             | NUMBER # | TEXT #   | TEXT #                                  | NUMBER #                                                   | NUMBER #                   | TEXT #                |
| Sl. No.                                      | Item Description<br>(Items not considered for evaluation)          | Quantity | Units    | Quoted Currency in INR / Other Currency | BASIC RATE In Figures To be entered by the Bidder<br>Rs. P | TOTAL AMOUNT Without Taxes | TOTAL AMOUNT In Words |
| 1                                            | 2                                                                  | 4        | 5        | 12                                      | 13                                                         | 53                         | 55                    |
| 1                                            | F- Optional/Future Expansion Items (Not considered for evaluation) |          |          |                                         |                                                            |                            |                       |
|                                              | <b>OPTIONAL / FUTURE EXPANSION ITEMS</b>                           |          |          |                                         |                                                            |                            |                       |
| 1.01                                         | Additional Fixed Cameras                                           | 60.00    | Nos      | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 1.02                                         | Additional PTZ Cameras                                             | 20.00    | Nos      | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 1.03                                         | Additional Thermal Cameras                                         | 10.00    | Nos      | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 1.04                                         | Additional Analytics Modules                                       | 1.00     | Lot      | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 1.05                                         | LiDAR-Based Analytics                                              | 1.00     | Lot      | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 1.06                                         | Additional Viewing Centers                                         | 1.00     | Nos      | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 1.07                                         | Additional Storage Capacity                                        | 1000.00  | TB       | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 1.08                                         | Additional AI GPU Capacity                                         | 1.00     | Lot      | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 1.09                                         | Additional Wireless Communication Sets                             | 100.00   | Nos      | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 2                                            | F- Optional/Future Expansion Items (Not considered for evaluation) |          |          |                                         |                                                            |                            |                       |
|                                              | <b>RATE DISCOVERY / CHANGE REQUEST ITEMS</b>                       |          |          |                                         |                                                            |                            |                       |
| 2.01                                         | Additional Fixed Camera Deployment                                 | 1.00     | Per Unit | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 2.02                                         | Additional PTZ Camera Deployment                                   | 1.00     | Per Unit | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 2.03                                         | Additional Thermal Camera Deployment                               | 1.00     | Per Unit | INR                                     |                                                            | 0.00                       | INR Zero Only         |
| 2.04                                         | Additional ANPR Deployment                                         | 1.00     | Per Unit | INR                                     |                                                            | 0.00                       | INR Zero Only         |

|                             |                                       |                      |            |     |  |             |               |
|-----------------------------|---------------------------------------|----------------------|------------|-----|--|-------------|---------------|
| 2.05                        | Additional Pole Installation          | 1.00                 | Per Unit   | INR |  | 0.00        | INR Zero Only |
| 2.06                        | Additional OFC Deployment             | 1.00                 | Per Km     | INR |  | 0.00        | INR Zero Only |
| 2.07                        | Additional Operator Workstation       | 1.00                 | Per Unit   | INR |  | 0.00        | INR Zero Only |
| 2.08                        | Additional Viewing Center             | 1.00                 | Per Unit   | INR |  | 0.00        | INR Zero Only |
| 2.09                        | Additional Analytics License          | 1.00                 | Per Module | INR |  | 0.00        | INR Zero Only |
| 2.11                        | Additional Storage Capacity           | 1.00                 | Per TB     | INR |  | 0.00        | INR Zero Only |
| 2.12                        | Additional Wireless Communication Set | 1.00                 | Per Unit   | INR |  | 0.00        | INR Zero Only |
| 2.13                        | Additional Temporary Deployment       | 1.00                 | Per Month  | INR |  | 0.00        | INR Zero Only |
| <b>Total in Figures</b>     |                                       |                      |            |     |  | <b>0.00</b> | INR Zero Only |
| <b>Quoted Rate in Words</b> |                                       | <b>INR Zero Only</b> |            |     |  |             |               |

# Ujjain Smart City Limited



Request for Proposal for  
Selection of System Integrator (SI) for  
Establishment and O&M of Integrated Command & Control Centre (ICCC) for  
Simhastha Kumbh Mela 2028

**Volume – 1: Instructions to Bidders and Bid Process Management**

NIT No. USCL/430

Tender ID: 2026\_UAD\_508730\_1 Ujjain Date: 20/05/2026

.....

**Ujjain Smart City Limited  
Simhastha Mela Office, Kothi Road,  
Ujjain, Madhya Pradesh – 456010**

## **Establishment and O&M of Integrated Command & Control Centre (ICCC) for Simhastha Kumbh Mela 2028**

### **VOLUMES STRUCTURE OF RFP DOCUMENTS**

| <b>Volume</b> | <b>Contents</b>                                    |
|---------------|----------------------------------------------------|
| Volume-I      | Instructions to Bidders and Bid Process Management |
| Volume-II     | Scope of Work & Technical Specifications           |
| Volume-III    | Draft Contract Agreement & SLA                     |
| Volume-IV     | Financial Bid / BOQ                                |

## Volume – 1: Instructions to Bidders and Bid Process Management

### TABLE OF CONTENTS

| Section         | Title                               |
|-----------------|-------------------------------------|
| Disclaimer      | Disclaimer                          |
| Important Dates | Important Dates                     |
| Glossary        | Glossary / Abbreviations            |
| Definitions     | Definitions                         |
| Fact Sheet      | Fact Sheet                          |
| Section 1       | Instructions to Bidders             |
| Section 2       | Selection Methodology               |
| Section 3       | Evaluation Process                  |
| Section 4       | Award of Contract                   |
| Section 5       | General Conditions & Bid Governance |
| Section 6       | Project Background                  |
| Section 7       | Scope Overview                      |
| Annexure 1      | PQ Bid Formats                      |
| Annexure 2      | Technical Bid Formats               |
| Annexure 3      | Commercial Bid Formats              |
| Annexure 4      | EMD Format                          |
| Annexure 5      | Performance Security Format         |
| Annexure 6      | Consortium Agreement                |
| Annexure 7      | Integrity Pact                      |
| Annexure 8      | Non-Disclosure Agreement            |
| Annexure 9      | OEM Authorization Format            |
| Annexure 10     | Compliance Matrix                   |

## DISCLAIMER

The information contained in this Request for Proposal (“RFP”) document or subsequently provided to Bidder(s), whether verbally or in documentary or any other form, by Ujjain Smart City Limited (“USCL” / “Authority”) or any of its employees, representatives, advisors, or consultants, is provided to the Bidder(s) on the terms and conditions set out in this RFP and such other terms and conditions subject to which such information is provided.

This RFP is neither an agreement nor an offer and is issued by the Authority solely for the purpose of inviting bids for selection of a System Integrator (SI) for the “Establishment and Operation & Maintenance (O&M) of Integrated Command & Control Centre (ICCC) for Simhastha Kumbh Mela 2028, Ujjain”. The purpose of this RFP is to provide interested parties with information that may be useful in preparation and submission of their proposals.

This RFP includes statements, assumptions, assessments, estimates, projections, and information prepared by the Authority in good faith for the purpose of this Project. Such information may not be complete, accurate, adequate, or exhaustive. Each Bidder should, therefore, conduct its own investigations, studies, analysis, and due diligence and seek independent professional, technical, legal, financial, and other advice as may be required for preparation of its Bid.

The Authority, its employees, advisors, and consultants make no representation or warranty, express or implied, as to the accuracy, reliability, completeness, or suitability of the information contained in this RFP or otherwise provided to the Bidders. The Authority shall not be liable for any loss, damage, cost, or expense arising in any way from reliance on the information contained in this RFP or otherwise provided during the bidding process.

The Authority reserves the right to:

- amend, modify, supplement, or withdraw this RFP or any part thereof;
- change the project scope, timelines, technical requirements, or process;
- reject any or all bids without assigning any reason;
- annul the bidding process at any stage without incurring any liability whatsoever to the Bidders.

The issuance of this RFP does not imply that the Authority is bound to select any Bidder or appoint the Selected Bidder, and the Authority reserves the absolute right to reject all or any of the Bids without assigning any reason whatsoever.

The Bidder shall bear all costs associated with preparation and submission of the Bid, including but not limited to site visits, presentations, demonstrations, Proof of Concept (PoC), technical discussions, and participation in the bidding process. The Authority shall not be responsible or liable for any such costs, regardless of the conduct or outcome of the bidding process.

The Bidder is expected to examine all instructions, forms, terms, technical specifications, and other information contained in this RFP. Failure to furnish any information required under the RFP or submission of a Bid not substantially responsive to the RFP in every respect may result in rejection of the Bid.

All information, documents, and data shared as part of this RFP process shall be treated as confidential by the Bidder and shall not be disclosed to any third party except as required for preparation of the



Bid or as required under applicable law.

This RFP and the bidding process shall be governed by the laws of India. Subject to the applicable dispute resolution provisions, the courts at Ujjain/Bhopal, Madhya Pradesh shall have exclusive jurisdiction over all disputes arising out of or relating to this RFP process.

The Project comprises a hybrid deployment model involving:

- (i) permanent CAPEX-based infrastructure with long-term operational utility and 60 months of O&M; and
- (ii) temporary/event-specific rental infrastructure with approximately 9 months of deployment and O&M during Simhastha 2028 operations.

The Authority reserves the right to optimize, increase, reduce, convert, or reclassify any component between permanent and temporary deployment categories depending upon operational requirements, approvals, budget availability, site conditions, and implementation strategy.

## IMPORTANT DATES

| S. No. | Activity                                                                                    | Deadline                                                                                                                                                                                                                |
|--------|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1      | Release of RFP                                                                              | 20/05/2026                                                                                                                                                                                                              |
| 2      | Last date of receipt of queries on RFP                                                      | Bidders shall have to post Prebid queries by email to <a href="mailto:ujjainsmartcity@mpurban.gov.in">ujjainsmartcity@mpurban.gov.in</a> on or before 01/06/2026 till 15:00 hrs                                         |
| 3      | Date of Prebid Meeting                                                                      | 01/06/2026 till 15:00 hrs<br>At Office of Executive Director<br>Ujjain Smart City Limited<br>Simhastha Mela Office, Kothi Road,<br>Ujjain, Madhya Pradesh – 456010<br>A Site-visit will also be conducted at 11:00 hrs. |
| 4      | Last date for Submission of Bids                                                            | 22/06/2026; upto 17:00 hrs                                                                                                                                                                                              |
| 5      | Date of opening of Technical Bids                                                           | 23/06/2026; at 17:00 hrs                                                                                                                                                                                                |
| 6      | Date of Technical Presentation of Solution and Approach and Methodology and live Demo / POC | To be notified to all eligible bidders later                                                                                                                                                                            |
| 7      | Date of opening of financial bids                                                           | To be notified to technically qualified bidders later                                                                                                                                                                   |

## GLOSSARY / ABBREVIATIONS

| Abbreviation | Description                                              |
|--------------|----------------------------------------------------------|
| AI           | Artificial Intelligence                                  |
| ANPR         | Automatic Number Plate Recognition                       |
| AP           | Access Point                                             |
| API          | Application Programming Interface                        |
| ATCS         | Adaptive Traffic Control System                          |
| BoM          | Bill of Material                                         |
| CAPEX        | Capital Expenditure                                      |
| CCC          | Command and Control Center                               |
| CCTV         | Closed Circuit Television                                |
| CERT-In      | Indian Computer Emergency Response Team                  |
| CSP          | Cloud Service Provider                                   |
| DC           | Data Center                                              |
| DBA          | Database Administrator                                   |
| DR           | Disaster Recovery                                        |
| DRC          | Disaster Recovery Center                                 |
| DT           | Digital Twin                                             |
| EMS          | Enterprise Management System                             |
| EMD          | Earnest Money Deposit                                    |
| ESB          | Enterprise Service Bus                                   |
| FRS          | Facial Recognition System                                |
| GIS          | Geographic Information System                            |
| GPS          | Global Positioning System                                |
| GPU          | Graphics Processing Unit                                 |
| GUI          | Graphical User Interface                                 |
| IA           | Implementation Agency                                    |
| IaaS         | Infrastructure as a Service                              |
| ICCC         | Integrated Command & Control Centre                      |
| ICT          | Information and Communication Technology                 |
| IDS/IPS      | Intrusion Detection System / Intrusion Prevention System |
| IoT          | Internet of Things                                       |
| IP           | Internet Protocol                                        |
| IPSEC        | Internet Protocol Security                               |

|       |                                                  |
|-------|--------------------------------------------------|
| IT    | Information Technology                           |
| KPI   | Key Performance Indicator                        |
| LAN   | Local Area Network                               |
| LED   | Light Emitting Diode                             |
| LiDAR | Light Detection and Ranging                      |
| LoI   | Letter of Intent                                 |
| LACP  | Link Aggregation Control Protocol                |
| MeitY | Ministry of Electronics & Information Technology |
| MoHUA | Ministry of Housing & Urban Affairs              |
| MoU   | Memorandum of Understanding                      |
| MPLS  | Multi-Protocol Label Switching                   |
| MTTR  | Mean Time to Repair                              |
| NVR   | Network Video Recorder                           |
| OEM   | Original Equipment Manufacturer                  |
| OFC   | Optical Fiber Cable                              |
| O&M   | Operation and Maintenance                        |
| ONVIF | Open Network Video Interface Forum               |
| OS    | Operating System                                 |
| OTDR  | Optical Time Domain Reflectometer                |
| PaaS  | Platform as a Service                            |
| PDU   | Power Distribution Unit                          |
| PMO   | Project Management Office                        |
| PoC   | Proof of Concept / Pilot Demonstration           |
| PoP   | Point of Presence                                |
| PTZ   | Pan Tilt Zoom                                    |
| QoS   | Quality of Service                               |
| RBAC  | Role-Based Access Control                        |
| REST  | Representational State Transfer                  |
| RF    | Radio Frequency                                  |
| RoW   | Right of Way                                     |
| RFP   | Request for Proposal                             |
| RPO   | Recovery Point Objective                         |
| RTO   | Recovery Time Objective                          |
| SaaS  | Software as a Service                            |

|       |                                                |
|-------|------------------------------------------------|
| SCM   | Smart Cities Mission                           |
| SDK   | Software Development Kit                       |
| SI    | System Integrator                              |
| SIEM  | Security Information and Event Management      |
| SLA   | Service Level Agreement                        |
| SMPS  | Switched Mode Power Supply                     |
| SMS   | Short Message Service                          |
| SNMP  | Simple Network Management Protocol             |
| SOC   | Security Operations Centre                     |
| SOP   | Standard Operating Procedure                   |
| SRS   | System Requirement Study                       |
| TPA   | Third Party Auditor                            |
| TRAI  | Telecom Regulatory Authority of India          |
| TRS   | Technical Requirement Specifications           |
| UAT   | User Acceptance Testing                        |
| UPS   | Uninterrupted Power Supply                     |
| URL   | Uniform Resource Locator                       |
| USCL  | Ujjain Smart City Limited                      |
| VA    | Video Analytics                                |
| VATP  | Vulnerability Assessment & Penetration Testing |
| VCA   | Video Content Analysis                         |
| VLAN  | Virtual Local Area Network                     |
| VM    | Virtual Machine                                |
| VMD   | Variable Message Display                       |
| VMS   | Video Management System / Software             |
| VPN   | Virtual Private Network                        |
| WAN   | Wide Area Network                              |
| WDR   | Wide Dynamic Range                             |
| Wi-Fi | Wireless Fidelity                              |

## DEFINITIONS

| Term                            | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Agreement / Contract</b>     | The Agreement entered between Authority and the Selected Bidder (including all attachments, schedules, annexure thereto and all documents incorporated by reference therein and all amendments, corrigendum /corrigenda, changes thereto)                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Authority</b>                | The use of term Authority in the RFP means “Ujjain Smart City Limited” or any Government entity for the purpose of this project.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Bidder</b>                   | The use of the term “Bidder” in the RFP means the Single Service Provider / firm who participates in the bidding process, as defined in para 2.3 of the RFP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Bid / Proposal</b>           | Offer by the Bidder to fulfil the requirement of the Client/Authority under the RFP/Contract for an agreed price. It shall be a comprehensive technical and commercial response to the RFP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Breach</b>                   | A breach by Bidder of any of its obligations under this RFP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Client</b>                   | Refers to Ujjain Smart City Limited                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Confidential Information</b> | All information including Departmental data (whether in written, oral, electronic or other Format) which relates to the technical, financial and business affairs, dealers, suppliers, products, developments, operations, processes, data, trade secrets, design rights, know-how, plans, budgets and personnel of each department and its affiliates which is disclosed to or otherwise learned by the other Party in the course of or in connection with this RFP (including without limitation such information received during negotiations, location visits and meetings in connection with this RFP);                                                                    |
| <b>Control</b>                  | In relation to any business entity, the power of a person to secure <ul style="list-style-type: none"> <li>a) by means of the holding of shares or the possession of voting power in or in relation to that or any other business entity, or</li> <li>b) by virtue of any powers conferred by the articles of association or other document regulating that or any other business entity, that the affairs of the first mentioned business entity are conducted in accordance with that person’s wishes and in relation to a partnership, means the right to a share of more than one half of the assets, or of more than one half of the income, of the partnership</li> </ul> |
| <b>Critical Event Days</b>      | Major Snan dates and any dates notified by the Authority requiring enhanced operational readiness and zero-defect service delivery.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Deliverables</b>             | Products, infrastructure and services agreed to be delivered by the Bidder in pursuance of the agreement as defined more elaborately in the RFP Implementation and the Maintenance phases and includes all documents related to the user manual, technical manual, design, process and operating manuals, service mechanisms, policies and guidelines, inter alia payment and/or process related etc., source code and all its modifications;                                                                                                                                                                                                                                   |
| <b>Procurement Portal</b>       | Means the Govt. Online tendering system of the Authority<br><a href="https://mptenders.gov.in/">https://mptenders.gov.in/</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

|                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Intellectual Property Rights</b>        | Intellectual Property Rights include patents, copyright, industrial design rights, trademarks, plants, variety, rights, trade dress, geographical indications                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Month</b>                               | The Month shall mean calendar month & Week shall mean calendar week                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Operations and Maintenance</b>          | Operations and Maintenance services for the software, hardware and other IT and Non-IT infrastructure installed as part of the project after Go-Live and for a period of <b>5 years</b> for permanent infrastructure and <b>9 months</b> for rental infrastructure from the date of Go-Live. The start date of warranty / defect liability period of the product supplied under the project i.e. hardware, software, IT/Non-IT etc., will be from the Go-Live date only.                                                                                 |
| <b>Parties</b>                             | Authority and Bidder for the purposes of this RFP and “ <b>Party</b> ” shall be interpreted accordingly.                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Performance Bank Guarantee</b>          | Unconditional guarantee provided by the Bidder from a Nationalized / Scheduled Commercial Bank in favour of the Authority for 5%of the Total Project Cost.                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Permanent Infrastructure</b>            | Infrastructure/assets procured under CAPEX mode and retained by USCL after completion of Simhashta operations including associated 60 months O&M.                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Project Implementation</b>              | Project Implementation as per the testing standards and acceptance criteria prescribed by Authority or its nominated agencies;                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Request for Proposal / RFP Document</b> | Written solicitation that conveys to the Bidder, requirements for products/ services that the Authority intends to buy and implement                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Service Level</b>                       | The level of service and other performance criteria which will apply to the Services delivered by the IA;                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>SLA</b>                                 | Performance and Maintenance SLA executed as part of Master Service Agreement, as specified in Volume III                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Software</b>                            | Software designed, developed / customized, tested and deployed by the Bidder for the purposes of the Project and includes the source code (in case of Bespoke development) along with associated documentation, which is the work product of the development efforts involved in the Project and the improvements and enhancements affected during the term of the Project, but does not include the third party software products (including the COTS products used for the product), proprietary software components and tools deployed by the Bidder; |
| <b>Successful Bidder</b>                   | The bidder who is qualified & successful in the bidding process and is given the award of Contract and will be referred to as <b>System Integrator (SI)</b> or Implementing Agency (IA)                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Temporary / Rental Infrastructure</b>   | Event-specific infrastructure deployed temporarily for Simhashta operations under rental/service model including deployment, operation, maintenance and dismantling obligations.                                                                                                                                                                                                                                                                                                                                                                         |

## FACT SHEET

| SNo | Particulars                                                                | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |           |
|-----|----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| 1   | Name of Assignment                                                         | Request for Proposal for Selection of System Integrator (SI) for Establishment and O&M of Integrated Command & Control Centre (ICCC) for Simhastha Kumbh Mela 2028                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |           |
| 2   | Cost of RFP Document / Bid submission Fee                                  | Rs 50,000/- plus GST                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |           |
| 3   | Earnest Money Deposit (EMD) / Bid Security                                 | Rs 50,00,000/- (Rs. Fifty Lakhs Only)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |           |
| 4   | Probable Amount of Contract                                                | Not applicable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |           |
| 5   | Purchase of RFP Date                                                       | 20/05/2026                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |           |
| 6   | Pre-bid Meeting                                                            | 01/06/2026 Time 15:00 hrs. at Simhastha Mela Office, Kothi Road, Ujjain                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |           |
| 7   | Purchase of RFP End Date                                                   | 22/06/2026 up to 17:00 hrs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |           |
| 8   | Financial and Technical Bid Submission End Date (Online)                   | 22/06/2026 up to 17:00 hrs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |           |
| 9   | Technical Bid Submission End Date (Physical Only)                          | Not Applicable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |           |
| 10  | Technical Bid opening                                                      | 23/06/2026after 17:00 hrs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |           |
| 11  | Date, Time and Venue for Technical Presentation and Proof of Concept (PoC) | Shall be notified to the eligible bidders                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |           |
| 12  | Financial Bid opening                                                      | Shall be notified to the technically qualified bidders                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |           |
| 13  | Completion Period                                                          | Component                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Timeline  |
|     |                                                                            | Survey, Design & Detailed Engineering                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 2 Months  |
|     |                                                                            | Procurement & Deployment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 6 Months  |
|     |                                                                            | Integration, Testing & Simulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 3 Months  |
|     |                                                                            | Trial Runs & Go-Live                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1 Month   |
|     |                                                                            | Rental Infra O&M                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 9 Months  |
|     |                                                                            | Permanent Infra O&M                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 60 Months |
| 14  | Validity period of Bids                                                    | 180 Days after the Last date of Submission                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |           |
| 15  | Mode of selection of SI                                                    | Open Tender through e-procurement.<br>Selection shall be carried out through “Quality cum Least Cost Selection (QCLS)” methodology.<br>The Technical Proposals of bidders shall first be evaluated as per the Technical Evaluation Criteria specified in the RFP.<br>Bidders securing minimum 70% marks in Technical Evaluation shall be declared “Technically Qualified”.<br>Financial Bids of only such Technically Qualified Bidders shall be opened.<br>The bidder quoting the Lowest Financial Bid (L1) among the Technically Qualified Bidders shall be considered for award of Contract, subject to fulfilment of all RFP requirements. |           |



| SNo                                                                                                                                                                                                                                                                                                         | Particulars                                           | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 16                                                                                                                                                                                                                                                                                                          | Performance Bank Guarantee                            | Three (3) Percent of Total Contract Amount                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 17                                                                                                                                                                                                                                                                                                          | For any enquiries and clarifications, please contact: | Executive Director<br>Ujjain Smart City Limited<br>Email: <a href="mailto:ujjainsmartcity@mpurban.gov.in">ujjainsmartcity@mpurban.gov.in</a><br>Contact Number: +91 734 2525856                                                                                                                                                                                                                                                                                                                                                                                                                |
| 18                                                                                                                                                                                                                                                                                                          | Currency                                              | Currency in which the Bidders may quote the price and will receive payment is Indian Rupees only.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 19                                                                                                                                                                                                                                                                                                          | Deployment Model                                      | Hybrid Model comprising:<br>(i) Permanent CAPEX Infrastructure with 60 months O&M; and<br>Temporary/ Rental Infrastructure with approximately 9 months deployment & O&M.                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 20                                                                                                                                                                                                                                                                                                          | Project Timeline                                      | <b>Phase 1:</b> Mobilization, Survey, Design & Solution Document, OEMs Approvals – 2 months<br><b>Phase 2:</b> Procurement and Installation – 6 months<br>(i) ICCC Interiors and Furnishing, Workstations, Consoles, Video-wall setup, etc.<br>(ii) Network and power infrastructure<br>(iii) Camera and analytics deployment<br>(iv) ICCC setup<br><b>Phase 3:</b> Integration, Testing & Commissioning – 3 months<br><b>Phase 4:</b> Trial Runs and Go-live – 1 months<br><b>Phase 5:</b><br>(i) O&M of Rental Infrastructure – 9 months<br>(ii) O&M of Permanent Infrastructure – 60 months |
| 21                                                                                                                                                                                                                                                                                                          | Defect Liability Period                               | <b>36 months</b> from Go-Live for all permanent infrastructure unless covered under OEM warranty/ O&M obligations.                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 22                                                                                                                                                                                                                                                                                                          | Contractual Safeguards                                | <ul style="list-style-type: none"> <li>LD for delays: 0.50% per week (max 10%)</li> <li>Go-Live penalties</li> <li>Comprehensive insurance and warranty obligations</li> <li>Strict information security &amp; confidentiality compliance</li> <li>Indemnity for cyber-breaches, service failures</li> <li>Full IPR ownership with Ujjain Smart City Limited (USCL)</li> <li>Structured exit and transition plan</li> <li>Change Request mechanism with <math>\pm 25\%</math> variation</li> </ul>                                                                                             |
| <p><i>Note: In case of any mismatch in key dates, key dates showing on e-portal shall be final. For more details, please refer to e-procurement website: <a href="http://www.mptenders.gov.in">www.mptenders.gov.in</a>. Corrigendum or amendments, if any, shall be uploaded on this website only.</i></p> |                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

## SECTION 1 – INSTRUCTIONS TO BIDDERS

### 1. INSTRUCTIONS TO THE BIDDER

#### A. General Instructions

##### 1.1 Instructions for Online Bid Submission

- a) Instructions to the Bidders to submit the bids online through the Public Procurement Portal for e-Procurement at <https://mptenders.gov.in/>
- b) Possession of valid Digital Signature Certificate (DSC) and enrolment / registration of the Bidders on the e-Procurement/e-tender portal are prerequisites for e-tendering.
- c) Bidder should register for the enrolment in the e-Procurement site using the “Online Bidder Enrolment” option available on the home page. Portal enrolment is generally free of charge. During enrolment / registration, the bidders should provide only valid and true information including valid email id. All the correspondence shall be made directly with the Bidders through email id as registered.
- d) Bidder needs to login to the site through their user ID / password chosen during enrolment / registration.
- e) The Digital Signature Certificate (Class II or Class III Certificates with signing key usage) issued by SIFY/TCS/nCode/eMudra or any other Certifying Authority recognized by Controller of Certifying Authorities (CCA) India on eToken/ Ujjain Smartcard, should be registered
- f) The registered DSC only should be used by the Bidder in the transactions and should ensure safety of the same
- g) Bidder may go through the tenders published on the site and download the tender documents/schedules for the tenders
- h) After downloading / getting the tender document/schedules, the Bidder should go through them carefully and then submit the documents as required, otherwise the bid will be rejected
- i) Any clarifications may be sought online through the tender site, through the contact details or during pre-bid meetings if any. Bidder should take into account the corrigendum if any is published before submitting the bids online.
- j) Bidder may log in to the site through the secured login by the user id/ password chosen during enrolment/registration and then by submitting the password of the e-Token/ Ujjain Smart Card to access DSC
- k) Bidders may select the tender which they are interested in by using the search option and then move it to the ‘my tenders’ folder.
  - From my tender folder, the Bidder may select the tender to view all the details uploaded there
  - It shall be deemed that the bidder has read and understood all the terms and conditions before submitting the offer. Bidder should go through the tender schedules carefully and upload the documents as asked; otherwise, the incomplete bid shall stand rejected.
  - Bidder, in advance, should prepare the bid documents to be submitted as indicated in the tender

document/schedule and ordinarily it shall be in [PDF/xls/rar/jpg/dwf] formats. If there is more than one document, all may be clubbed together and provided in the requested format. Bidders Bid documents may be scanned with 100 dpi with black and white option. It is advisable that each document to be uploaded online for the tenders should be less than [2 MB]. If any document is more than [2MB], it can be reduced through zip/rar and the same, if permitted, may be uploaded. The total available size for uploading the documents will be as per the size limited by e-procurement portal.

- Bidder should submit the Bid Document Fee/ Bid Security/EMD as specified in the tender. The hard copy of the document should be posted/couriered/given in person to the Tender Inviting Authority, within bid submission due date and time as indicated in the tender. Scanned copy of the instrument should be uploaded as part of the offer.
- While submitting the bids online, the Bidder shall read the terms and conditions and may accept the same to proceed further to submit the bid packets.
- The Bidder has to select the payment option as offline to pay the Bid Document Fee/ Bid Security/EMD as applicable and enter details of the instruments.
- The details of the DD/any other accepted instrument, physically delivered, should tally with the details available in the scanned copy and the data entered during bid submission time, otherwise submitted bids shall not be acceptable or liable for rejection.
- The Bidder has to digitally sign and upload the required bid documents one by one as indicated. Very act of using DSC for downloading the bids and uploading their offers shall be deemed to be a confirmation that the Bidder has read, understood and agreed with all clauses of the Bid Document including General conditions of contract without any exception.
- The Bidder has to upload the relevant files required as indicated in the cover content.
- If the Price-bid/BOQ template is provided in a spreadsheet file (for e.g. BoQ.xls), the rates offered should be entered in the allotted space only and uploaded after filling the relevant columns. The Price-bid/BOQ template shall not be modified / replaced by the Bidder; else the bid submitted is liable to be rejected for the tender.
- The Bidders are advised to submit the bids through an online e-tendering system to the Tender Inviting Authority (TIA) well before the bid submission due date and time (as per Server System Clock). The TIA shall not be held responsible for any delay or the difficulties faced during the submission of bids online by the Bidders.
- After the bid submission, the acknowledgement number indicated by the system should be printed by the Bidder and kept as a record of evidence for online submission of bids for the particular tender.
- The time settings fixed in the server side and displayed at the top of the tender site, shall remain valid for all actions of requesting, bid submission, bid opening etc., in the e-Tender system. The Bidder should follow such time during bid submission.
- All the data being entered by the Bidder would be encrypted using Public Key Infrastructure (PKI) encryption techniques to ensure the secrecy of the data. The data entered is not retrievable by unauthorized persons during the bid submission and until the time of bid opening by any person

- Any Bid Document that is uploaded on the server is subjected to symmetric encryption using a system generated symmetric key. Further this key is subjected to asymmetric encryption using buyers/bid openers' public keys. Overall, the uploaded Bid Documents become readable only after the tender opening by authorized bid openers.
- The confidentiality of the bids is maintained with the use of Secure Socket Layer (SSL) 128-bit encryption technology. Data storage encryption of sensitive fields is done.
- The Bidder should logout of the tendering system using the normal logout option available at the top right-hand corner and not by selecting the (X) exit option in the browser.
- For any queries regarding e-Tendering process, the Bidders may contact at address as provided in the Bid Document. For any further queries, the Bidders are advised to send an email to [ujjainsmartcity@mpurban.gov.in](mailto:ujjainsmartcity@mpurban.gov.in)

## 1.2 General Instructions

- a) While every effort has been made to provide comprehensive and accurate background information, requirements and envisaged solution(s) specifications, Bidders must form their own conclusions about the solution(s) needed to meet the Authority's requirements. Bidders and recipients of this RFP may wish to consult their own legal advisers in relation to this RFP.
- b) All information supplied by Bidders as part of their bids in response to this RFP, may be treated as contractually binding on the Bidders, on successful award of the project by the Authority on the basis of this RFP.
- c) No commitment of any kind, contractual or otherwise shall exist unless and until a formal written contract has been executed by or on behalf of Authority. Any notification of preferred bidder status by Authority shall not give rise to any enforceable rights by the Bidder. Authority may cancel this public procurement at any time prior to a formal written contract being executed by or on behalf of Authority.
- d) Bids shall be received by the Authority on the e-Procurement portal <https://mptenders.gov.in/> before the time and date specified in the schedule of the tender notice. In the event of the specified date for the submission of tender being declared a public holiday by the Government of respective state, the offers will be received up to the appointed time on the next working day. The Authority may, at its discretion, extend this deadline for submission of offers by issuing corrigendum and uploading the same on e-Procurement portal.
- e) Telex, cable, or facsimile offers will be rejected.

## 1.3 Eligible Bidders

### 1.3.1 Bidding Entity

- a) The Bidder for pre-qualification may be a single entity or a group of entities (the "Consortium"), coming together to fulfil the deliverables as per the scope of the Bid. However, no Bidder applying individually or as a member of a Consortium, as the case may be, can be a member of another Bidder. The term Bidder used herein would apply to both a single entity and a Consortium.
- b) A Bidder may be a natural person, private entity, [government-owned entity] or any combination of them with a formal intent to enter into an agreement or under an existing agreement to form a Consortium. A Consortium shall be eligible for consideration subject to the conditions set out in Clause no. 2.3.2 below.

- c) A Bidder shall not have a conflict of interest (the “Conflict of Interest”) that affects the Bidding Process. Any Bidder found to have a Conflict of Interest shall be disqualified.

### **1.3.2 Consortium of Firms**

- a) In case a bid is submitted by a consortium of two firms / companies (No. of members shall not be more than 2 including lead member) as consortium members, the members of consortium shall meet the following requirements:
  - i. The Lead Member of the Consortium shall meet individually the financial requirement criteria given at Clause no. 3.5, section (iii)
  - ii. In case of a Consortium, the requirements under technical eligibility criteria Clause no. 3.5, section (iv), have to be met individually for each of the scope by one of the consortium members in its entirety.
- b) In case of Consortium, the following conditions shall also apply: A Consortium shall be considered Bidder provided that one of the members of the consortium shall be nominated as being in-charge (the “Lead Member”) and this authorization shall be evidenced by submitting a power of attorney signed by legally authorized signatories of all the members. A Bidder shall not have a conflict of interest (the “Conflict of Interest”) that affects the Bidding Process. Any Bidder found to have a Conflict of Interest shall be disqualified.
- c) The Lead Consortium Member shall submit the Bid and shall be liable towards fulfilling the obligations in this RFP.
- d) The Lead Consortium Member and all consortium members shall have a valid Goods and Services Tax Registration Number, Provident Fund (PF) Code and Permanent Account Number (PAN) for the Republic of India.
- e) The Lead Consortium Member shall designate and authorize one person to represent the Consortium in its dealings with the Authority through a Power of Attorney as per Section 5.4 to perform all tasks including, but not limited to, providing information, responding to inquiries, signing of Bid on behalf of the Consortiums, etc.
- f) Each member of the Consortium and shall be registered under the Companies Act 1956/2013 with Registrar of Companies/ LLP firm/ Partnership firm under Partnership Act of 1932 or a sole Proprietorship firm registered under Companies Act 2013 and operations in India.
- g) Every Consortium Member shall provide consent to the Lead Member and make itself aware of all the proceedings of the bidding process and Project implementation through legally enforceable consortium agreement (the “Joint Bidding Agreement), power of attorneys, legal undertakings, etc. entered amongst all members of that Bidding Consortium. In the absence of duly executed formats, the Bid shall not be considered for evaluation and will be rejected.
- h) The Bidder and each member of consortium should not be blacklisted / barred by any Govt. Organization or Regulatory Agencies or Govt. Undertaking. Bidder should submit a self- undertaking signed by its Authorized Signatories for the same as per Annexure 1.4.
- i) The Lead Member shall submit the Bid after legitimately paying the Bid Document fees for the RFP, and submission of the EMD/Bid Security as per the various terms, schedules and formats prescribed as per Annexure 4 and Annexure 5 of the RFP.

- j) The bid, and in case of successful bid the specified Form of Agreement, shall be signed so as to be legally binding on all consortium members as per Annexure 6 of this RFP.
- k) The Lead Member shall be authorized to incur liabilities and receive instructions for and on behalf of any and all members of the Consortium, and the entire execution of the Contract shall be done with the Lead Member and payment under the contract shall be received by the Lead Member on behalf of the Consortium as per power conferred to him in the Power of Attorney.
- l) The Lead Member shall be liable for the entire contract in accordance with the contract terms, while other Consortium Members shall be liable severally for their portion of Work. The statement to this effect shall be provided along with RFP submissions including the Bid Form and Contract (in case of successful bid).
- m) The list of Consortium Members needs to be declared in the bid which cannot be changed by the bidder later. Any change in the Consortium member will need to be approved by the Authority. However, Authority reserves the right to reject the Bid in case of change in the constitution of the consortium after the submission of Bid and before the execution of the Agreement.
- n) The role and responsibility of any member must be commensurate with the technical/financial capabilities that such member is contributing towards meeting the qualification criteria. Each consortium member is liable to contribute resources in terms of knowledge, skills, and trained manpower commensurate with its role and responsibilities during the Contract Period.
- o) The Consortium Agreement must also state that the period of the Agreement would coincide with the Contract period. Consortium must continue to be in existence during the period of the contract and that any change will be subject to approval of the Authority only.
- p) Any Dispute arising during Contract Period between the Consortium Members shall be resolved amicably without adversely impacting Project Implementation and Operation. If in Authority's opinion, dispute between Consortium members adversely impacts implementation and operation of the Project, then Authority may in its sole discretion in the interest of the Project, (a) Terminate the Contract after due process and/or (b) Provide a binding solution.
- q) In case Authority intends to proceed for termination on account of IA's Event of Defect and / or unresolved disputes between the Consortium Members, all the Consortium Members shall be jointly and severally liable for Implementation, Operation and Maintenance of project at Agreed prices and payment terms specified in this RFP till Authority or any new agency appointed by it takes over the Project.

### **1.3.3 Constitution of Consortium**

- a) A group of Persons/entities may form a Consortium for submitting a bid under the present RFP. The Consortium shall be headed and represented through a Lead Member who shall act as the interface between the Consortium and the Authority. Unless the Authority deems fit and the Agreement requires otherwise Lead Member shall be solely and absolutely accountable to the Authority for the performance of all obligations under the Agreement.
- b) The Consortium Members have agreed that Lead Member is the main point of contact between the Consortium Members and the Authority, and it shall be primarily responsible for the discharge and administration of all the obligations contained herein. The Authority unless it deems necessary shall deal only with the Lead Member. However, the Lead Member and consortium members shall be jointly and

severally liable to the Authority. Notwithstanding the foregoing, the Lead Member would have the sole responsibility of ensuring the delivery of products and services mentioned in all volumes of this RFP and each consortium member will only be responsible/liable for their scope of work.

- c) Without prejudice to the obligation of the Consortium Members to adhere to and comply with the terms of the Agreement, the Consortium Members have executed and submitted a power of attorney in favour of the Lead Member authorizing him to act for and on behalf of such members of the Consortium and to do all acts as may be necessary for fulfilment of obligations under the Agreement.
- d) No agreement/contract executed within the consortium members be amended, modified and/or terminated without the prior written consent of the Authority. An executed copy of each of such agreements/contracts shall, immediately upon execution be submitted by IA to the Authority.
- e) Where, during the term of the Agreement, Lead Member terminates any contract/arrangement or agreement relating to the performance of Services, Lead Member shall be responsible and liable for any consequences resulting from such termination. Lead Member shall in such case ensure the smooth continuation of Services by providing a suitable replacement to the satisfaction of the Authority at no additional charge and at the earliest opportunity.

#### 1.4 Proposal Preparation Cost

- a) The Bidder is responsible for all costs incurred in connection with participation in this process, including, but not limited to, costs incurred in conduct of informative and other diligence activities, participation in meetings/discussions/presentations, preparation of proposal, in providing any additional information required by Authority, to facilitate the evaluation process, and in negotiating a definitive agreement or all such activities related to the bid process. The Authority will in no case be responsible or liable for those costs, regardless of the conduct or outcome of the bidding process.
- b) This Bid Document does not commit the Authority to award a contract or to engage in negotiations. Further, no reimbursable cost may be incurred in anticipation of award. All materials submitted by the Bidder shall become the property of Authority and may be returned at its sole discretion.

#### 1.5 Bid Queries

- a) prospective Bidder requiring any clarification on the RFP Document may submit his queries, via email, to the following e-mail id on or before prescribed date, Email Id for submission of queries: (Email ID: [ujjainsmartcity@mpurban.gov.in](mailto:ujjainsmartcity@mpurban.gov.in)).
- b) The queries should necessarily be submitted in the following format:

| Request for Clarification                               |                                                |                                                |                                                                 |
|---------------------------------------------------------|------------------------------------------------|------------------------------------------------|-----------------------------------------------------------------|
| Name and Address of the Organization submitting request |                                                | Name and Position of Person submitting request | Contact Details of the Organization / Authorized Representative |
|                                                         |                                                |                                                | Tel/Mobile:<br>Email:                                           |
| S No                                                    | RFP Document Reference (Section No., Page No.) | Content of the RFP requiring clarification     | Clarification Sought                                            |
| 1                                                       |                                                |                                                |                                                                 |

|   |  |  |  |
|---|--|--|--|
| 2 |  |  |  |
|---|--|--|--|

- c) Queries submitted post the above-mentioned deadline, or which do not adhere to the above-mentioned format may not be responded to. All the responses to the queries (clarifications / corrigendum) shall be made available on the website: <https://mptenders.gov.in/>
- d) At any time before the deadline for submission of bids, the Authority may, for any reason, whether at its own initiative or in response to a clarification requested by a prospective Bidder, modify the RFP Document by an addendum/ corrigendum.
- e) The Bidders are advised to visit <https://mptenders.gov.in/> on regular basis for checking necessary updates. Authority also reserves the rights to amend the dates mentioned in this RFP for bid process.
- f) To afford prospective Bidders reasonable time in which to take the amendment into account in preparing their bids, the Authority may, at its discretion, extend the last date for the receipt of Bids

#### 1.6 Compliant Bids / Completeness of Response

- a) Bidders are advised to study all instructions, forms, terms, requirements, and other information in the RFP documents carefully. Submission of the bid shall be deemed to have been done after careful study and examination of the RFP document with full understanding of its implications.
- b) Failure to comply with the requirements of this RFP may render the bid non-compliant and the Bid may be rejected. Bidders must:
  - i. Include all documentation specified in this RFP, in the bid.
  - ii. Follow the format of this RFP while developing the bid and respond to each element in the order as set out in this RFP.
  - iii. Comply with all requirements as set out within this RFP.

#### 1.7 Right to Amendment of the Project Scope

- a) Authority retains the right to amend the scope of work or amend the program for service delivery at any time and without assigning any reason. Authority makes no commitments, express or implied, that the full scope of work as described in this RFP will be commissioned.
- b) The bidder's technical and commercial proposals received in this process may result in Authority selecting to engage with the bidders in further discussions, seeking clarifications and negotiations toward execution of an agreement including finalization of the scope elements. The commencement of such negotiations does not, however, signify a commitment by the Authority to execute a contract or to continue negotiations. Authority may terminate negotiations at any time without assigning any reason.

#### 1.8 Authority Rights to Terminate the Selection Process

- a) Authority may terminate the RFP process at any time and without assigning any reason. Authority makes no commitments, express or implied, that this process will result in a business transaction with anyone.
- b) This RFP does not constitute an offer by Authority.
- c) The bidder's participation in this process may result in Authority selecting the bidder to engage in further discussions and negotiations toward execution of an agreement. The commencement of



such negotiations does not, however, signify a commitment by the Authority to execute an agreement or to continue negotiations. Authority may terminate negotiations at any time without assigning any reason.

#### 1.9 Right to Accept / Reject any Proposal

- a) Notwithstanding anything contained in this RFP, the Authority reserves the right to accept or reject any Proposal and to annul the Selection Process and reject all Proposals, at any time without any liability or any obligation for such acceptance, rejection, or annulment, and without assigning any reasons, therefore.
- b) Besides other conditions and terms highlighted in the RFP Document, bids may be rejected under following circumstances:

##### i. *General Rejection Criteria*

- Conditional Bids.
- If the information provided by the Bidder is found to be incorrect / misleading / fraudulent/incomplete at any stage / time during the Tendering Process.
- Any effort on the part of a Bidder to influence the bid evaluation, bid comparison or contract award decisions.
- Bids received after the prescribed time & date for receipt of bids.
- Bids without signature of person (s) duly authorized on required pages of the bid.
- Bids without power of attorney/ board resolution or its certified true copy.

##### ii. *Pre-Qualification Rejection Criteria*

- Bidders not complying with the Eligibility Criteria given in this RFP.
- Revelation of prices in any form or by any reason before opening the Commercial Bid.
- Failure to furnish all information required by the RFP Document or submission of a Bid not substantially responsive to the RFP Document in every respect.

##### iii. *Technical Rejection Criteria*

- Technical Bid containing commercial details.
- Revelation of Prices in any form or by any reason before opening the Commercial Bid.
- Failure to furnish all information required by the RFP Document or submission of a Bid not substantially responsive to the RFP Document in every respect.
- Bidders not quoting for the complete scope of work as indicated in the RFP Documents, addendum /corrigendum (if any) and any subsequent information given to the Bidder.
- Bidders not complying with the Technical and General Terms and conditions as

stated in the RFP Documents.

- The Bidder not confirming unconditional acceptance of full responsibility of providing services in accordance with the scope of work and Service Level Agreements of this RFP.

#### **iv. Commercial Rejection Criteria**

- Incomplete price Bid.
  - Price Bids that do not conform to the RFP's price bid format.
  - Total price quoted by the Bidder does not include all statutory taxes and levies applicable.
  - If there is an arithmetic discrepancy in the commercial Bid calculations the Technical Committee shall rectify the same. If the Bidder does not accept the correction of the errors, its Bid may be rejected.
- c) Misrepresentation/ improper response by the Bidder may lead to the disqualification. If such disqualification / rejection occurs after the Proposals have been opened and the L1 Bidder gets disqualified / rejected, then Authority reserves the right to consider the next best ranked Bidder or take any other measure as may be deemed fit in the sole discretion of Authority, including annulment of the Selection Process.

#### **1.10 Bidder to Inform**

The Bidder shall be deemed to have carefully examined the Terms & Conditions, Scope, Service Levels, Specifications, and Schedules of this RFP. If bidder has any doubts/clarifications as to the meaning of any portion of the Conditions or the specifications, he shall, before the last date and time for Submission of Pre-Bid Queries and submit them to Authority in writing in order that such doubt may be removed, or clarifications are provided.

#### **1.11 Bid Formats**

Attached separately

#### **1.12 Language of the Bid**

The bids prepared by the Bidder and all subsequent correspondence and documents relating to the bids exchanged by the Bidder and Authority shall be written in English language. Any printed literature furnished by the Bidder, written in another language, shall be accompanied by an accurate English translation, in which case, for purposes of interpretation of the Bid, the English translation shall govern.

#### **1.13 Hand-written Documents, Erasures or Alterations**

The offers containing erasures or alterations will not be considered. There should be no hand- written material, corrections, or alterations in the offer. Filling up the information using terms such as "OK", "noted", "as given in brochure/manual" is not acceptable and may lead to the disqualification of the Bid.

#### **1.14 Earnest Money Deposit (EMD) / Bid Security**

- (i) The Bidder shall furnish, as part of the Bid, Earnest Money Deposit (EMD), in the amount specified in the Bid Data Sheet.

- (ii) EMD/ Bid Security shall be submitted only online using options available in the tender portal within the specified time limit. Bidders are advised to process it well in advance. No claim shall be entertained due to delay in online transactions via payment gateway/banking portal."
- (iii) Bid not accompanied by EMD shall be liable for rejection as non-responsive.
- (iv) EMD of all bidders except the successful bidder will be returned within ten working days of the decision on the bid.
- (v) EMD of the successful Bidder will be discharged when the Bidder has signed the Agreement after furnishing the required Performance security.
- (vi) Failure to sign the contract by the selected bidder, within the specified period, for whatsoever reason, shall result in forfeiture of the earnest money.

The Selected Bidder's EMD will be returned, without any interest, upon the Selected Bidder signing the Agreement and furnishing the Security Deposit / Performance Guarantee in accordance with the provision thereof.

On event of the occurrence of the following, the EMD may be forfeited if:

- a) A Bidder withdraws their bid or increases their quoted prices during the period of bid validity or its extended period, if any; or
- b) In the case of a Successful Bidder, if the Bidder fails to sign the Contract or to furnish Performance Bank Guarantee within specified time
- c) During the bid process, if a Bidder indulges in any such deliberate act as would jeopardize or unnecessarily delay the process of bid evaluation and finalization.
- d) During the bid process, if any information is found wrong / manipulated /fraudulent information in the bid.

The format for submitting EMD is as per Annexure 4.

#### 1.15 Bid Prices

The Bidder shall indicate in the proforma prescribed, the unit rates and total Bid Prices for the product and services, it proposes to provide under this RFP. Prices should be shown separately for each item as detailed in this document.

The Bidder shall prepare the Bid based on details provided in the RFP document. It must be clearly understood that the Scope of Work is intended to give the Bidder an idea about the order and magnitude of the work and is not in any way exhaustive and guaranteed by the Authority. The Bidder shall carry out all the tasks in accordance with the requirement of the RFP document and with due diligence. It shall be the responsibility of the Bidder to fully meet all the requirements and objectives of the RFP. If during the course of execution of the project any minor revisions to the work requirements like technical specifications, equipment sizing, etc. are to be made to meet the goals of the Project; such changes shall be carried out within the proposed price. If any deviation has a major impact on the Project Cost, the Authority shall take appropriate decisions and such decisions would be binding on the Bidder.

### 1.16 Firm Prices

Prices quoted in the Bid must be firm and shall not be subject to any modifications, on any account whatsoever. The Bid Prices shall be indicated in Indian Rupees (INR) only.

The Price Bid should clearly indicate the price quoted without any ambiguity whatsoever and should include all applicable taxes, duties, fees, levies, and other charges as may be applicable in relation to the activities proposed to be carried out. Should there be a change in applicable taxes, the actual taxes on the date of billing would prevail.

Prices in any form or by any reason before opening the Price Bid should not be revealed, failing which the offer shall be liable for rejection. If price change is inevitable due to any factor external to the Bidders, the Bidders may be given a chance to submit revised Bids in a separate sealed cover. Decisions of the Authority shall be final in this regard.

### 1.17 Amendment of the RFP Document

At any time prior to the submission of bids, Authority for any reason whatsoever, may modify any element of the RFP Document by issuing an addendum/corrigendum. For the sake of interpretation, the content of any corrigenda issued by the Authority shall be read as a part of the original RFP Document. In each instance where provisions of the Corrigenda contradict or are inconsistent/ inapplicable with the provisions of the RFP, the provisions of the Corrigenda shall prevail and govern, and the contradicted or inconsistent/inapplicable provisions of the RFP shall be deemed amended accordingly.

The Authority may in its sole discretion consider extension of deadlines for submission of the bids, to allow prospective bidders reasonable time to take the amendment into account while preparing their bids. All communications with regards to the clarifications / corrigendum shall be uploaded on the website <https://mptenders.gov.in/>

It shall be the responsibility of the Bidder(s) to check the Authority's website and e-procurement portal from time to time for any amendment in the RFP document.

### 1.18 Inspection of Site and Sufficiency of RFP

Bidder is expected to work out their own rates based on the detailed description of scope of work, the specifications, SLA conditions, etc. and should judiciously arrive at the bidding price. The Bidder shall be deemed to have satisfied itself before Bid submission as to correctness and sufficiency of its bid. The rates quoted by the bidder shall cover all its obligations under the RFP necessary for proper execution of the project including O&M.

If necessary, before submitting its Bid the Bidder should inspect and examine various sites and its surroundings and shall satisfy itself about form and nature of the Sites (including equipment/asset locations), means of access to the Sites, and in general, obtain all necessary information which may influence or affect Project implementation and operationalization. No extra charges consequent on any misunderstanding or otherwise shall be allowed.

The Bidder shall be deemed to have conducted independent site surveys, assessed terrain, crowd conditions, utility constraints, deployment complexity, temporary infrastructure requirements, operational risks, and

local conditions before submission of Bid.

During major snan days, the deployed infrastructure and manpower shall function under “Zero Critical Failure” operational mode.

Bidder shall ensure seamless interoperability between surveillance systems, AI analytics platform, GIS platform, and Digital Twin platform through open APIs and standardized integration architecture.

Authority may require live demonstration, Proof of Concept (PoC), simulation demonstration, AI analytics validation, or Digital Twin capability demonstration at any stage during evaluation.

#### 1.19 Deviations and Exclusions

Bids shall be submitted strictly in accordance with the requirements and terms & conditions of the RFP (No Deviation Certificate). The bids with deviation(s) are liable for rejection.

#### 1.20 Total Responsibility

The SI shall bear complete end-to-end responsibility for design, integration, interoperability, performance, uptime, cybersecurity, scalability, operational continuity, and successful functioning of the ICCC ecosystem irrespective of whether individual components are manufactured/supplied by different OEMs or partners.

No claim, delay, or failure on the part of any OEM/subcontractor shall be accepted as a valid excuse for non-performance. The SI shall remain fully liable for all contractual obligations. Bidder should issue a statement undertaking total responsibility for the defect free operation of the proposed solution.

#### 1.21 Key Personnel

Authority has identified certain key positions and minimum qualifications for each of the positions that should be part of the project team of the Bidder (hereby referred to as “**Key Personnel**”). Details of these key positions are provided.

##### a) *Initial Composition; Full Time Obligation; Continuity of Personnel*

Selected Bidder shall ensure that each member of the Key Personnel devotes substantial working time as per the staffing schedule/ manpower plan to perform the services to which that person has been assigned as per the bid.

Selected Bidder shall not make any changes to the composition of the Key Personnel and not require or request any member of the Key Personnel to cease or reduce his or her involvement in the provision of the Services during the defined term of the engagement unless that person resigns, is terminated for cause, is long-term disabled, is on permitted mandatory leave under Applicable Law or retires.

In any such case, the Authority's prior written consent would be mandatory.

##### b) *Evaluations*

Selected Bidder shall carry out an evaluation of the performance of each member of the Key Personnel in connection with the Services at least once fortnightly. Authority shall be entitled to provide inputs to the Selected Bidder for each such evaluation. Selected Bidder shall promptly provide the results of each evaluation

to the Authority, subject to Applicable Law.

### c) *Replacements*

In case any proposed resource resigns, then the Selected Bidder has to inform the Authority within one week of such resignation.

The Selected Bidder shall promptly initiate a search for a replacement to ensure that the role of any member of the Key Personnel is not vacant at any point in time during the agreement period, subject to reasonable extensions requested by the Selected Bidder to Authority.

Before assigning any replacement member of the Key Personnel to the provision of the Services, the Selected Bidder shall provide Authority with:

- i. A resume, curriculum vitae and any other information about the candidate that is reasonably requested by Authority; and
- ii. An opportunity to interview the candidate.

The Selected Bidder has to provide replacement resource of equal or better qualification and experience as per the requirements of this RFP.

If Authority objects to the appointment, the Selected Bidder shall not assign the individual to that position and shall seek an alternative candidate in accordance with the resource requirements of this RFP.

The Selected Bidder needs to ensure at least 4 weeks of overlap period in such replacements. Authority will not be responsible for any knowledge transition to the replacement resource and any impact/escalation of cost incurred by the Selected Bidder due to resource replacement.

### 1.22 *Inclusion of MSMEs and Emphasis on Make in India in Project Delivery*

Bidders are encouraged to include Micro, Small and Medium Enterprises (MSMEs) in the delivery of the project. Further to promote Make in India initiative of Government of India, procurement guidelines as per Public Procurement (Preference to Make in India), Order 2017, and its subsequent amendments thereof, of Department for Promotion of Industry and Internal Trade (DPIIT) must be strictly complied with. An undertaking in this regard to be submitted by bidder.

### 1.23 *Right to Vary Quantity*

- a) At the time of award of contract, the quantity of goods, works or services originally specified in the bidding documents may be increased. It shall be without any change in the unit prices or other terms and conditions of the Bid and the bidding documents.
- b) If the Authority does not procure any subject matter of procurement or procures less than the quantity specified in the bidding documents due to change in circumstances limited to variation up to 25%, the Bidder shall not be entitled for any claim or compensation except otherwise provided in the bidding document.
- c) Repeat orders for extra items or additional quantities may be placed limited to variation up to 25%, if it is provided in the bidding document, on the rates and conditions given in the contract if the original order was given after inviting open competitive bids. Delivery or completion period may also be proportionally

increased.

- d) During the course of implementation and detailed due diligence, it may be required to vary the quantity and location of the field devices to suit the overall Simhastha Mela 2028 requirements. The Selected Bidder should be required to provision and supply such field devices and the backend resources at the unit rates quoted in the tender response. Such escalations/additions may go up to 25% of the specified BOQ.

#### 1.24 Withdrawal, Substitution and Modification of Bids

- a) A Bidder may withdraw its Bid or re-submit its Bid (technical and/ or financial) as per the instructions/ procedure mentioned at e-Procurement website
- b) Bids withdrawn shall not be opened and processed further.

## SECTION 2 – SELECTION METHODOLOGY

### 2. SELECTION CRITERIA

#### 2.1 Selection Methodology (QUALITY CUM LEAST COST SELECTION)

The selection of System Integrator (SI) shall be carried out through a two-stage evaluation process comprising:

- (i) Technical Evaluation; and
- (ii) Financial Evaluation.

Technical Evaluation shall be conducted first.

Only those bidders securing minimum qualifying marks of 70% in Technical Evaluation shall be considered technically qualified and eligible for opening of Financial Bids.

Financial Bids of only technically qualified bidders shall be opened.

The bidder quoting the Lowest Evaluated Financial Bid (L1) among technically qualified bidders shall be considered for award of Contract.

#### 2.2 Withdrawal, Substitution and Modification of Bids

The Bids shall be opened by Authority in presence of those Bidders or their representatives who may be present at the time of opening.

The representatives of the Bidders are advised to carry the identity card or a letter of authority from the bidder firms to identify that they are bona fide representatives of the bidder firm, for attending the opening of bid.

There will be three bid-opening events under 2-stage bidding process:

- i. Set 1 (RFP Document fee & Bid Security/EMD) and Set 2 (Pre-Qualification bid)
- ii. Set 3 (Technical bid)
- iii. Set 4 (Price bid)

The venue, date, and time for opening the Pre-qualification bid and technical bid are mentioned in the Fact sheet.

The date and time for opening of the price bid would be communicated to the qualified bidders.

Bids received within the prescribed closing date and time will be opened on the e-procurement platform, on the date, time and at the address mentioned in the RFP Document.

- i. Technical bid of only those Bidders shall be opened who meet the Pre-Qualification requirements
- ii. Only bidders securing minimum 70% marks in Technical Evaluation shall qualify for Financial Evaluation.

#### 2.3 Preliminary Examination of Bids

Authority shall examine the bids to determine whether they are complete, whether the documents have been



properly signed and whether the bids are generally in order. Any bids found to be non-responsive for any reason or not meeting any criteria specified in the RFP, shall be rejected by Authority, and shall not be included for further consideration.

Initial Bid scrutiny shall be held, and bids will be treated as non-responsive, if bids are:

- i. Not submitted in format as specified in the RFP document.
- ii. Received without the Letter of Authorization (Power of Attorney).
- iii. Found with suppression of details.
- iv. With incomplete information, subjective, conditional offers and partial offers submitted.
- v. Submitted without the documents requested.
- vi. Non-compliant to any of the clauses mentioned in the RFP.
- vii. With lesser validity period.
- viii. EMD not submitted / lesser EMD validity period .
- ix. If the Bidder gives wrong information in the Bid.
- x. Canvassing in any form in connection with the Bid.
- xi. Bids submitted after due date and time.
- xii. Bids submitted by Print out/Telex/Telegram/Fax/e-mail.
- xiii. Erasure and/or over writing is/are Not permissible
- xiv. Bids not signed by authorized signatory

## 2.4 Clarification on Bids

During the bid evaluation, Authority may, at its discretion, ask the Bidder for any clarification(s) of its bid. The request for clarification and the response shall be in writing, and no change in the price or substance of the bid shall be sought, offered, or permitted.

The Authority may waive any minor infirmity, nonconformity or irregularity in a bid that does not constitute a material deviation, and that does not prejudice or affect the relative position of any Bidder, provided it conforms to all the terms, conditions of the bidding documents without any material deviations, objections, conditionality, or reservations. A material deviation, objection, conditionality, or reservation is one (i) that affects in any substantial way the scope, quality, or performance of the Agreement; (ii) that limits in any substantial way, inconsistent with the bidding documents, Authority's rights or the selected Bidder's obligations under the Agreement; or (iii) whose rectification would unfairly affect the competitive position of other Bidders who are presenting responsive bids.

## SECTION 3 – EVALUATION PROCESS

### 3. EVALUATION PROCESS

Authority shall constitute a Tender Evaluation Committee to evaluate the responses of the Bidders. The Tender Evaluation Committee shall evaluate the responses to the RFP and all supporting documents/documentary evidence. Inability to submit requisite supporting documents/documentary evidence by Bidders may lead to rejection of their bids.

The decision of the Tender Evaluation Committee in the evaluation of bids shall be final. No correspondence will be entertained outside the process of evaluation with the Committee. The Tender Evaluation Committee may ask for meetings or presentations with the Bidders to seek clarifications or confirmations on their bids.

The Tender Evaluation Committee reserves the right to reject any or all bids. Each of the responses shall be evaluated as per the criteria and requirements specified in this RFP.

The steps for evaluation are as follows:

#### 3.1 Stage 1: Pre-Qualification and Technical Evaluation

The evaluation process shall comprise:

- a) Preliminary Scrutiny;
- b) Pre-Qualification Evaluation;
- c) Technical Evaluation;
- d) Technical Presentation / Demonstration / PoC;
- e) Financial Bid Opening of Technically Qualified Bidders;
- f) Selection of Lowest Financial Bidder (L1).

##### 3.1.1 Pre-Qualification

- i. Authority shall validate the Set 1 “RFP Document fee & Bid Security/Earnest Money Deposit (EMD)”.
- ii. If the contents of Set 1 are as per requirements, Authority shall open the Set 2 “Pre- Qualification Bid”. Each of the Pre-Qualification conditions mentioned in the document is MANDATORY. In case, the Bidder does not meet any one of the conditions, the Bidder shall be disqualified.
- iii. Bidders will be informed of their qualification/disqualification based on the Pre- Qualification criteria through Email and Phone and subsequently, the Bid Security amount shall be returned to the respective disqualified Bidders, after the submission of Performance Bank Guarantee by the successful Bidder. Bids of only those bidders who meets the Pre-Qualification criteria, shall be considered for further evaluation i.e., Stage – 2: Technical Evaluation
- iv. Technical and Price bids for those Bidders who don’t pre-qualify will not be opened. Price bids will not be opened for those Bidders, who don’t qualify the technical evaluation. Bid Security amount shall be returned for those who don’t qualify the financial evaluation stage after Performance Bank Guarantee is submitted by successful Bidder.

### 3.1.2 Technical Evaluation

- i. “Technical bid” will be evaluated only for the Bidders who succeed in Stage 1.
- ii. Authority will review the technical bids of the short-listed bidders to determine whether the technical bids are substantially responsive. Bids that are not substantially responsive are liable to be disqualified at Authority’s discretion.
- iii. The bidders' technical solutions proposed in the bid document shall be evaluated as per the requirements specified in the RFP and technical evaluation framework as mentioned in the RFP.
- iv. The Bidders shall make a presentation to the Authority/ Committee appointed by the Authority to supplement their bids which include the following:
  - Approach & Methodology including Project Experience
  - Proposed Solution
  - Manpower – Technical Resources
  - Proof of Concept of proposed solution
- v. The Authority envisages to have proof of concept / technical demonstration to evaluate the technology & system performance for achieving the intended business outcomes. During the Demonstration/Proof-of-Concept (PoC) at technical evaluation stage, the Evaluation Committee will give special attention to verify the quality, robustness and appropriateness of the proposed solution/ equipment(s). If any brand / products are found unsuitable, Bidder may get disqualified or may be asked to replace the product with better products, meeting the tender requirements, without any change in commercial bid. POC shall be performed as per use cases provided by the Authority in the RFP. Bidder shall be asked to demonstrate such use cases either in local setup or existing deployments (on the same product and equipment stack as proposed in RFP response) over network/cloud.) at the discretion of the Authority.
- vi. The Bidder shall be required to exhibit overall solution architecture along with compliance to functional and non-functional requirements of the RFP, through presentation.
- vii. The Authority will notify the date and venue for conducting such PoC / Technical demonstration to the prospective bidders.
- viii. The Bidder shall bear all the costs associated with PoC except for PoC venue which shall be made available by the Authority.
- ix. Each Technical Bid will be assigned a technical score out of a maximum of 100 marks. Only those bidders who get a minimum technical score of 70% will qualify for the commercial evaluation stage.

### 3.2 Stage 2: Commercial Evaluation

- i. All the technically qualified Bidders will be notified to participate in the Commercial Bid opening process.
- ii. The Price bids of the technically qualified Bidders shall then be opened on the notified date and time and reviewed to determine whether the Price bids are substantially responsive. Bids that are not substantially responsive are liable to be disqualified at Authority’s discretion.
- iii. Price Bids that are not as per the format provided in the RFP shall be liable for rejection.
- iv. The bid price shall include all taxes and levies and shall be in Indian Rupees and mentioned separately.
- v. The final value/cost of the project would be considered inclusive of all taxes and levies.

- vi. The Authority or any other government agency shall not have any liability of paying any taxes (including GST)/charges/levies as part of this project. The bidder has to quote their Price duly factoring all these costs over the project duration.
- vii. If there is any discrepancy in the Price Bid, it will be dealt as per the following:
- viii. If, in the price structure quoted for the required Product and Services, there is discrepancy between the unit price and total price (which is obtained by multiplying the unit price by the quantity), only the total price/cost as quoted in the table in the Price Bid Format 1 shall prevail. The unit prices quoted in Section A.3.2 of Annexure 3, Format 2, shall be considered only in case of any deviations/modifications in the scope of the work in due course.
- ix. If there is a discrepancy between words and figures, the amount in words shall prevail.

### 3.3 Successful Bidder Evaluation

The Selection of the Successful Bidder shall be through a two-stage quality cum least cost selection.

#### 3.3.1 Stage 1: Technical Evaluation

The first stage consists of Pre-qualification and Technical Criteria evaluation. The minimum qualifying marks for the 1st stage shall be 70 marks out of 100 marks. Only bidders who secure the minimum qualifying marks will be considered "Technically Qualified" and eligible for the Financial Evaluation.

#### 3.3.2 Stage 2: Financial Evaluation

The Financial Bids of only the Technically Qualified Bidders will be opened. The bidder quoting the Lowest Evaluated Financial Bid (L1) among technically qualified bidders shall be considered for award of Contract.

#### 3.3.3 Selection of Winner

The bidder quoting the Lowest Evaluated Financial Bid (L1) among technically qualified bidders shall be considered for award of Contract.

The USCL reserves the right to accept any proposal or reject any or all the proposals without assigning any reasons and any liability whatsoever including financial liability. The Client also reserves the right to close or cancel the entire process of selection at any point without assigning any reasons whatsoever and without any liability whatsoever.

### 3.4 PRE-QUALIFICATION CRITERIA

The Bidder must possess the requisite experience, strength, and capabilities in providing services necessary to meet the requirements as described in the RFP document. Keeping in view the complexity and volume of the work involved, following criteria are prescribed as the eligibility criteria for the bidder interested in undertaking the project. The bidder must also possess technical know-how and financial ability that would be required to successfully provide Design, Implementation, System Integration, Operation and Maintenance services sought by the Authority for the entire agreement duration. The bids must be complete in all respects and should cover the entire scope of work as stipulated in the bid document. This invitation to bid is open to all Bidders who qualify the eligibility criteria given below:

The Bidder shall meet the following minimum eligibility criteria:

#### (A) Legal & Financial Capacity

1. The Bidder shall be a legal entity registered, under the Companies Act 1956/2013 in India or LLP firm/ Partnership firm under Partnership Act of 1932, in India with minimum 5 years of existence.
2. The Bidder shall have an average annual turnover of at least **INR 75.00 Crores** during the last three financial years ending on 31 March 2025 (Audited)/2026 (Provisional).
3. The Bidder (including all members of Consortium) shall have positive net worth in the last three financial years.

#### (B) Technical Experience

Bidder shall demonstrate capability to execute projects of similar scale. The bidder shall be a System Integrator with direct execution responsibility. Pure trading entities shall not be eligible.

4. The Bidder (or any Consortium member) shall have experience for Implementation of ICT/ITES/System Integration project in India in last 5 years in following categories
  - At least one project of value  $\geq$  INR 75.00 Crores, OR
  - At least two projects of value  $\geq$  INR 45.00 Crores each, OR
  - At least three projects of value  $\geq$  INR 30.00 Crores each.
5. The Bidder (or any Consortium member) shall have successfully executed at least one (1) project each in at least two (2) of following categories for Central Govt./State Govt./ PSUs/ Defence /Urban Local bodies/Smart Cities/Religious Events in India in last 7 years as on Bid Submission Date:
  - (i) Outdoor CCTV Surveillance system with minimum 500 cameras in single project.
  - (ii) Artificial Intelligence (AI) based Video Analytics for outdoor CCTV surveillance system with minimum 100 number Analytics or camera channels.
  - (iii) Design, Build and Maintenance of Cloud based/On-Premises Data Centre.
  - (iv) Integration of at least two (2) components from the list below with Integrated command Centre Application / Software:
    - City Surveillance / Video Management System
    - Variable Message Display (VMD)
    - Artificial Intelligence based Video Analytics
    - Parking Management System
    - Automatic Number Plate Recognition System (ANPR)

GIS-based platforms, simulation systems, or Digital Twin / advanced analytics platforms, LiDAR-based crowd/traffic analytics platform shall be preferred and evaluated under technical scoring.

#### (C) OEM & Consortium

6. The Bidder shall submit authorization letters from OEMs for all critical components (CCTV, Cameras, VMS, AI analytics, Networking, Drones, Radio Communication, etc.).
7. OEMs shall provide Project-specific commitment; Back-to-back support for 5 years; and Confirmation of supply, warranty, and integration support.
6. Consortium of up to maximum three (3) members shall be permitted.

7. The Lead Member shall have at least 51% stake and shall be responsible for overall execution.

#### (D) Certification

8. The Bidder/Lead Member shall have mandatory certifications like ISO 27001:2013, ISO 9001:2015 and CMMi Level 3 or above

#### (E) Compliance

9. The Bidder shall not have been blacklisted/debarred by any Government entity in India.
10. The Bidder shall have local support capability in Madhya Pradesh or provide an undertaking for the same.
11. The Bidder / OEM should comply with Government of India Order dated 23.07.2020 (GFR Rule 144(xi)). The Bidder / OEM from countries sharing land border with India must be registered with DPIIT.

### 3.5 TECHNICAL EVALUATION CRITERIA

Given the scale and criticality of Simhastha 2028, bidders must demonstrate proven capability in large-scale, real-time surveillance and crowd management systems, including deployment of 500+ cameras, integration of AI-based analytics, and operation of mission-critical command centres. The proposed solution shall be fully aligned with the six-layer ICCC architecture defined in the RFP, including Digital Twin-enabled predictive decision support.

Technical Evaluation shall be carried out based on the following criteria (Total: 100 Marks):

| Criteria                                  | Sub Criteria                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Marks    |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| (A) Bidder Experience                     | <ul style="list-style-type: none"> <li>Experience in ICT/ITES/System Integration/large scale surveillance project – 10 marks</li> <li>Experience in crowd/event management systems – 5 marks</li> <li>Experience in Government/Smart City projects – 5 marks</li> </ul>                                                                                                                                                                                                                                                                                                                                        | 20 Marks |
| (B) Proposed Solution & Architecture      | <p>Bidder shall design system scalable for additional camera deployment beyond initial estimates without major architectural changes. The proposed solution must align with the six-layer ICCC architecture defined in RFP, including Digital Twin integration and predictive analytics capabilities</p> <ul style="list-style-type: none"> <li>Compliance with ICCC architecture &amp; scalability – 5 marks</li> <li>Integration with Digital Twin &amp; simulation systems – 5 marks</li> <li>AI-based analytics capabilities – 5 marks</li> <li>Cybersecurity &amp; system resilience – 5 marks</li> </ul> | 20 Marks |
| (C) Approach & Methodology                | <ul style="list-style-type: none"> <li>Implementation strategy &amp; phasing – 5 marks</li> <li>Peak load / Shahi Snan day management strategy – 5 marks</li> <li>Risk mitigation &amp; contingency planning – 5 marks</li> </ul>                                                                                                                                                                                                                                                                                                                                                                              | 15 Marks |
| (D) Proof of Concept (PoC)/ Demonstration | <p>PoC must demonstrate crowd density estimation (high-density simulation); real-time alerts; Dashboard integration; multi-camera feed processing</p> <ul style="list-style-type: none"> <li>Real-time analytics capability – 5 marks</li> </ul>                                                                                                                                                                                                                                                                                                                                                               | 15 Marks |

|                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |           |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
|                                                | <ul style="list-style-type: none"> <li>• Crowd density / anomaly detection – 5 marks</li> <li>• Dashboard usability &amp; responsiveness – 5 marks</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |           |
| (E) OEM Strength & Technology                  | <ul style="list-style-type: none"> <li>• OEM credentials and deployments – 5 marks</li> <li>• Compliance with standards (ONVIF, BIS, etc.) – 5 marks</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 10 Marks  |
| (F) Key Personnel                              | <ul style="list-style-type: none"> <li>• Project Director – 2 marks</li> <li>• Project Manager – 1 mark</li> <li>• ICCC Operations Manager – 1 mark</li> <li>• Network Lead – 1 mark</li> <li>• Cybersecurity Lead – 1 mark</li> <li>• AI Analytics Lead – 1 mark</li> <li>• Digital Twin / GIS Expert – 1 mark</li> <li>• VMS Expert – 1 mark</li> <li>• Field Deployment Lead – 0.5 mark</li> <li>• Data Center/Cloud Expert – 0.5 mark</li> </ul>                                                                                                                                                                                                              | 10 Marks  |
| (G) Manpower & O&M Plan                        | <p>For 24x7 ICCC operations experience with large deployment manpower (&gt;50 personnel), the bidder shall submit detailed deployment plan demonstrating capability to complete installation and commissioning and O&amp;M within defined timelines, for different phased as under:</p> <ul style="list-style-type: none"> <li>• Design, procurement, installation, testing and commissioning of permanent works/ infrastructure</li> <li>• Design, procurement, installation, testing and commissioning, O&amp;M (9 months) of temporary works /rental infrastructures</li> <li>• O&amp;M of permanent works/infrastructure for 5 years after Go-live</li> </ul> | 5 Marks   |
| (H) Certification; Innovation & Value Addition | <ul style="list-style-type: none"> <li>• Certification: ISO 27001:2013, ISO 9001:2015 and CMMi Level 3 or above – 3 marks</li> <li>• Innovation: Digital Twin, Lidar, Drones, Social Media Analytics, etc. – 2 marks</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                   | 5 Marks   |
| Total                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 100 Marks |

**Minimum qualifying marks in Technical Evaluation shall be 70%.**

**Only bidders achieving 70% or more marks shall qualify for opening of Financial Bid.**

**Important Notes:**

- (1) Authority reserves the right to
- seek additional demonstrations,
  - conduct OEM verification,
  - conduct site verification,
  - verify credentials independently,

- seek clarifications,
  - and reject bids based on adverse findings.
- (2) Submission of false/fabricated credentials, manipulated certificates, forged OEM authorization, or misleading claims shall result in:
- immediate disqualification,
  - forfeiture of EMD,
  - blacklisting recommendation,
  - and legal action.

### **3.5.1 OEM Credentials & Capability Assessment**

The Bidder shall propose only reputed, established, and enterprise-grade OEMs for critical components of the ICCC ecosystem. The proposed OEMs shall satisfy the following minimum requirements:

#### **A. Eligible OEM Categories**

OEM credential requirements shall apply, wherever applicable, to:

- Surveillance Cameras;
- VMS Platform;
- AI Analytics Platform;
- Digital Twin Platform;
- Networking Equipment;
- Cybersecurity Solutions;
- Storage & Compute Infrastructure;
- Video Wall Systems;
- Wireless Communication Systems;
- GIS Platform;
- and other critical enterprise infrastructure.

#### **B. OEM Experience Requirements**

The proposed OEM shall have:

- minimum 5 years' experience in manufacturing/development/support of the proposed product category as on bid submission date; and
- successful deployment experience in Government / Smart City / Safe City / Command Centre / Large Public Event / Enterprise projects.

#### **C. Large Project Deployment Experience**

The proposed OEM for critical components shall have experience of implementation in at least:



- 2 large Government / Smart City / Safe City / ICCC / Integrated Surveillance / Public Safety projects in India or globally;

OR

- 1 project involving:
  - minimum 1000+ IP cameras,
  - or city-scale command center deployment,
  - or large-event surveillance deployment,
  - or integrated AI-video analytics implementation.

#### **D. OEM Authorization**

The Bidder shall submit OEM Authorization Form (MAF); back-to-back support commitment; warranty support commitment; and escalation support commitment from all critical OEMs.

#### **E. OEM Support Commitment**

The OEM shall provide L2/L3 support; firmware/software updates; patch management; security updates; escalation matrix; and onsite/remote support during critical event periods including Major Snan Days.

#### **F. Product Lifecycle Requirement**

The proposed products/components shall not be End-of-Life (EOL), End-of-Support (EOS), or obsolete as on bid submission date.

The OEM shall provide undertaking that the offered products shall remain supported for minimum 5 years for permanent infrastructure.

#### **G. Compliance & Certifications**

The proposed OEM/products shall comply with applicable standards/certifications such as:

- ISO 9001;
- ISO 27001 (where applicable);
- CE/FCC/BIS;
- ONVIF;
- STQC (where applicable);
- CERT-In compliance support;
- and other applicable industry standards.

#### **H. Local Support Presence**

The OEM or its authorized support partner shall have support presence in India; and capability to provide timely support, spares, and escalation assistance during Project implementation and O&M period.

#### **I. Spare & Service Assurance**

The OEM shall ensure availability of spare parts, replacement units, software support, licenses, and technical assistance throughout the Contract Period.

#### **J. Restriction on Blacklisted OEMs**

OEMs currently blacklisted, debarred, restricted, or banned by Government of India / State Governments / PSU / Smart City SPVs / statutory authorities shall not be permitted.

#### **K. Interoperability Requirement**

All OEM products shall support open standards, API-based integration, interoperability, and seamless integration with ICCC ecosystem components.

#### **L. Authority Rights**

The Authority reserves the right to verify OEM credentials; seek additional documentary evidence; interact with OEMs directly; reject unsupported/non-compliant OEMs; and require replacement of proposed OEMs during evaluation stage.

### **3.5.2 Key Personnel & Deployment Methodology**

The Bidder shall propose qualified, experienced, and dedicated Key Personnel for implementation, integration, operations, cybersecurity, AI analytics, Digital Twin operations, and overall management of the Project. The proposed Key Personnel shall possess minimum educational qualifications, certifications, and relevant project experience as specified in this RFP.

The Authority shall evaluate qualifications, certifications, relevant experience, Smart City / ICCC / Safe City / surveillance project experience, deployment approach, manpower strength, operational readiness, and availability commitment of the proposed Key Personnel.

Only personnel directly employed by the Bidder / Consortium Member / authorized implementation partner shall be considered unless otherwise approved by the Authority.

#### **“Minimum Qualification Requirements of Key Personnel”**

| <b>SNo.</b> | <b>Position</b>           | <b>Minimum Qualification</b>                 | <b>Minimum Experience</b> |
|-------------|---------------------------|----------------------------------------------|---------------------------|
| 1           | Project Director          | B.E./B.Tech/MCA/M.Tech                       | 15 Years                  |
| 2           | Project Manager           | B.E./B.Tech + PMP/Prince2 preferred          | 10 Years                  |
| 3           | ICCC Operations Manager   | Graduate/Engineer                            | 8 Years                   |
| 4           | Network Lead              | B.E./B.Tech + CCNP equivalent                | 8 Years                   |
| 5           | Cybersecurity Lead        | B.E./B.Tech + CEH/CISSP preferred            | 8 Years                   |
| 6           | AI Analytics Lead         | AI/ML/Data Science background                | 7 Years                   |
| 7           | Digital Twin / GIS Expert | GIS/Geo-Informatics qualification            | 7 Years                   |
| 8           | VMS Expert                | Relevant certification preferred             | 5 Years                   |
| 9           | Field Deployment Lead     | Diploma/Engineer                             | 5 Years                   |
| 10          | Data Center/Cloud Expert  | Virtualization/Cloud Certification preferred | 7 Years                   |

### 3.6 FINANCIAL EVALUATION

Financial Bids of only technically qualified bidders shall be opened.

The bidder quoting the lowest evaluated Financial Bid (L1) shall be declared the Selected Bidder.

In case of discrepancy between words and figures, the lower value shall prevail.

Authority reserves the right to seek price breakups, justification, and clarification for abnormally low or unbalanced bids.

### 3.7 TIE RESOLUTION

In case two or more technically qualified bidders quote the same Lowest Financial Bid (L1), the bidder having higher Technical Score shall be ranked higher.

If the Technical Scores are also equal, the bidder having higher turnover during the last three financial years shall be ranked higher.

If the tie still persists, Authority may:

- invite tied bidders for additional presentation/discussion; or
- invite revised financial bids from tied bidders; or
- adopt any other transparent method deemed appropriate.

The decision of the Authority in tie resolution shall be final and binding on all bidders.

### 3.8 RIGHT TO NEGOTIATE

Authority reserves the right to negotiate with the Lowest Financial Bidder (L1) for:

- price optimization,
- scope rationalization,
- deployment optimization,
- commercial alignment,
- and project implementation strategy,

without materially altering the RFP conditions.

The Authority may also negotiate:

- reduction or rationalization of costs,
- conversion of components between permanent and temporary/rental deployment,
- enhancement of infrastructure quantities,
- inclusion/exclusion of items,
- and optimization of project scope in accordance with operational requirements and budgetary considerations.

The bidder shall extend full cooperation during negotiations and shall furnish all clarifications, revised proposals, breakups, justifications, and supporting documents as may be required by the Authority.

If the selected bidder fails to cooperate in negotiations, withdraws its bid, refuses to accept negotiated terms, or fails to sign the Contract within the stipulated timeline, the Authority reserves the right to reject the bid, forfeit the EMD, cancel the award, and/or invite the next eligible bidder for negotiations and award.

Nothing contained herein shall obligate the Authority to conclude negotiations or award the Contract to any bidder.

The Authority reserves the absolute right to accept, reject, modify, or annul the bidding process at any stage without assigning any reason whatsoever.

## SECTION 4 – AWARD OF CONTRACT

### 4. AWARD OF CONTRACT

#### 4.1 Right to Accept Any Proposal and To Reject Any or All Proposal(s)

The Authority reserves the right to accept or reject any proposal, and to annul the tendering process / and reject all proposals at any time prior to award of contract, without thereby incurring any liability to the affected Bidder or Bidders or any obligation to inform the affected Bidder or Bidders of the grounds for Authority action.

#### 4.2 Notification of Award

Prior to the expiration of the validity period, USCL will notify the successful bidders in writing or via email, that its proposal has been accepted. In case the tendering process has not been completed within the stipulated period, USCL may like to request the bidders to extend the validity period of the bid.

The decision to extend the validity period of a Bidder's Proposal shall be the Bidder's sole prerogative.

#### 4.3 Contract Finalization and Award

The "Letter of Acceptance (LOA)" will be issued under signature of competent authority of USCL.

The LOA will be sent in duplicate to the successful bidder, who will return one copy to the USCL duly acknowledged and signed by the authorized signatory, within one week of receipt of the same.

On this basis, the draft contract agreement would be finalized for award & signing.

Upon notification of award to the successful Bidder, USCL will promptly notify each unsuccessful Bidder.

#### 4.4 Performance Bank Guarantee (PBG)

Within fifteen (15) working days from the date of issuance of LOA, the successful Bidder shall at his own expense submit unconditional and irrevocable Performance Bank Guarantee (PBG) to the Authority. The PBG shall be from a Scheduled Commercial Bank (Scheduled Public Sector Bank or Scheduled Private Sector Bank) or any Nationalized Bank in the format prescribed in

Annexure 5, payable on demand, for the due performance and fulfilment of the contract by the bidder.

This Performance Bank Guarantee shall be for an amount equivalent to **3%** (three percent) of total contract value. PBG shall be invoked by Authority, in the event the Bidder:

- fails to meet the overall penalty/LD condition as mentioned in RFP Volume II or any changes agreed between the parties,
- fails to perform the responsibilities and obligations as set out in the RFP to the complete satisfaction of Purchaser, or
- misrepresents facts/information submitted to Purchaser

The performance bank guarantee shall be valid till satisfactory completion of Project. The performance bank guarantee may be discharged/returned by Authority upon being satisfied that there has been due performance of the obligations of the bidder under the contract. However, no interest shall be payable on the performance bank guarantee.

In the event of the Bidder being unable to service the contract for whatever reason(s), Authority shall have the right to invoke the PBG. Notwithstanding and without prejudice to any rights whatsoever of Purchaser under the contract in the matter, the proceeds of the PBG shall be payable to Authority as compensation for any loss resulting from the bidder's failure to perform/comply its obligations under the contract.

Authority shall notify the bidder in writing of the exercise of its right to receive such compensation within 30 days, indicating the contractual obligation(s) for which the bidder is in default. Authority shall also be entitled to make recoveries from the SI's bills, performance bank guarantee, or from any other amount due to him, an equivalent value of any payment made to him due to inadvertence, error, collusion, misconstruction or misstatement.

In case the project is delayed or extended beyond the project schedule as mentioned in RFP Vol II, the performance bank guarantee shall be accordingly extended by the SI till completion of scope of work as mentioned in RFP Volume II.

On satisfactory performance and completion of the order in all respects and duly certified to this effect by the Project in-charge, Contract Completion Certificate shall be issued and the PBG would be returned to the Bidder.

#### **4.5 Warranty & Maintenance**

##### **Warranty**

Warranty would be for 5 years and should start from the Go live date for all the solutions, During the warranty period of 5 years, the bidder shall warrant that the goods supplied under the contract are new, unused, of the most recent version/models and incorporate all recent improvements in design and materials unless provided otherwise in the contract. The SI further warrants that the goods supplied under this contract shall have no defects arising from design, materials or workmanship.

Authority or designated representatives shall promptly notify SI in writing of any claims arising under this warranty. Upon receipt of such notice, the SI shall, within the warranty period and with all reasonable speed, repair or replace the defective systems, without costs to Authority and within time specified and acceptable to Authority.

During the comprehensive warranty period, the SI shall provide all product(s) and documentation updates, patches/fixes, and version upgrades within 15 days of their availability and should carry out installation and make operational the same at no additional cost to Authority.

The SI hereby warrants Authority that:

- i. The implemented integrated solution represents a complete, integrated solution meeting all the requirements as outlined in the RFP and further amendments if any, and provides the functionality and performance, as per the terms and conditions specified in the contract.
- ii. The proposed integrated solution shall achieve parameters delineated in the technical specification/requirement.
- iii. The SI shall be responsible for warranty services from OEMs/licensors of products included in the systems.
- iv. The SI undertakes to ensure the maintenance of the acceptance criterion/standards in respect of the systems during the warranty period.

## **Operations and Maintenance (O&M)**

SI shall also provide complete O&M support on year to year basis, for all the proposed integrated solution as outlined in this RFP for a period of 5 years from the date of go-live i.e. "Go-Live". "Go-live" is the date on which the proposed solution is operational as per the requirements provided in this RFP and all the acceptance tests are successfully concluded to the satisfaction of Authority.

If the successful bidder, having been notified, fails to remedy the defect(s) within the period specified in the contract, Authority may proceed to take such reasonable remedial action as may be necessary, at the SI's risk and expense and without prejudice to any other rights, which Authority may have against the SI under the contract.

Authority will have the right to extend / reduce the number of O&M period, as and when required, on a prior notice of 90 days. Payment shall be made on the Pro-Rata basis as per the quoted price by the SI.

### **4.6 Signing of Contract**

After the notification of award, Authority will issue Letter of Acceptance (LOA). Accordingly, a contract shall be signed between successful bidder and Authority or the agency designated by Authority. As an acceptance of the LOA, the successful bidder shall sign and return a duplicate copy to Authority, or the agency designated by Authority. The bidder shall return the duplicate copy along with a Performance Bank Guarantee within 15 working days from the date of issuance of LOA.

On receipt of the Performance Bank Guarantee, Authority or the agency designated by Authority shall enter into a contract with the successful bidder. The Master Service Agreement is provided in RFP Volume III. Post signing of the contract, purchaser shall issue the Work Order to the successful bidder.

### **4.7 Failure to agree with the Terms & Conditions of the RFP**

Failure of the successful bidder to agree with the Terms & Conditions of the RFP shall constitute sufficient grounds for the annulment of the award, in which event Purchaser may award the contract to the next best value bidder or call for new bids. In such a case, Purchaser shall invoke the PBG and/or forfeit the EMD.

### **4.8 SLA Recovery Rights**

SLA penalties shall be recoverable independently from:

- milestone payments,
- O&M payments,
- performance security,
- or any other payable dues.

## SECTION 5 – GENERAL CONDITIONS & BID GOVERNANCE

### 5. GENERAL CONDITIONS & BID GOVERNANCE

#### 5.1 General

The provisions contained in this Section shall govern the bidding process; bidder/SI conduct; governance framework; contractual integrity; operational responsibilities; and legal obligations in relation to the Project.

The bidder/SI shall comply with all terms, conditions, procedures, guidelines, and requirements specified in the RFP and subsequent Contract Agreement.

#### 5.2 Authority Rights

##### 5.2.1 Absolute Discretion of Authority

USCL reserves the absolute right to accept or reject any bid; annul the bidding process; modify the scope; cancel or reissue the RFP; negotiate with bidders; split the scope; or abandon the procurement process at any stage without assigning any reason and without incurring any liability whatsoever.

##### 5.2.2 Scope Modification Rights

The Authority reserves the right to increase or decrease quantities; add/delete components; convert permanent infrastructure into rental infrastructure or vice versa; revise deployment locations; and optimize implementation strategy based on operational, financial, administrative, technical, security, or policy considerations.

##### 5.2.3 Multi-Agency Coordination

The Bidder/SI shall coordinate with USCL, District Administration, Police Department, Mela Authority, State Government Departments, Utility Agencies, and other stakeholders without any additional financial implication unless specifically approved.

#### 5.3 Bid Validity

The bid shall remain valid for a minimum period specified in the Fact Sheet from the last date of bid submission. The Authority may seek extension of bid validity and corresponding EMD validity.

#### 5.4 Earnest Money Deposit (EMD)

##### 5.4.1 Submission

The bidder shall furnish EMD in the prescribed format and amount as specified in the RFP.

##### 5.4.2 Forfeiture of EMD

EMD may be forfeited if the bidder withdraws the bid; submits false information; refuses clarification; refuses negotiated terms; fails to furnish Performance Security; fails to sign Contract Agreement; or commits any material breach during bid process.

#### 5.5 Performance Security

The selected bidder shall furnish Performance Security in the prescribed format and amount within stipulated timelines.



Failure to furnish Performance Security may result in cancellation of award, forfeiture of EMD, and further legal/administrative action.

## **5.6 Fraud & Corrupt Practices**

### **5.6.1 Prohibited Practices**

The bidder shall not directly or indirectly engage in bribery, collusion, coercion, fraudulent practices, anti-competitive conduct, undue influence, or corrupt practices.

### **5.6.2 Consequences**

If the Authority determines that a bidder has engaged in prohibited practices, the Authority may reject the bid, forfeit EMD/PBG, terminate contract, blacklist/debar the bidder, and initiate legal proceedings.

## **5.7 Conflict of Interest**

### **5.7.1 Conflict Restriction**

The bidder shall not have any conflict of interest that materially affects fair competition or project execution.

### **5.7.2 Disclosure**

The bidder shall disclose ownership structure, related-party relationships, consortium relationships, and potential conflicts.

### **5.7.3 Authority Decision**

The decision of the Authority regarding existence of conflict shall be final and binding.

## **5.8 Confidentiality**

### **5.8.1 Confidential Information**

All operational information, surveillance data, project information, security architecture, credentials, analytics outputs, Digital Twin datasets, and sensitive information shall be treated as confidential.

### **5.8.2 Non-Disclosure**

The bidder/SI shall not disclose, publish, share, reproduce, or misuse any confidential information without prior written approval of USCL.

### **5.8.3 Survival**

Confidentiality obligations shall survive completion, expiry, or termination of contract.

## **5.9 Data Ownership & Usage Rights**

### **5.9.1 Ownership**

All video feeds, analytics outputs, AI datasets, GIS layers, Digital Twin datasets, reports, dashboards, logs, operational intelligence, and project-generated data shall remain sole property of USCL/Government.

### **5.9.2 Usage Restriction**

The SI shall not commercially exploit, reuse, replicate, publish, transfer, or externally utilize project data without written approval of USCL.

### **5.9.3 Data Localization**

Project data shall be stored and processed in accordance with applicable Government guidelines and cybersecurity advisories.

## **5.10 Intellectual Property Rights (IPR)**

### **5.10.1 Ownership of Custom Developments**

All customizations, workflows, integrations, dashboards, and project-specific developments created for the project shall be licensed perpetually for use by USCL.

### **5.10.2 Third-Party Software**

The SI shall ensure that valid licenses, OEM rights, and legal usage rights exist for all supplied software/components.

### **5.10.3 Indemnity**

The SI shall indemnify USCL against IPR infringement claims, copyright violations, licensing disputes, and related legal claims.

## **5.11 Cybersecurity Obligations**

### **5.11.1 Security Compliance**

The bidder/SI shall comply with:

- CERT-In guidelines,
- Government cybersecurity advisories,
- applicable standards,
- and security best practices.

### **5.11.2 Security Responsibility**

The SI shall remain fully responsible for:

- secure configuration,
- patch management,
- vulnerability remediation,
- secure integration,
- and cybersecurity hardening.

### **5.11.3 Cyber Incident Liability**

Cyber incidents arising due to:

- negligence,
- insecure configuration,
- delayed patching,
- weak controls,
- or non-compliance

shall be attributable to the SI.

## **5.12 OEM Authorization & Responsibility**

### **5.12.1 OEM Authorization**

The bidder shall submit valid OEM authorization for critical components as specified in the RFP.

### **5.12.2 OEM Support Commitment**

OEMs shall provide warranty, technical support, software updates, and escalation support.

### **5.12.3 End-of-Life Restriction**

The bidder shall not supply end-of-life, unsupported, or obsolete products without prior approval of USCL.

## **5.13 Consortium & Subcontracting**

### **5.13.1 Consortium Conditions**

Consortium participation, if permitted, shall comply with RFP conditions.

Lead bidder shall remain fully responsible for execution, integration, SLA compliance, and contractual obligations.

### **5.13.2 Subcontracting Restrictions**

Subcontracting of critical components/functions shall require prior approval of USCL.

The SI shall remain fully liable for subcontractor performance.

## **5.14 Site Access & Permissions**

The SI shall obtain necessary permissions, coordinate with authorities, comply with local regulations, and ensure lawful execution.

## **5.15 Safety Obligations**

### **5.15.1 Safety Compliance**

The SI shall comply with electrical safety, fire safety, labor safety, and public safety requirements.

### **5.15.2 Site Safety**

The SI shall ensure barricading, signage, PPE usage, traffic safety, and accident prevention measures.

## **5.16 Insurance**

The SI shall obtain and maintain workmen compensation insurance, third-party liability insurance, equipment insurance, transit insurance, and other applicable insurance policies.

## **5.17 Audit Rights**

### **5.17.1 Audit Access**

USCL or authorized agencies may inspect sites, audit systems, review records, inspect documentation, and verify compliance.

### **5.17.2 Cooperation**

The SI shall provide full cooperation during audits, inspections, investigations, and reviews.

## **5.18 Change Request Management**

### **5.18.1 Change Requests**

USCL may issue change requests for scope modifications, quantity revisions, deployment changes, and technical enhancements.

### **5.18.2 Evaluation**

The SI shall submit technical impact, commercial impact, timeline impact, and implementation implications for each change request.

## **5.19 Delay & Liquidated Damages**

### **5.19.1 Delay Responsibility**

The SI shall be responsible for timely completion of all milestones

### **5.19.2 Liquidated Damages**

Delay in milestone completion may attract liquidated damages, payment withholding, SLA penalties, and other contractual remedies.

For delay in achieving milestones, Liquidated Damages shall be levied at 0.5% of the Contract Value per week of delay, subject to a maximum of 10% of the Contract Value.

LD shall be without prejudice to any other remedies available to the Authority.

SLA penalties shall be independent of Liquidated Damages and may be levied concurrently.

Imposition of penalties shall not relieve the SI of its obligation to meet performance requirements.

## **5.20 Force Majeure**

### **5.20.1 Definition**

Force Majeure shall include natural disasters, war, riots, acts of Government, epidemics, and events beyond reasonable control.

### **5.20.2 Notice Requirement**

Affected party shall notify the other party promptly regarding Force Majeure occurrence.

### **5.20.3 Exclusions**

Financial hardship, resource shortage, subcontractor failure, or avoidable operational failures shall not constitute Force Majeure.

## **5.21 Termination**

### **5.21.1 Termination for Default**

USCL may terminate the Contract in case of persistent SLA failure; material breach; insolvency; fraud; security compromise; and/or operational negligence.

### **5.21.2 Termination for Convenience**

USCL reserves the right to terminate the Contract in public interest subject to applicable contractual provisions.

## **5.22 Exit Management**

### **5.22.1 Transition Support**

The SI shall provide transition support, operational continuity, knowledge transfer, configuration handover, and data migration assistance.

### **5.22.2 No Service Disruption**

The SI shall ensure no disruption during transition, contract expiry, or termination period.

## **5.23 Dispute Resolution**

Any dispute shall be resolved as follows:

Step 1: Amicable resolution within 15 days

Step 2: Escalation to senior committee within 15 days

Step 3: Arbitration under Arbitration & Conciliation Act, 1996

The seat of arbitration shall be Bhopal, Madhya Pradesh.

The language shall be English.

### **5.23.1 Amicable Resolution**

The parties shall first attempt amicable settlement of disputes.

### **5.23.2 Arbitration**

Disputes not resolved amicably may be referred to arbitration in accordance with applicable laws.

### **5.23.3 Jurisdiction**

Courts at Ujjain / Madhya Pradesh shall have exclusive jurisdiction.

## **5.24 Governing Law**

The RFP and subsequent Contract shall be governed by laws of India, Government of Madhya Pradesh rules, and applicable statutory provisions.

## **5.25 Compliance with Laws**

The bidder/SI shall comply with labor laws, taxation laws, IT laws, cybersecurity laws, safety regulations, and all applicable statutory requirements.

## **5.26 Reservation of Rights**

USCL reserves the right to seek clarifications, reject incomplete bids, verify credentials, conduct field verification, conduct OEM verification, and take decisions necessary for successful execution of the Project.

The decision of USCL shall be final and binding.

## **5.27 Public Interest & Critical Infrastructure Clause**

The bidder acknowledges that:

- Simhastha 2028 is a critical public event,
- the ICCC ecosystem constitutes critical operational infrastructure,
- and uninterrupted operations are of paramount public importance.

Accordingly, the SI shall maintain:

- highest operational standards,
- enhanced manpower readiness,
- rapid escalation support,
- and zero-critical-failure preparedness during major snan days and notified critical operational periods.

## SECTION 6 – PROJECT BACKGROUND

### 6. PROJECT BACKGROUND

#### 6.1 Introduction

Simhastha Kumbh Mela, Ujjain is one of the largest religious congregations in the world and is of immense spiritual, cultural, administrative, and national importance. The event attracts crores of pilgrims, saints, tourists, and visitors from across India and abroad over the entire event period.

The Government of Madhya Pradesh and District Administration, Ujjain are undertaking extensive infrastructure and technology interventions for safe, efficient, and coordinated management of Simhastha 2028.

#### 6.2 Need for Integrated ICCC

Considering very high pilgrim footfall, large geographical spread of Mela area, multi-agency coordination requirements, crowd safety considerations, traffic and mobility challenges, emergency response requirements, and increasing cybersecurity and operational risks, an enterprise-grade Integrated Command & Control Centre (ICCC) ecosystem is proposed for Simhastha 2028.

The ICCC shall function as the centralized operational platform for:

- surveillance,
- crowd management,
- traffic management,
- emergency coordination,
- incident management,
- AI-driven analytics,
- Digital Twin simulation,
- and decision support.

#### 6.3 Project Area & Operational Scale

The proposed ICCC ecosystem shall broadly cover:

- Mela Area,
- major ghats of River Shipra,
- major roads within Ujjain city,
- entry corridors leading to Ujjain,
- parking and holding areas,
- public congregation zones,
- transport hubs,
- and other critical operational locations.

The operational coverage includes:

- approximately 3000+ hectares of Mela Area,
- approximately 250 km road network,
- large temporary parking and holding infrastructure,
- and high-density congregation areas.

#### **6.4 Project Objectives**

The key objectives of the Project include:

- real-time situational awareness,
- enhanced crowd safety,
- proactive crowd management,
- intelligent traffic management,
- integrated emergency response,
- predictive operational intelligence,
- multi-agency coordination,
- and data-driven decision support.

The Project also aims to establish a scalable and future-ready smart governance infrastructure for Ujjain.

#### **6.5 Technology Vision**

The proposed ICCC ecosystem shall leverage advanced technologies including:

- IP-based surveillance,
- AI-driven video analytics,
- GIS-based monitoring,
- Digital Twin platform,
- predictive analytics,
- enterprise communication network,
- integrated dashboards,
- and cybersecurity framework.

The system shall support:

- real-time monitoring,
- congestion forecasting,
- simulation-based planning,
- emergency response coordination,
- and operational decision intelligence.

#### **6.6 Hybrid Infrastructure Model**

The Project shall be implemented through a hybrid deployment model comprising:

*Establishment and O&M of Integrated Command & Control Centre (ICCC) for  
Simhastha Kumbh Mela 2028*



- permanent CAPEX-based infrastructure with long-term operational utility and 60 months O&M; and
- temporary/event-specific rental infrastructure with approximately 9 months deployment and O&M during Simhashta operations.

The deployment strategy has been designed to optimize operational efficiency, scalability, cost effectiveness, and event-specific requirements.

## 6.7 Multi-Agency Operations

The ICCC ecosystem shall support integrated coordination among:

- District Administration,
- Police Department,
- Mela Authority,
- Health Department,
- Fire Services,
- SDRF/NDRF,
- Transport Authorities,
- and other stakeholder agencies.

The platform shall support unified operational workflows, integrated dashboards, and coordinated response mechanisms.

## 6.8 Project Components

The Project broadly includes:

- surveillance systems,
- AI Analytics Platform,
- Digital Twin & Decision Intelligence Platform,
- ICCC infrastructure,
- mini war-room,
- viewing centers,
- communication network,
- OFC backbone,
- cybersecurity framework,
- data center and storage systems,
- field infrastructure,
- and associated O&M services.

## **6.9 Operational Readiness**

The ICCC ecosystem shall be designed for continuous 24×7 operations, peak-load handling, high availability, redundancy, operational resilience, and rapid emergency response during major snan days and critical event periods.

## **6.10 Future Readiness**

The proposed architecture shall be scalable, interoperable, modular, and future-ready, capable of supporting future smart city initiatives, additional integrations, and evolving operational requirements beyond Simhastha 2028.

## SECTION 7 – SCOPE OVERVIEW

### 7. SCOPE OVERVIEW

#### 7.1 General

The selected System Integrator (SI) shall undertake end-to-end design, engineering, supply, installation, integration, testing, commissioning, operations, maintenance, training, and support for establishment of an enterprise-grade Integrated Command & Control Centre (ICCC) ecosystem for Simhastha 2028, Ujjain.

The Project shall be implemented through a hybrid deployment model comprising:

- permanent CAPEX-based infrastructure with 60 months O&M; and
- temporary/event-specific rental infrastructure with approximately 9 months deployment and O&M.

The detailed functional requirements, technical specifications, architecture, deployment strategy, and component-wise requirements are provided in **Volume-II of the RFP**.

#### 7.2 Broad Scope of Work

The broad scope of work shall include, but not be limited to:

- detailed survey and planning,
- system design and engineering,
- procurement and supply,
- field infrastructure deployment,
- software and platform deployment,
- integration of all subsystems,
- testing and commissioning,
- operational trial runs,
- training and capacity building,
- operations and maintenance,
- and comprehensive SLA compliance.

#### 7.3 Surveillance & Crowd Management System

The SI shall establish an integrated surveillance and crowd management ecosystem including:

- fixed IP cameras,
- PTZ cameras,
- panoramic cameras,
- thermal cameras,
- ANPR systems,
- body-worn cameras,

- dash cameras,
- drone integration,
- water surveillance systems,
- and associated monitoring infrastructure.

The surveillance coverage shall broadly include:

- ghats,
- Mela Area,
- city roads,
- entry corridors,
- parking and holding areas,
- public congregation areas,
- and other critical locations.

#### **7.4 Video Management System (VMS)**

The SI shall deploy an enterprise-grade Video Management System (VMS) integrated with:

- surveillance systems,
- AI Analytics Platform,
- GIS systems,
- Digital Twin platform,
- ICCC dashboards,
- and associated operational systems.

#### **7.5 AI Analytics Platform**

The SI shall deploy an AI-driven analytics platform for:

- crowd density analytics,
- people counting,
- heatmaps,
- congestion alerts,
- reverse flow detection,
- queue monitoring,
- traffic analytics,
- incident alerts,
- and predictive operational intelligence.

#### **7.6 Digital Twin & Decision Intelligence Platform**

The SI shall deploy a Digital Twin & Decision Intelligence Platform supporting:

*Establishment and O&M of Integrated Command & Control Centre (ICCC) for  
Simhashta Kumbh Mela 2028*

- GIS-based visualization,
- real-time operational intelligence,
- crowd simulation,
- congestion forecasting,
- traffic simulation,
- evacuation modelling,
- and operational decision support.

### **7.7 Communication Network**

The SI shall establish a resilient and scalable communication network comprising:

- OFC backbone,
- field connectivity,
- RF/wireless backup,
- Radio zone setup,
- network management systems,
- and associated communication infrastructure.

The network shall support:

- real-time video transmission,
- analytics communication,
- ICCC operations,
- and multi-location integration.

### **7.8 Cybersecurity Framework**

The SI shall establish an enterprise-grade cybersecurity framework including:

- secure network architecture,
- firewalls,
- IDS/IPS,
- SIEM integration,
- access control,
- audit logging,
- VAPT,
- and cybersecurity monitoring mechanisms.

### **7.9 Data Center / DR / Storage Infrastructure**

The SI shall establish and operationalize:

- compute infrastructure,

- storage systems,
- backup systems,
- disaster recovery mechanisms,
- virtualization infrastructure,
- and associated enterprise infrastructure required for ICCC operations.

#### **7.10 ICCC, Mini War-Room & Viewing Centers**

The SI shall establish:

- Primary ICCC,
- Secondary/Backup ICCC integration,
- Mini War-Room at Ranoji ki Chhatri,
- and approximately 10 Viewing Centers

with integrated dashboards, video wall systems, operator consoles, AV systems, and operational coordination facilities.

#### **7.11 Field Infrastructure**

The SI shall provide all required field infrastructure including:

- poles and mounting structures,
- OFC infrastructure,
- outdoor cabinets,
- power systems,
- UPS systems,
- earthing and lightning protection,
- field networking infrastructure,
- and temporary deployment infrastructure.

#### **7.12 Integration Requirements**

The SI shall ensure seamless integration among surveillance systems, VMS, AI Analytics Platform, Digital Twin platform, GIS systems, communication systems, ICCC systems, and approved third-party systems.

The architecture shall support interoperability, open APIs, scalability, and future smart city integrations.

#### **7.13 Testing, Simulation & Trial Runs**

The SI shall undertake Factory Acceptance Testing (FAT), Site Acceptance Testing (SAT), User Acceptance Testing (UAT), integrated system testing, operational trial runs, crowd simulations, emergency response simulations, failover testing, and multi-agency mock drills; before Go-Live.

#### **7.14 Operations & Maintenance (O&M)**

The SI shall provide comprehensive O&M services including preventive maintenance, corrective maintenance, monitoring, manpower deployment, software support, cybersecurity support, helpdesk services, spare management, and SLA compliance.

#### **7.15 Training & Capacity Building**

The SI shall provide operator training, administrator training, technical training, cybersecurity awareness training, and operational SOP training for personnel nominated by USCL and stakeholder agencies.

#### **7.16 Documentation & Deliverables**

The SI shall provide survey reports, design documents, architecture documents, SOPs, operational manuals, as-built drawings, asset inventory, training materials, and all required project documentation.

#### **7.17 Future Readiness**

The proposed solution shall be modular, scalable, interoperable, and future-ready, capable of supporting future operational requirements, additional integrations, and smart city initiatives beyond Simhastha 2028.

### 13. ANNEXURES

|             |                             |
|-------------|-----------------------------|
| Annexure 1  | PQ Bid Formats              |
| Annexure 2  | Technical Bid Formats       |
| Annexure 3  | Commercial Bid Formats      |
| Annexure 4  | EMD Format                  |
| Annexure 5  | Performance Security Format |
| Annexure 6  | Consortium Agreement        |
| Annexure 7  | Integrity Pact              |
| Annexure 8  | Non-Disclosure Agreement    |
| Annexure 9  | OEM Authorization Format    |
| Annexure 10 | Compliance Matrix           |



## ANNEXURE 1 – FORMATS FOR PRE-QUALIFICATION BID

### *Indicative Checklist for the Documents to be included:*

| SNo | Documents to be submitted                                                                                                                                                                                                                            | Submitted<br>(Y / N) | Documentary<br>Proof<br>(Page No.) |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------------------------|
| 1   | Bid Cover Letter and Particulars of organizations                                                                                                                                                                                                    |                      |                                    |
| 2   | Power of attorney along with board resolution to the authorized Signatory of the Bid                                                                                                                                                                 |                      |                                    |
| 3   | EMD/Bid Security INR 50,00,000.00                                                                                                                                                                                                                    |                      |                                    |
| 4   | Bid Document fee INR 50,000.00                                                                                                                                                                                                                       |                      |                                    |
| 5   | Particulars of the bidders                                                                                                                                                                                                                           |                      |                                    |
| 6   | Copy of Certificate(s) of Incorporation, Memorandum and Articles of Association, copy of purchase orders showing required years of operations or Certified true copy of relevant extracts of balance sheet and PL statements for last required years |                      |                                    |
| 7   | Certificate(s) from statutory auditor towards average annual Turnover of the entity/entities over the last three (3) financial years (2022-23,2023-24 and 2024-25)                                                                                   |                      |                                    |
| 8   | Certificate(s) from the statutory auditor towards net worth for the last three (3) financial years 2022-23,2023-24 and 2024-25                                                                                                                       |                      |                                    |
| 9   | Certified copies of valid PAN documents                                                                                                                                                                                                              |                      |                                    |
| 10  | Copy of GST registration                                                                                                                                                                                                                             |                      |                                    |
| 11  | Documents for meeting Technical Eligibility                                                                                                                                                                                                          |                      |                                    |
| 12  | Affidavit by the Bidder duly signed by the authorized signatory confirming they have not been blacklisted by any Central / State Government/Union Territories/PSUs in India during last 3 years.                                                     |                      |                                    |
| 13  | The Bidder shall possess any three (3) of the below certifications which are valid at the time of bidding:                                                                                                                                           |                      |                                    |
|     | ISO 9001:2008/ ISO 9001:2015                                                                                                                                                                                                                         |                      |                                    |
|     | ISO 14001:2015                                                                                                                                                                                                                                       |                      |                                    |
|     | ISO 20000:2011                                                                                                                                                                                                                                       |                      |                                    |
|     | ISO 27001:2013                                                                                                                                                                                                                                       |                      |                                    |
| 14  | CMMi Level 3 or above                                                                                                                                                                                                                                |                      |                                    |

## ANNEXURE 1.1

### Pre-Qualification Bid Cover Letter

*(To be submitted on the letterhead of the Bidder)*

Date: <dd/mm/yyyy>

To,  
**Executive Director**  
**Ujjain Smart City Limited**  
**Ujjain**

Subject: Establishment and O&M of Integrated Command & Control Centre (ICCC) for Simhastha Kumbh Mela 2028 – Pre-qualification/technical Bid Cover Letter regarding

Ref: RFP No :<No> Dated<DD/MM/YYYY>

Sir / Madam,

Having examined the RFP, the receipt of which is hereby duly acknowledged, we, the undersigned, offer to provide the professional services as required and outlined in the RFP for the Selection of Implementation Agency for Implementation of Surveillance System & Crowd Management System on CAPEX,OPEX and Rental basis for Ujjain Kumbh 2028.

We attach here to our responses to pre-qualification requirements, Technical and Price Bids as required by the RFP. We confirm that the information contained in these responses or any part thereof, including the exhibits, and other documents and instruments delivered or to be delivered Authority is true, accurate, verifiable, and complete. This response includes all information necessary to ensure that the statements therein do not in whole or in part mislead the department in its short-listing process.

We fully understand and agree to comply that on verification, if any of the information provided here is found to be misleading the selection process, we are liable to be disqualified from the selection process or termination of the contract during the project, if selected to do so.

We agree for unconditional acceptance of all the terms and conditions set out in the RFP Document and also agree to abide by this RFP response for a period of 180 days from the date fixed for bid submission. We hereby declare that in case the contract is awarded to us, we shall submit the performance bank guarantee bond in the form prescribed in the RFP.

We agree that you are not bound to accept any RFP response you may receive. We also agree that you reserve the right in absolute sense to reject all or any of the bids and also all or any of the products / services specified in the RFP response.

It is hereby confirmed that I / We are entitled to act on behalf of our company / corporation / firm / organization and empowered to sign this document as well as such other documents, which may be required in this connection.

Dated this \_\_\_\_\_ Day of [Month], 2026

(Signature)

(In the capacity of)

(Name)

Duly authorized to sign the RFP response for and on behalf of:

(Name and Address of Company) seal / stamp of Bidder

Witness Signature:

Witness Name:

Witness Address:

### Particulars of the Bidders

| SNo | Description                                                                                  | Details |
|-----|----------------------------------------------------------------------------------------------|---------|
| 1   | Name of the company                                                                          |         |
| 2   | Title of the Project                                                                         |         |
| 3   | Official address                                                                             |         |
| 4   | Phone No. and Fax No.                                                                        |         |
| 5   | Corporate Headquarters Address                                                               |         |
| 6   | Phone No. and Fax No.                                                                        |         |
| 7   | Website Address                                                                              |         |
| 8   | Details of Company's Registration (Please enclose copy of the company registration document) |         |
| 9   | Name of Registration Authority                                                               |         |
| 10  | Registration Number and Year of Registration                                                 |         |
| 11  | GST/CST/LST/VAT registration No. (as applicable)                                             |         |
| 12  | Permanent Account Number (PAN)                                                               |         |
| 13  | Company's Turnover for last 3 years (Year wise) as on 31st March, 2025                       |         |
| 14  | Company's Net Worth for the last 3 years (Year wise) as on 31 <sup>st</sup> March, 2025      |         |

### Financial Turnover

| Name of the Bidder                               |                                        |            |            |
|--------------------------------------------------|----------------------------------------|------------|------------|
| Financial Capability<br>(Turnover Amount In INR) | FY 2022-23                             | FY 2023-24 | FY 2024-25 |
|                                                  |                                        |            |            |
|                                                  | Average Annual Turnover for last 3 FYs |            |            |

### Net-worth

| Name of the Bidder                                |                                |            |            |
|---------------------------------------------------|--------------------------------|------------|------------|
| Financial Capability<br>(Net-worth Amount In INR) | FY 2022-23                     | FY 2023-24 | FY 2024-25 |
|                                                   |                                |            |            |
|                                                   | Net Worth in last FY (Audited) |            |            |

## ANNEXURE 1.2

### Format for Power of Attorney for Signing the Bid

*(On INR 100.00 Non judicial Stamp Paper and duly notarized)*

KNOW ALL MEN BY THESE PRESENTS,

We \_\_\_\_\_ *(name of the firm and address of the registered office)* do hereby irrevocably constitute, nominate, appoint and authorize Mr. / Ms. *(name)*, \_\_\_\_\_ son/daughter/wife of \_\_\_\_\_ and presently residing at \_\_\_\_\_, who is presently employed with us and holding the position of \_\_\_\_\_, as our true and lawful attorney *(hereinafter referred to as the "Attorney")* to do in our name and on our behalf, all such acts, deeds and things as are necessary or required in connection with or incidental to submission of our application for qualification and submission of our bid for the Project proposed by the \_\_\_\_\_ *(the "Authority")* including but not limited to signing and submission of all applications, bids and other documents and writings, participate in pre-applications and other conferences and providing information/ responses to the Authority, representing us in all matters before the Authority, signing and execution of all contracts including the Agreement and undertakings consequent to acceptance of our bid, and generally dealing with the Authority in all matters in connection with or relating to or arising out of our bid for the said Project and / or upon award thereof to us and/or till the entering into of the Agreement with the Authority.

AND we hereby agree to ratify and confirm and do hereby ratify and confirm all acts, deeds and things done or caused to be done by our said Attorney pursuant to and in exercise of the powers conferred by this Power of Attorney and that all acts, deeds and things done by our said Attorney in exercise of the powers hereby conferred shall and shall always be deemed to have been done by us.

IN WITNESS WHEREOF WE, \_\_\_\_\_, THE ABOVE-NAMED PRINCIPAL HAVE EXECUTED THIS POWER OF ATTORNEY ON THIS DAY OF \_\_\_\_\_.

For \_\_\_\_\_

*(Signature, name, designation and address)*

Witnesses:

1. (Notarized) 2.

Accepted

*(Signature, Name, Title and Address of the Attorney)*

#### Notes:

- The mode of execution of the Power of Attorney should be in accordance with the procedure, if any, laid down by the applicable law and the charter documents of the executant(s) and when it is so required, the same should be

under common seal affixed in accordance with the required procedure.

- Wherever required, the Bidder should submit for verification the extract of the charter documents and documents such as a board or shareholders' resolution/ power of attorney in favour of the person executing this Power of Attorney for the delegation of power hereunder on behalf of the Bidder.
- In case the bid is signed by an authorized Director / Partner or Proprietor of the Bidder, a certified copy of the appropriate board resolution / document conveying such authorization to Authority may be enclosed in lieu of the Power of Attorney.
- For documents executed and issued overseas, the document shall be legalised by the Indian Embassy and notarized in the jurisdiction where the Power of Attorney has been executed. However, the Power of Attorney provided by Applicants from countries that have signed the Hague Legislation Convention 1961 are not required to be legalised by the Indian Embassy if it carries a conforming Apostille certificate.

This Power of Attorney will continue to be valid so long as the said Attorney is in the employment of the Company or until 1 year from the date of issuance of the POA or upon closure of the Tender whichever is earlier. This POWER OF ATTORNEY shall automatically cease to be in effect on occurrence of any of the aforesaid event without any further action / deed by the Company.

### ANNEXURE 1.3

#### Format for Power of Attorney for Lead Member of Consortium

*(To be executed on non-judicial stamp paper of the appropriate value in accordance with relevant Stamp Act. The stamp paper to be in the name of the company who is issuing the Power of Attorney)*

Whereas \_\_\_\_\_ has invited RFP response for \_\_\_\_\_ (Name of the Project)

Whereas the Members of the Consortium comprising of M/s. \_\_\_\_\_ and M/s. \_\_\_\_\_ (the respective names and addresses of the registered offices to be given) are interested in bidding for the Project and implementing the same in accordance with the terms and conditions contained in the RFP Documents.

Whereas it is necessary for the members of the Consortium to designate one of them as the lead member with all necessary power and authority to do, for and on behalf of the Consortium, all acts, deeds and things as may be necessary in connection with the Consortium's RFP response for the Project.

NOW THIS POWER OF ATTORNEY WITNESSETH THAT

We, M/s. \_\_\_\_\_ hereby designate M/s. \_\_\_\_\_ being one of the members of the Consortium, as the lead member of the Consortium, to do on behalf of the Consortium, all or any of the acts, deeds or things necessary or incidental to the Consortium's RFP response for the Project, including submission of the RFP response, participating in meetings, responding to queries, submission of information or documents and generally to represent the Consortium in all its dealings with Authority or any other Government Agency or any person, in connection with the Project until culmination of the process of bidding till the Project Agreement is entered into with Authority and thereafter till the expiry of the Project Agreement.

We hereby agree to ratify all acts, deeds and things lawfully done by our said Attorney pursuant to this power of attorney and that all acts, deeds and things done by our aforesaid Attorney shall and shall always be deemed to have been done by us or Consortium.

Dated this the \_\_\_\_\_ day of \_\_\_\_\_ 2026

(Signature)

(Name in Block Letter of Executant)

[Seal of Company]

Witness 1

Witness 2

#### Notes:

- The mode of execution of the Power of Attorney should be in accordance with the procedure, if any, laid down by the applicable law and the charter documents of the executant(s) and when it is so required, the same should be under common seal affixed in accordance with the required procedure.

- Wherever required, the Bidder should submit for verification the extract of the charter documents and documents such as a board or shareholders' resolution/ power of attorney in favour of the person executing this Power of Attorney for the delegation of power hereunder on behalf of the Bidder.
- In case the bid is signed by an authorized Director / Partner or Proprietor of the Bidder, a certified copy of the appropriate board resolution / document conveying such authorization to Authority may be enclosed in lieu of the Power of Attorney.
- For document executed and issued overseas, the document shall be legalized by the Indian Embassy and notarized in the jurisdiction where the Power of Attorney has been executed. However, the Power of Attorney provided by Applicants from countries that have signed the Hague Legislation Convention 1961 are not required to be legalized by the Indian Embassy if it carries a conforming Apostille certificate.



## ANNEXURE 1.4

### Declaration of Non-Blacklisting

*(On INR 100.00 Non judicial Stamp Paper and duly notarized)*

Date

To,  
Executive Director  
Ujjain Smart City Limited  
Ujjain

Subject: Establishment and O&M of Integrated Command & Control Centre (ICCC) for Simhastha Kumbh Mela 2028 – Declaration of Non-blacklisting regarding

Ref: RFP No :<No> Dated<DD/MM/YYYY>

Dear Sir,

We confirm that our company or firm, ..... , is currently not blacklisted in any manner whatsoever by any Central / State Government/Union Territories/PSUs in India on any ground including but not limited to indulgence in corrupt practice, fraudulent practice, coercive practice, undesirable practice or restrictive practice.

(Signature of the Bidder)

Printed Name Designation

Seal Date:

Place:

Business Address:

## ANNEXURE 1.5

### Self-certificate for Project Execution Experience

(On Bidding Entity's Letterhead)

This is to certify that [<<Name of the Bidding entity>>] has been awarded with [<<Name of the Project>>] as detailed under:

| SNo | Description                                                                                                                          | Details<br>(filled by the bidder) |
|-----|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| 1   | Name of the Project                                                                                                                  |                                   |
| 2   | Client's Name, Contact no. and Complete Address                                                                                      |                                   |
| 3   | Contract Value for the bidder (in Indian Rupees)                                                                                     |                                   |
| 4   | Current status of the project (Completed / Ongoing)                                                                                  |                                   |
| 5   | Activities completed by bidding entity as on bid submission date (Only relevant activities as sought in the Criteria to be included) |                                   |
| 6   | Value of Work completed for which payment has been received from the client                                                          |                                   |
| 7   | Date of Start                                                                                                                        |                                   |
| 8   | Date of Completion                                                                                                                   |                                   |

(Authorized Signatory) Signature:

Name: Designation:

Bidding Entity's Name

Address:

Seal:

Date:

## **ANNEXURE 2 – FORMATS OF TECHNICAL BID**

### ***General Instructions for the Technical Bid***

Bidders have to submit a very structured and organized Technical Bid, which will be analyzed by the Technical / Evaluation Committee for compliances with regards to the requirements of the project. Since the Price Bid shall be opened for only those bidders who qualify the minimum criteria for technical bid evaluation, the quality and completeness of the information submitted by the Bidder will matter a lot while finalizing the technical scores.

Bidder is expected to divide its proposal into the following five Sections / Documents:

### ***Bidder's Competence to execute the Project***

This document should bring about the capability of the bidder to execute this project. Some of the required documents are as follows:

- Experience of Bidder in Executing Projects in required Formats and with supporting documents.
- Details of IT, Surveillance and related Manpower in the firm.
- Other parameters as required

### ***Proposed Team for the Project***

As specified in the Technical Bid Evaluation Framework, Authority will give high importance on the quality and competence of the technical manpower proposed for the project. Bidders are required to propose separate resources for different skill sets (during Design, Project Implementation & Post-Implementation/Operations & Maintenance). Following documentation is expected in this section:

- Overall Project Team (for Design, Project Implementation & Maintenance phases)
- Escalation Chart for the entire Project Duration
- Summary Table giving Qualification, Experiences, Certifications, Relevance
- Detail of the proposed resources in the Format attached

### ***Technical Solution Proposed for the Project***

Broad areas to be covered in the Technical Solution documentation are given below:

1. Describe the proposed Technical Solution in a structured manner meeting various guiding principles and compliances. Following points should be captured in the same:
  - I. Clear articulation of the design, technical solution and various components proposed in the bid including make/model of equipment with sizing of infrastructure (including diagrams and calculations wherever applicable) proposed.
    - a. Justifications for selection of the proposed technology over other available options.
    - b. Extent of compliance to technical requirements specified in the scope of work
    - c. Technical Design and clear articulation of benefits to Authority and other associated project stakeholders with respect to various components of the solution

- d. Specific emphasis on fulfilling the requirement of AI analytics and AI enabled systems etc. as specified in the RFP.
  - e. Detailed Bill of Material for the solution proposed.
- II. The overall technical solution should be structured in following sub-sections, which are being evaluated by Technical Committee for technical scores:
- a. Network Connectivity
  - b. City Surveillance System
  - g. AI based Video Analytics for Integrated Crowd Management
  - h. Video Summarization / Synopsis System
  - i. Variable Message Display
  - j. Integration of various systems / components with existing ICCC
  - k. Voice Help Centre
2. Provide detailed approach and methodology for Pre-Implementation, Implementation & Post-Implementation periods.
  3. Clearly articulate the Strategy and Approach & Methodology for installation, Configuration & Operationalization of all the key components of the project
  4. Approach & Methodology for Management of SLA specified in the RFP.
  5. Detail of Project Plan with timelines, resource allocation, milestones etc.

***Compliance Table to the Technical Requirement / Specifications***

The RFP has specified the benchmark / functional requirements for various components. Bidder is expected to give a comprehensive compliance sheet for the Product and services proposed by them. The Format to be used for the compliance.

All above mentioned documents shall have an index page with page numbers specified for all the key information / headers.

**IMPORTANT NOTE:** The Bidders shall submit the Technical Solution Proposed and compliance to the minimum specifications for the Project. The Bids submitted without these documents are liable to be rejected. The Technical/Evaluation Committee's decision shall be final and binding on all formats for submitting details on experience of Bidder.



#### **ANNEXURE 4 – FORMAT OF BID SECURITY/EMD**

Bidders are required to deposit *e-EMD (RTGS / NEFT)*, of prescribed amount, online along with the technical bid.

## ANNEXURE 5 – FORMAT OF PERFORMANCE SECURITY

### Performance Bank Guarantee

[On Appropriate Stamp Paper]

To,

**EXECUTIVE DIRECTOR  
UJJAIN SMART CITY LIMITED  
UJJAIN**

WHEREAS:

- A. \_\_\_\_\_ [name and address of System Integrator] (hereinafter called the "System Integrator") and Ujjain Smart City Limited, \_\_\_\_\_, (hereinafter called the "Employer") have entered into an agreement (hereinafter called the "Agreement") for the ***"Establishment and O&M of Integrated Command & Control Centre (ICCC) for Simhastha Kumbh Mela 2028"*** in the state of Madhya Pradesh on online lumpsum-item rate (the "lumpsum-item rate") basis, subject to and in accordance with the provisions of the Agreement.
- B. The Agreement requires the System Integrator to furnish a Performance Security for due and faithful performance of its obligations, under and in accordance with the Agreement, during the {Execution Period, Defects Liability Period and Operation & Maintenance Period} (as defined in the Agreement) in a sum of Rs..... Cr. (Rupees ..... Crore) (the "Guarantee Amount").
- C. We, ..... through our branch at ..... (the "Bank") have agreed to furnish this bank guarantee (hereinafter called the "Guarantee") by way of Performance Security.

NOW, THEREFORE, the Bank hereby, unconditionally and irrevocably, guarantees and affirms as follows:

1. The Bank hereby unconditionally and irrevocably guarantees the due and faithful performance of the System Integrator's obligations during the {Execution Period/ Defects Liability Period and Operation & Maintenance Period} under and in accordance with the Agreement, and agrees and undertakes to pay to the Employer, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the System Integrator, such sum or sums up to an aggregate sum of the Guarantee Amount as the Employer shall claim, without the Employer being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.
2. A letter from the Employer, under the hand of an officer not below the rank of Chief Executive Officer in the Ujjain Smart City Limited, that the System Integrator has committed default in the due and faithful performance of all or any of its obligations under and in accordance with the Agreement shall be conclusive, final and binding on the Bank. The Bank further agrees that the Employer shall be the sole judge as to whether the System Integrator is in default in due and faithful performance of its obligations during and under the Agreement and its decision that the System Integrator is in default shall be final and binding on the Bank, notwithstanding any differences between the Employer and the System Integrator, or any dispute between them

- pending before any court, tribunal, arbitrators or any other employer or body, or by the discharge of the System Integrator for any reason whatsoever.
3. In order to give effect to this Guarantee, the Employer shall be entitled to act as if the Bank were the principal debtor and any change in the constitution of the System Integrator and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.
  4. It shall not be necessary, and the Bank hereby waives any necessity, for the Employer to proceed against the System Integrator before presenting to the Bank its demand under this Guarantee.
  5. The Employer shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Agreement or to extend the time or period for the compliance with, fulfillment and/ or three of all or any of the obligations of the System Integrator contained in the Agreement or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Employer against the System Integrator, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Employer, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Employer of the liberty with reference to the matters aforesaid or by reason of time being given to the System Integrator or any other forbearance, indulgence, act or omission on the part of the Employer or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.
  6. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Employer in respect of or relating to the Agreement or for the fulfillment, compliance and/or performance of all or any of the obligations of the System Integrator under the Agreement.
  7. Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 8 below and unless a demand or claim in writing is made by the Employer on the Bank under this Guarantee all rights of the Employer under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.
  8. The Guarantee shall cease to be in force and effect on \*\*\*\*\$. Unless a demand or claim under this Guarantee is made in writing before expiry of the Guarantee, the Bank shall be discharged from its liabilities hereunder.
  9. The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Employer in writing and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.
  10. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred branch, which shall be deemed to have been duly authorised to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Employer that the envelope was so posted shall be conclusive.
  11. This Guarantee shall come into force with immediate effect and shall remain in force and effect for up to the date specified in paragraph 8 above or until it is released earlier by the Employer pursuant to the provisions of the Agreement.



12. This guarantee shall also be operatable at our..... Branch at <.....>, from whom, confirmation regarding the issue of this guarantee or extension / renewal thereof shall be made available on demand. In the contingency of this guarantee being invoked and payment thereunder claimed, the said branch shall accept such invocation letter and make payment of amounts so demanded under the said invocation.

Signed and sealed this ..... day of ....., 2026 at .....

SIGNED, SEALED AND DELIVERED

For and on behalf of the Bank by:

(Signature)

(Name)

(Designation)

(Code Number)

(Address)

NOTES:

- (i) The bank guarantee should contain the name, designation and code number of the officer(s) signing the guarantee.
- (ii) The address, telephone number and other details of the head office of the Bank as well as of issuing branch should be mentioned on the covering letter of issuing branch.

## ANNEXURE 6 – FORMAT FOR CONSORTIUM AGREEMENT

(On Non-judicial stamp paper of INR 100 duly attested by notary public)

This Memorandum of Understanding (MoU) entered into this day of [Date] [Month] 2026 at [Place] among (hereinafter referred to as " \_") and having office at [Address], India, as Party of the First Part and (hereinafter referred to as " \_") and having office at [Address], as Party of the Second Part and (hereinafter referred to as " ||") and having office at [Address], as Party of the Third Part.

The parties are individually referred to as Party and collectively as Parties.

WHEREAS DIT, Govt. of [state] has issued a Request for Proposal dated [Date] (RFP) from the Applicants interested in **Selection of System Integrator (SI) for Establishment and O&M of Integrated Command & Control Centre (ICCC) for Simhashta Kumbh Mela 2028**:

AND WHEREAS the Parties have had discussions for formation of a Consortium for bidding for the said Project and have reached an understanding on the following points with respect to the Parties' rights and obligations towards each other and their working relationship.

AS MUTUAL UNDERSTANDING OF THE PARTIES, IT IS HEREBY AGREED AND

DECLARED AS FOLLOWS:

- i. The purpose of this Agreement is to define the principles of collaboration among the Parties to:
  - a. Submit a response jointly to Bid for the — **Selection of System Integrator (SI) for Establishment and O&M of Integrated Command & Control Centre (ICCC) for Simhashta Kumbh Mela 2028** as a Consortium.
  - b. Sign Contract in case of award.
  - c. Provide and perform the supplies and services which would be ordered by the Purchaser pursuant to the Contract.
- ii. This Agreement shall not be construed as establishing or giving effect to any legal entity such as, but not limited to, a company, a partnership, etc. It shall relate solely towards the Purchaser for — **Selection of System Integrator (SI) for Establishment and O&M of Integrated Command & Control Centre (ICCC) for Simhashta Kumbh Mela 2028** for and related execution works to be performed pursuant to the Contract and shall not extend to any other activities.
- iii. The Parties shall be jointly and severally responsible and bound towards the Purchaser for the performance of the works in accordance with the terms and conditions of the BID document, and Contract.
- iv. ----- (Name of Party) shall act as Lead Partner of the Consortium. As such, it shall act as the coordinator of the Party's combined activities and shall carry out the following functions:
  - a. To ensure the technical, commercial and administrative co-ordination of the work package
  - b. To lead the contract negotiations of the work package with the Purchaser.
  - c. The Lead partner is authorized to receive instructions and incur liabilities for and on behalf of all Parties.

d. In case of an award, act as channel of communication between the Purchaser and the Parties to execute the Contract

v. That the Parties shall carry out all responsibilities as Developer in terms of the Project Agreement.

vi. That the broad roles and the responsibilities of each Party at each stage of the Bidding shall be as below:

Party A: .....

Party B: .....

Party C: .....

vii. That the broad roles and the responsibilities of each Party at each stage of the Project Execution shall be as below:

Party A: .....

Party B: .....

Party C: .....

viii. That the Parties affirm that they shall implement the Project in good faith and shall take all necessary steps to see the Project through expeditiously.

ix. That this MoU shall be governed in accordance with the laws of India and courts in [state] shall have exclusive jurisdiction to adjudicate disputes arising from the terms herein.

In witness whereof the Parties affirm that the information provided is accurate and true and have caused this MoU duly executed on the date and year above mentioned.

**(Party of the first part)**

**(Party of the second part)**

**(Party of the third part)**

**Witness:**

i. ....

ii. ....

## Overview of Proposed Solution

### Structure of Proposed Solution

Bidders are required to provide a detailed approach & methodology to execute the entire project. Bidders are advised to comply with the below provided headers/Approach components while detailing out their solution.

| Sl. No | Items                                                                                                                                                                                                                                                     |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1      | Understanding of the project and conformity to Scope of Work, Functional Requirement and System Architecture of the proposed solution as per requirements of the RFP                                                                                      |
| 2      | Proposed network and deployment architecture to meet the functionalities as given in RFP                                                                                                                                                                  |
| 3      | Proposed security solution to safeguard against various threats including hacking attempts, cyber-crime, internal/ external threats etc.                                                                                                                  |
| 4      | Proposed solution for design & development of SOPs and KPIs                                                                                                                                                                                               |
| 5      | Methodology, tools and Technologies to monitor & maintain all the SLAs and managing change requests                                                                                                                                                       |
| 6      | Proposed structure for:<br>a. Project Strategy<br>b. Solution Document<br>c. Project Management<br>d. Resource Plan<br>e. OEM approvals<br>f. Procurement Plan<br>e. Installation Plan (Permanent/rental infrastructure)                                  |
| 7      | Approach towards testing and quality assurance                                                                                                                                                                                                            |
| 8      | Proposed solution ensures the fool proof security to the system from various threats including hacking attempts, internal threats, etc. Please explain in detail approach towards the security of the overall solution from external and internal threats |
| 9      | Assessment of Manpower deployment, Training and Handholding plan<br>Deployment strategy of Manpower<br>Mobilization of existing resources and additional resources as required<br>Training and handholding strategy                                       |

## **ANNEXURE – 7: INTEGRITY PACT**

### **Integrity Pact**

This Integrity Pact ("Pact") is entered into on this \_\_\_\_ day of \_\_\_\_\_ 2026.

#### **BETWEEN**

**Ujjain Smart City Limited (USCL)**, having its office at \_\_\_\_\_, acting through its authorized representative (hereinafter referred to as the "Authority", which expression shall unless repugnant to the context or meaning thereof include its successors and assigns)

#### **AND**

M/s \_\_\_\_\_, a company/firm incorporated under the laws of India and having its registered office at \_\_\_\_\_ (hereinafter referred to as the "Bidder/Contractor", which expression shall unless repugnant to the context or meaning thereof include its successors, permitted assigns, consortium members, affiliates, representatives and agents).

The Authority and the Bidder/Contractor are hereinafter collectively referred to as the "Parties".

#### **1. PURPOSE**

The purpose of this Integrity Pact is to ensure transparency, fairness, ethical conduct, and prevention of corruption in the bidding, award, implementation, operation, and maintenance of the Project.

#### **2. COMMITMENTS OF THE BIDDER / CONTRACTOR**

The Bidder/Contractor commits that

**2.1** It shall not directly or indirectly offer, promise, give, solicit, or accept any bribe, gratification, gift, commission, kickback, facilitation payment, or undue advantage in connection with the bidding process or execution of the Contract.

**2.2** It shall not engage in collusive bidding, bid rigging, cartelization, anti-competitive conduct, coercive practices, or fraudulent activities.

**2.3** It shall disclose any payments, commissions, fees, or arrangements made with agents, consultants, intermediaries, or third parties in connection with the Project.

**2.4** It shall not manipulate documents, submit forged certificates, furnish false credentials, or provide misleading information.

**2.5** It shall maintain complete transparency in pricing, technical submissions, OEM relationships, and consortium arrangements.

#### **3. COMMITMENTS OF THE AUTHORITY**

The Authority commits that

**3.1** It shall ensure transparent procedures, fair evaluation, equal opportunity, and non-discriminatory treatment to all bidders.

**3.2** Its officials shall not demand, solicit, or accept any undue benefit from bidders/contractors.

**3.3** Any official found violating integrity principles shall be liable for disciplinary/legal action as per applicable rules.

#### **4. CONFLICT OF INTEREST**

The Bidder/Contractor shall disclose any actual conflict, potential conflict, related-party relationship, or beneficial interest which may affect fairness or transparency of the Project.

#### **5. REPORTING OF VIOLATIONS**

The Bidder/Contractor may report any suspected corruption, unethical practice, coercion, or misconduct to the Authority through designated channels.

#### **6. VIOLATION & CONSEQUENCES**

If the Authority determines that the Bidder/Contractor has violated this Pact, the Authority may take one or more actions including rejection of bid, forfeiture of EMD/PBG, termination of contract, recovery of losses, blacklisting/debarment, suspension from future tenders, and legal/criminal proceedings.

#### **7. INDEPENDENT EXTERNAL MONITOR**

The Authority may appoint Independent External Monitor(s) (IEMs) for oversight of integrity compliance under this Pact.

The Bidder/Contractor shall extend full cooperation to such IEM(s).

#### **8. VALIDITY**

This Pact shall remain valid during the bidding process, throughout execution of the Contract, during O&M period, and until final closure of contractual obligations.

#### **9. GOVERNING LAW & JURISDICTION**

This Pact shall be governed by laws of India.

Courts at Ujjain / Madhya Pradesh shall have jurisdiction.

#### **10. SIGNATURES**

For and on behalf of  
Ujjain Smart City Limited

Name: \_\_\_\_\_  
Designation: \_\_\_\_\_  
Signature: \_\_\_\_\_  
Seal

For and on behalf of Bidder/Contractor

Name: \_\_\_\_\_  
Designation: \_\_\_\_\_  
Signature: \_\_\_\_\_  
Seal

Witnesses:

1. \_\_\_\_\_

2. \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

## **ANNEXURE – 8: NON-DISCLOSURE AGREEMENT (NDA)**

### **Non-Disclosure Agreement**

This Non-Disclosure Agreement (“Agreement”) is executed on this \_\_\_\_ day of \_\_\_\_\_ 2026.

#### **BETWEEN**

**Ujjain Smart City Limited (USCL)**, having its office at \_\_\_\_\_ (hereinafter referred to as the “Disclosing Party” or “Authority”)

AND

M/s \_\_\_\_\_, having its registered office at \_\_\_\_\_ (hereinafter referred to as the “Receiving Party” or “Bidder/SI”).

The Authority and Bidder/SI are collectively referred to as the “Parties”.

#### **1. PURPOSE**

The purpose of this Agreement is to protect confidential and sensitive information shared in connection with bidding, evaluation, implementation, operation, maintenance, and management of the ICCC Project for Simhastha 2028, Ujjain.

#### **. CONFIDENTIAL INFORMATION**

“Confidential Information” shall include, but not be limited to surveillance architecture, network diagrams, ICCC layouts, security configurations, operational procedures, video feeds, analytics outputs, AI models, Digital Twin datasets, GIS layers, credentials, passwords, reports, source code, APIs, and any information marked or reasonably understood as confidential.

#### **3. OBLIGATIONS OF RECEIVING PARTY**

The Receiving Party shall

**3.1:** Maintain strict confidentiality of all Confidential Information.

**3.2** Use Confidential Information solely for purposes related to the Project.

**3.3** Not disclose Confidential Information to any third party without prior written approval of the Authority.

**3.4** Restrict access to Confidential Information only to authorized personnel, employees, consortium members, subcontractors, or consultants having legitimate project-related requirement and bound by similar confidentiality obligations.

**3.5** Protect Confidential Information with reasonable degree of care and security safeguards.

#### **4. PROHIBITED ACTIONS**

The Receiving Party shall not copy, reproduce, distribute, publish, reverse engineer, commercially exploit, transfer, or misuse Confidential Information without written approval of the Authority.

#### **5. CYBERSECURITY & DATA PROTECTION**



The Receiving Party shall implement secure access controls, encryption, audit logging, cybersecurity safeguards, and secure storage mechanisms for protection of Confidential Information.

## **6. EXCLUSIONS**

Confidential Information shall not include information which is already in public domain, becomes public without breach of this Agreement, is lawfully received from third party, or is independently developed without use of Confidential Information.

## **7. DISCLOSURE UNDER LAW**

If disclosure is required under law, court order, regulatory requirement, or Government direction, the Receiving Party shall promptly notify the Authority before such disclosure wherever legally permissible.

## **8. OWNERSHIP OF INFORMATION**

All Confidential Information shall remain sole property of the Authority.

No license, ownership, or intellectual property rights are transferred under this Agreement except limited usage rights expressly permitted.

## **9. RETURN / DESTRUCTION OF INFORMATION**

Upon completion of Project, termination, expiry, or demand by Authority, the Receiving Party shall return, destroy, or securely erase all Confidential Information and certify compliance.

## **10. BREACH & REMEDIES**

Any breach of this Agreement may result in termination of contract, forfeiture of EMD/PBG, damages, blacklisting/debarment, injunctive relief, and legal/criminal proceedings.

## **11. SURVIVAL**

Confidentiality obligations shall survive completion, expiry, or termination of the Contract for a minimum period of 5 years or as required under applicable laws/policies.

## **12. GOVERNING LAW & JURISDICTION**

This Agreement shall be governed by laws of India.

Courts at Ujjain / Madhya Pradesh shall have exclusive jurisdiction.

## **13. SIGNATURES**

For and on behalf of  
Ujjain Smart City Limited

Name: \_\_\_\_\_

Designation: \_\_\_\_\_

Signature: \_\_\_\_\_

Seal

For and on behalf of Bidder / System Integrator

Name: \_\_\_\_\_

Designation: \_\_\_\_\_

Signature: \_\_\_\_\_

Seal

Witnesses:

1. \_\_\_\_\_
- 2.

## ANNEXURE 9: OEM AUTHORIZATION FORMAT

### (Manufacturer's Authorization Form)

*(This form has to be provided by the OEMs of the hardware and software solutions proposed. This letter should be on the letterhead of the manufacturer and should be signed by a person competent and having the power of attorney to bind the manufacturer)*

Date: <dd/mm/yyyy>

To,  
Executive Director  
Ujjain Smart City Limited  
Ujjain

Subject: Establishment and O&M of Integrated Command & Control Centre (ICCC) for Simhastha Kumbh Mela 2028 - Manufacturer's Authorization Form regarding

Ref: RFP No :<No> Dated<DD/MM/YYYY>

Dear Sir,

We \_\_\_\_\_ (Name of the OEM) who are established and reputable manufacturers of (List of Goods) having factories or product development centers at the locations or as per list attached, do hereby authorize \_\_\_\_\_ (Name and address of the Bidder) to bid, negotiate and conclude the contract with you against RFP No. \_\_\_\_\_  
Dated \_\_\_\_\_ for the above goods manufactured or developed by us.

We hereby extend, our warranty for the hardware goods supplied by the bidder and or maintenance or support services for software products against this invitation for bid by \_\_\_\_\_  
(Name of the Bidder) as per requirements of this RFP

Thanking you,  
Yours faithfully,

(Signature)  
For and on behalf of (Name of the OEM)

Authorised Signatory

Name:

Designation:

Place:

Date:

## ANNEXURE 10: MASTER COMPLIANCE MATRIX

### Instructions to Bidders

1. The Bidder shall provide detailed compliance against all requirements specified in the RFP including functional requirements, technical specifications, architecture requirements, cybersecurity requirements, implementation obligations, SLA requirements, and O&M requirements.
2. Compliance shall be provided against each clause/requirement.
3. The Bidder shall clearly indicate “Complied”, “Partially Complied”, or “Not Complied”.
4. Mere statement such as “Yes”, “Understood”, “Will Comply”, or copy-paste of RFP text shall not be considered sufficient compliance.
5. The Bidder shall provide offered specifications, deviations (if any), OEM details, and documentary references.
6. Any deviation not specifically disclosed in this Compliance Matrix may be treated as deemed compliance by the Bidder.
7. The Authority reserves the right to seek clarifications, reject vague/incomplete compliance, verify claims, and disqualify non-compliant proposals.
8. Compliance Matrix shall be supported with OEM datasheets, brochures, architecture documents, certifications, and supporting technical documents.

### A. GENERAL COMPLIANCE MATRIX

| SNo | RFP Section / Clause No. | Requirement Description | Bidder Compliance (Complied / Partially Complied / Not Complied) | Offered Solution / Compliance Details | Deviation, if any | Supporting Document Reference |
|-----|--------------------------|-------------------------|------------------------------------------------------------------|---------------------------------------|-------------------|-------------------------------|
| 1   |                          |                         |                                                                  |                                       |                   |                               |
| 2   |                          |                         |                                                                  |                                       |                   |                               |
| 3   |                          |                         |                                                                  |                                       |                   |                               |

### B. SURVEILLANCE SYSTEM COMPLIANCE MATRIX

| SNo | Component       | Minimum Requirement | Compliance Status | Offered Specification | OEM / Make/ Model | Deviation, if any | Datasheet Reference |
|-----|-----------------|---------------------|-------------------|-----------------------|-------------------|-------------------|---------------------|
| 1   | Fixed IP Camera | As per RFP          |                   |                       |                   |                   |                     |
| 2   | PTZ Camera      | As per RFP          |                   |                       |                   |                   |                     |

|   |                                |            |  |  |  |  |  |
|---|--------------------------------|------------|--|--|--|--|--|
| 3 | Panoramic Camera               | As per RFP |  |  |  |  |  |
| 4 | Thermal Camera                 | As per RFP |  |  |  |  |  |
| 5 | ANPR Camera                    | As per RFP |  |  |  |  |  |
| 6 | Body-Worn Camera               | As per RFP |  |  |  |  |  |
| 7 | Dash Camera                    | As per RFP |  |  |  |  |  |
| 8 | Underwater Surveillance Camera | As per RFP |  |  |  |  |  |
| 9 | Drone Integration              | As per RFP |  |  |  |  |  |

#### C. VIDEO MANAGEMENT SYSTEM (VMS) COMPLIANCE MATRIX

| SNo | Requirement               | Compliance Status | Offered Specification / Feature | Deviation, if any | Supporting Reference |
|-----|---------------------------|-------------------|---------------------------------|-------------------|----------------------|
| 1   | Enterprise VMS Platform   |                   |                                 |                   |                      |
| 2   | Multi-OEM Integration     |                   |                                 |                   |                      |
| 3   | ONVIF Compliance          |                   |                                 |                   |                      |
| 4   | GIS Integration           |                   |                                 |                   |                      |
| 5   | AI Analytics Integration  |                   |                                 |                   |                      |
| 6   | Redundancy & Failover     |                   |                                 |                   |                      |
| 7   | Role-Based Access Control |                   |                                 |                   |                      |
| 8   | Mobile Access             |                   |                                 |                   |                      |
| 9   | Edge Recording Support    |                   |                                 |                   |                      |
| 10  | Scalability               |                   |                                 |                   |                      |

#### D. AI ANALYTICS PLATFORM COMPLIANCE MATRIX

| SNo | Requirement              | Compliance Status | Offered Feature / Methodology | Deviation, if any | Supporting Reference |
|-----|--------------------------|-------------------|-------------------------------|-------------------|----------------------|
| 1   | Crowd Density Analytics  |                   |                               |                   |                      |
| 2   | Heatmaps                 |                   |                               |                   |                      |
| 3   | Reverse Flow Detection   |                   |                               |                   |                      |
| 4   | Queue Analytics          |                   |                               |                   |                      |
| 5   | Congestion Alerts        |                   |                               |                   |                      |
| 6   | Fire/Smoke Detection     |                   |                               |                   |                      |
| 7   | Predictive Analytics     |                   |                               |                   |                      |
| 8   | Dashboard Integration    |                   |                               |                   |                      |
| 9   | GIS Integration          |                   |                               |                   |                      |
| 10  | Digital Twin Integration |                   |                               |                   |                      |

#### E. DIGITAL TWIN PLATFORM COMPLIANCE MATRIX

| SNo. | Requirement              | Compliance Status | Offered Capability | Deviation, if any | Supporting Reference |
|------|--------------------------|-------------------|--------------------|-------------------|----------------------|
| 1    | 2D/3D GIS Visualization  |                   |                    |                   |                      |
| 2    | Real-Time Data Ingestion |                   |                    |                   |                      |
| 3    | Crowd Simulation         |                   |                    |                   |                      |
| 4    | Congestion Forecasting   |                   |                    |                   |                      |
| 5    | Evacuation Modelling     |                   |                    |                   |                      |
| 6    | Traffic Simulation       |                   |                    |                   |                      |
| 7    | SOP-Based Alerts         |                   |                    |                   |                      |
| 8    | Scenario Simulation      |                   |                    |                   |                      |
| 9    | Dashboard Integration    |                   |                    |                   |                      |

|    |                       |  |  |  |  |
|----|-----------------------|--|--|--|--|
| 10 | API-Based Integration |  |  |  |  |
|----|-----------------------|--|--|--|--|

#### F. COMMUNICATION NETWORK COMPLIANCE MATRIX

| SNo. | Component               | Requirement | Compliance Status | Offered Specification | Deviation | Supporting Reference |
|------|-------------------------|-------------|-------------------|-----------------------|-----------|----------------------|
| 1    | OFC Backbone            |             |                   |                       |           |                      |
| 2    | Field Switches          |             |                   |                       |           |                      |
| 3    | Core Switches           |             |                   |                       |           |                      |
| 4    | Wireless/RF Links       |             |                   |                       |           |                      |
| 5    | Radio/Wireless System   |             |                   |                       |           |                      |
| 6    | Redundancy Architecture |             |                   |                       |           |                      |
| 7    | QoS Support             |             |                   |                       |           |                      |
| 8    | Network Monitoring      |             |                   |                       |           |                      |

#### G. DATA CENTER / STORAGE / DR COMPLIANCE MATRIX

| SNo. | Requirement            | Compliance Status | Offered Specification | Deviation | Supporting Reference |
|------|------------------------|-------------------|-----------------------|-----------|----------------------|
| 1    | Compute Infrastructure |                   |                       |           |                      |
| 2    | Virtualization         |                   |                       |           |                      |
| 3    | GPU Support            |                   |                       |           |                      |
| 4    | Storage Architecture   |                   |                       |           |                      |
| 5    | Video Retention        |                   |                       |           |                      |
| 6    | Backup Mechanism       |                   |                       |           |                      |
| 7    | Disaster Recovery      |                   |                       |           |                      |
| 8    | Failover Support       |                   |                       |           |                      |
| 9    | Monitoring Systems     |                   |                       |           |                      |

#### H. ICCC / WAR-ROOM / VIEWING CENTER COMPLIANCE MATRIX

| SNo. | Requirement | Compliance Status | Offered Specification | Deviation | Supporting Reference |
|------|-------------|-------------------|-----------------------|-----------|----------------------|
|------|-------------|-------------------|-----------------------|-----------|----------------------|

|   |                       |  |  |  |  |
|---|-----------------------|--|--|--|--|
| 1 | ICCC Setup            |  |  |  |  |
| 2 | Video Wall            |  |  |  |  |
| 3 | Operator Consoles     |  |  |  |  |
| 4 | AV Systems            |  |  |  |  |
| 5 | Mini War-Room         |  |  |  |  |
| 6 | Viewing Centers       |  |  |  |  |
| 7 | Dashboard Integration |  |  |  |  |
| 8 | Collaboration Systems |  |  |  |  |

#### I. CYBERSECURITY COMPLIANCE MATRIX

| SNo. | Requirement        | Compliance Status | Offered Solution | Deviation | Supporting Reference |
|------|--------------------|-------------------|------------------|-----------|----------------------|
| 1    | Firewall           |                   |                  |           |                      |
| 2    | IDS/IPS            |                   |                  |           |                      |
| 3    | SIEM Integration   |                   |                  |           |                      |
| 4    | MFA                |                   |                  |           |                      |
| 5    | Encryption         |                   |                  |           |                      |
| 6    | Audit Logging      |                   |                  |           |                      |
| 7    | VAPT               |                   |                  |           |                      |
| 8    | CERT-In Compliance |                   |                  |           |                      |

#### J. FIELD INFRASTRUCTURE COMPLIANCE MATRIX

| SNo. | Component                           | Compliance Status | Offered Specification | Deviation | Supporting Reference |
|------|-------------------------------------|-------------------|-----------------------|-----------|----------------------|
| 1    | Poles & Mounting Structures         |                   |                       |           |                      |
| 2    | Outdoor Cabinets                    |                   |                       |           |                      |
| 3    | UPS Systems                         |                   |                       |           |                      |
| 4    | Earthing & Lightning Protection     |                   |                       |           |                      |
| 5    | Power Infrastructure                |                   |                       |           |                      |
| 6    | Temporary Deployment Infrastructure |                   |                       |           |                      |

#### K. SLA & O&M COMPLIANCE MATRIX



| SNo. | Requirement                                | Compliance Status | Offered SLA / Methodology | Deviation | Supporting Reference |
|------|--------------------------------------------|-------------------|---------------------------|-----------|----------------------|
| 1    | 60 Months O&M for Permanent Infrastructure |                   |                           |           |                      |
| 2    | 9 Months O&M for Rental Infrastructure     |                   |                           |           |                      |
| 3    | Preventive Maintenance                     |                   |                           |           |                      |
| 4    | Corrective Maintenance                     |                   |                           |           |                      |
| 5    | Helpdesk Support                           |                   |                           |           |                      |
| 6    | Spare Management                           |                   |                           |           |                      |
| 7    | Incident Response Timelines                |                   |                           |           |                      |
| 8    | Peak Snan Day Support                      |                   |                           |           |                      |

#### L. IMPLEMENTATION & TESTING COMPLIANCE MATRIX

| SNo | Requirement              | Compliance Status | Offered Methodology | Deviation | Supporting Reference |
|-----|--------------------------|-------------------|---------------------|-----------|----------------------|
| 1   | Implementation Schedule  |                   |                     |           |                      |
| 2   | FAT/SAT/UAT              |                   |                     |           |                      |
| 3   | Trial Runs               |                   |                     |           |                      |
| 4   | Simulation Exercises     |                   |                     |           |                      |
| 5   | Failover Testing         |                   |                     |           |                      |
| 6   | Multi-Agency Mock Drills |                   |                     |           |                      |

#### M. DEVIATION STATEMENT

The Bidder shall clearly specify all deviations from RFP requirements.

| SNo. | RFP Clause Reference | Description of Deviation | Justification |
|------|----------------------|--------------------------|---------------|
| 1    |                      |                          |               |
| 2    |                      |                          |               |

If no deviations are proposed, the Bidder shall explicitly state:

“We hereby confirm that our proposal is fully compliant with all terms, conditions, technical specifications, functional requirements, SLA requirements, and contractual obligations specified in the RFP. No deviations are proposed.”

#### N. BIDDER UNDERTAKING

We hereby certify that:

*Establishment and O&M of Integrated Command & Control Centre (ICCC) for Simhastha Kumbh Mela 2028*

- all information furnished in this Compliance Matrix is true and correct;
- the offered solution complies with the RFP requirements except specifically disclosed deviations;
- all supporting documents submitted are genuine;
- and the Authority may verify any claim/document submitted by us.

Authorized Signatory

Name: \_\_\_\_\_

Designation: \_\_\_\_\_

Bidder Name: \_\_\_\_\_

Signature: \_\_\_\_\_

Seal: \_\_\_\_\_

# Ujjain Smart City Limited



Request for Proposal for

**Selection of System Integrator (SI) for**

**Establishment and O&M of Integrated Command & Control Centre (ICCC) for  
Simhastha Kumbh Mela 2028**

**Volume – 2: Detailed Scope of Work and Technical Specifications**

NIT No. USCL/430

Tender ID: 2026\_UAD\_508730\_1 Ujjain Date: 20/05/2026

.....

**Ujjain Smart City Limited  
Simhastha Mela Office, Kothi Road,  
Ujjain, Madhya Pradesh – 456010**

## **Establishment and O&M of Integrated Command & Control Centre (ICCC) for Simhashta Kumbh Mela 2028**

### **VOLUMES STRUCTURE OF RFP DOCUMENTS**

| <b>Volume</b> | <b>Contents</b>                                    |
|---------------|----------------------------------------------------|
| Volume-I      | Instructions to Bidders and Bid Process Management |
| Volume-II     | Scope of Work & Technical Specifications           |
| Volume-III    | Draft Contract Agreement & SLA                     |
| Volume-IV     | Financial Bid / BOQ                                |

## Volume – 2: Scope of Work & Technical Specifications

### TABLE OF CONTENTS

| Section No.      | Section Title                                                                |
|------------------|------------------------------------------------------------------------------|
| <b>Section 1</b> | <b>Project Background &amp; Objectives</b>                                   |
| 1.1              | Background                                                                   |
| 1.2              | Project Vision                                                               |
| 1.3              | Project Objectives                                                           |
| 1.4              | Project Scope Overview                                                       |
| 1.5              | Guiding Principles                                                           |
| 1.6              | Implementation Approach                                                      |
| <b>Section 2</b> | <b>Scope of Work</b>                                                         |
| 2.1              | Overview                                                                     |
| 2.2              | Broad Scope of Services                                                      |
| 2.3              | Detailed Scope of Work                                                       |
| 2.3.1            | Survey, Planning & Detailed Design                                           |
| 2.3.2            | Supply, Installation & Commissioning of Surveillance Infrastructure          |
| 2.3.3            | ICCC Establishment                                                           |
| 2.3.4            | AI-Based Video Analytics Platform                                            |
| 2.3.5            | Digital Twin & Decision Intelligence Platform                                |
| 2.3.6            | Communication Network Infrastructure                                         |
| 2.3.7            | Field Infrastructure                                                         |
| 2.3.8            | Data Center, Storage & Disaster Recovery                                     |
| 2.3.9            | Video Management System (VMS)                                                |
| 2.3.10           | Cybersecurity Implementation                                                 |
| 2.3.11           | Limited Enterprise Event Communication System (Radio/Wireless Communication) |
| 2.3.12           | Public Communication & Citizen Interface Systems                             |
| 2.3.13           | Drone Surveillance Integration                                               |
| 2.3.14           | Integration with Existing and Third-Party Systems                            |
| 2.3.15           | Testing, Trial Runs & Acceptance                                             |
| 2.3.16           | Training & Capacity Building                                                 |
| 2.3.17           | Operations & Maintenance (O&M)                                               |
| 2.3.17.1         | Utility Power Supply & Electricity Charges                                   |
| 2.3.18           | Documentation & Knowledge Transfer                                           |

|                  |                                                   |
|------------------|---------------------------------------------------|
| 2.4              | Responsibility of the SI                          |
| 2.5              | Exclusions                                        |
| 2.6              | General Requirements                              |
| <b>Section 3</b> | <b>ICCC Architecture</b>                          |
| 3.1              | Overall Architectural Philosophy                  |
| 3.2              | The Six-Layer Architecture                        |
| 3.2.1            | Layer 1: Field Data Acquisition Layer             |
| 3.2.2            | Layer 2: Edge Processing & Connectivity Layer     |
| 3.2.3            | Layer 3: Integration & Data Management Layer      |
| 3.2.4            | Layer 4: AI Analytics & Digital Twin Layer        |
| 3.2.5            | Layer 5: Decision Support & Application Layer     |
| 3.2.6            | Layer 6: Command & Control Layer (ICCC)           |
| 3.3              | Cross-Cutting Layers                              |
| 3.4              | Architecture Flow                                 |
| <b>Section 4</b> | <b>Surveillance &amp; Crowd Management System</b> |
| 4.1              | Overview                                          |
| 4.2              | Camera Systems                                    |
| 4.2.1            | General Requirements                              |
| 4.2.2            | Coverage Requirements                             |
| 4.2.3            | Fixed / Bullet / Box Cameras                      |
| 4.2.4            | PTZ Cameras                                       |
| 4.2.5            | Panoramic / 360° Cameras                          |
| 4.2.6            | Thermal Cameras                                   |
| 4.2.7            | Edge AI Enabled Cameras                           |
| 4.2.8            | Camera Deployment Philosophy                      |
| 4.2.9            | Video Retention                                   |
| 4.2.10           | Camera Health Monitoring                          |
| 4.3              | Automatic Number Plate Recognition (ANPR)         |
| 4.4              | Body Cameras and Dash Cameras                     |
| 4.5              | Drone Integration                                 |
| 4.6              | Water Surveillance                                |
| 4.7              | Private CCTV Integration                          |
| <b>Section 5</b> | <b>Video Management System (VMS)</b>              |
| 5.1              | Overview                                          |

|                  |                                                          |
|------------------|----------------------------------------------------------|
| 5.2              | General Requirements                                     |
| 5.3              | Functional Requirements                                  |
| 5.4              | Technical Requirements                                   |
| 5.5              | Video Storage & Archival                                 |
| 5.6              | Health Monitoring & Diagnostics                          |
| 5.7              | Cybersecurity Requirements                               |
| 5.8              | Reporting & Analytics                                    |
| 5.9              | Mobile & Remote Access                                   |
| 5.10             | Integration Requirements                                 |
| 5.11             | Testing & Acceptance                                     |
| 5.12             | OEM & Support Requirements                               |
| 5.13             | SLA Requirements                                         |
| 5.14             | Future Readiness                                         |
| <b>Section 6</b> | <b>AI Analytics Platform</b>                             |
| 6.1              | Overview                                                 |
| 6.2              | Objectives                                               |
| 6.3              | General Requirements                                     |
| 6.4              | Core Functional Modules                                  |
| 6.5              | Predictive Analytics & Decision Support                  |
| 6.6              | GIS & Digital Twin Integration                           |
| 6.7              | Alert Management System                                  |
| 6.8              | AI Model Requirements                                    |
| 6.9              | Performance Requirements                                 |
| 6.10             | Dashboard & Visualization                                |
| 6.11             | Cybersecurity & Data Protection                          |
| 6.12             | Integration Requirements                                 |
| 6.13             | Testing & Acceptance                                     |
| 6.14             | Training & Knowledge Transfer                            |
| 6.15             | OEM & Support Requirements                               |
| 6.16             | SLA Requirements                                         |
| 6.17             | Future Readiness                                         |
| <b>Section 7</b> | <b>Digital Twin &amp; Decision Intelligence Platform</b> |
| 7.1              | Overview                                                 |
| 7.2              | Objectives                                               |

|                   |                                                                 |
|-------------------|-----------------------------------------------------------------|
| 7.3               | General Requirements                                            |
| 7.4               | GIS & Geospatial Visualization                                  |
| 7.5               | Real-Time Data Ingestion & Correlation                          |
| 7.6               | Crowd Simulation & Predictive Analytics                         |
| 7.7               | Traffic & Mobility Intelligence                                 |
| 7.8               | Emergency Response & Disaster Management                        |
| 7.9               | Decision Intelligence Engine                                    |
| 7.10              | Social Media & External Intelligence Integration                |
| 7.11              | Dashboard & Visualization                                       |
| 7.12              | Reporting & Analytics                                           |
| 7.13              | Performance Requirements                                        |
| 7.14              | Cybersecurity & Data Protection                                 |
| 7.15              | Integration Requirements                                        |
| 7.16              | Testing & Acceptance                                            |
| 7.17              | Training & Capacity Building                                    |
| 7.18              | OEM & Support Requirements                                      |
| 7.19              | SLA Requirements                                                |
| 7.20              | Future Readiness                                                |
| <b>Section 8</b>  | <b>Communication Network</b>                                    |
| 8.1               | Overview                                                        |
| 8.2               | Objectives                                                      |
| 8.3               | Network Architecture                                            |
| 8.4               | OFC Backbone Infrastructure                                     |
| 8.5               | Active Network Infrastructure                                   |
| 8.6               | Wireless & RF Infrastructure                                    |
| 8.7               | Enterprise Radio / Wireless Communication System                |
| 8.8               | Network Performance Requirements                                |
| <b>Section 9</b>  | <b>Cybersecurity Framework</b>                                  |
| <b>Section 10</b> | <b>Data Center / Disaster Recovery / Storage Infrastructure</b> |
| <b>Section 11</b> | <b>ICCC, Mini War-Room &amp; Viewing Centres</b>                |
| <b>Section 12</b> | <b>Field Infrastructure</b>                                     |
| <b>Section 13</b> | <b>SLA &amp; Operations &amp; Maintenance (O&amp;M)</b>         |
| <b>Section 14</b> | <b>Implementation Schedule &amp; Deliverables</b>               |
| <b>Section 15</b> | <b>Testing, Trial Runs &amp; Acceptance</b>                     |



|                   |                                                         |
|-------------------|---------------------------------------------------------|
| <b>Section 16</b> | <b>Technical Specifications &amp; Compliance Matrix</b> |
| <b>Section 17</b> | <b>Detailed Technical Specifications of Major Items</b> |

## SECTION 1: PROJECT BACKGROUND & OBJECTIVES

### 1. PROJECT BACKGROUND & OBJECTIVES

#### 1.1 Background

Simhastha Kumbh Mela is one of the largest religious congregations in the world and is organized periodically at Ujjain on the banks of the holy river Shipra. Simhastha 2028 is scheduled to be held from 09 April 2028 to 08 May 2028 and is expected to witness an estimated cumulative footfall of approximately 30 crore pilgrims during the event period, including exceptionally high peak footfall during major Snan days.

The event shall involve extensive temporary and permanent infrastructure across approximately 3,000 hectares of Mela Area along with city-wide traffic, mobility, security, safety, emergency response, parking management, public information dissemination, and crowd management arrangements. The Mela Area includes ghats, roads, holding areas, parking areas, public congregation zones, temporary camps, transport corridors, and critical public infrastructure.

Considering the scale, complexity, and sensitivity of the event, Ujjain Smart City Limited (USCL), in coordination with Simhastha Mela Authority, District Administration, Police Department, and other stakeholder agencies, intends to establish an advanced Integrated Command & Control Centre (ICCC) ecosystem for integrated surveillance, crowd management, situational awareness, predictive monitoring, emergency coordination, and operational decision support.

The proposed ICCC ecosystem shall leverage advanced technologies including:

- AI-based video analytics,
- GIS-based operational dashboards,
- Digital Twin and simulation platform,
- integrated communication systems,
- radio/wireless communication systems,
- intelligent surveillance systems,
- traffic and parking analytics,
- drone surveillance,
- cybersecurity systems,
- and real-time field intelligence integration.

The project is envisaged as a hybrid infrastructure model comprising:

- Permanent city-level infrastructure assets for long-term smart governance and surveillance, and
- Temporary/rental infrastructure for event-specific surge deployment during Simhastha 2028.

The proposed system shall serve as a centralized operational platform for multi-agency coordination and management before, during, and after the event.

#### 1.2 Project Vision

To establish a secure, scalable, intelligent, and integrated ICCC ecosystem for Simhashta 2028 that enables proactive crowd management, real-time situational awareness, efficient emergency response, and coordinated multi-agency operations through advanced digital technologies.

### **1.3 Project Objectives**

The key objectives of the project are as follows:

#### **1.3.1 Crowd Management & Public Safety**

- Real-time monitoring and management of crowd movement across ghats, roads, holding areas, parking areas, and congregation zones.
- Detection of overcrowding, congestion, reverse flow, abnormal movement, and potential risk situations.
- Enabling predictive crowd management using AI and Digital Twin technologies.

#### **1.3.2 Integrated Surveillance & Security**

- Establishment of a comprehensive IP-based surveillance network across critical locations.
- Integration of CCTV, PTZ, panoramic, thermal, ANPR, drone, body-worn, underwater, and selected private CCTV feeds into a unified ICCC platform.
- Enhancement of law enforcement, monitoring, and incident response capabilities.

#### **1.3.3 AI-Based Situational Awareness**

- Deployment of AI-enabled video analytics for:
  - crowd density estimation,
  - heatmaps,
  - queue analysis,
  - people counting,
  - vehicle analytics,
  - fire and smoke detection,
  - intrusion detection,
  - and other operational intelligence functions.

#### **1.3.4 Digital Twin & Predictive Decision Support**

- Establishment of a GIS-enabled Digital Twin platform for:
  - real-time visualization,
  - crowd simulation,
  - congestion forecasting,
  - evacuation planning,
  - diversion planning,
  - and emergency scenario modelling.

### **1.3.5 Traffic & Parking Management**

- Monitoring and management of traffic movement on major roads leading to Ujjain, city roads, Mela Area roads, parking areas, and holding zones.
- Integration of ANPR systems and parking analytics for operational efficiency.

### **1.3.6 Multi-Agency Coordination**

- Enabling coordinated operations among:
  - District Administration,
  - Police,
  - Health Department,
  - SDRF/NDRF,
  - Fire Services,
  - Transport Agencies,
  - Municipal Authorities,
  - and other stakeholder agencies.

### **1.3.7 Emergency Response & Disaster Management**

- Real-time incident monitoring and alerting.
- Integration of SOP-driven response workflows.
- Support for emergency evacuation, medical response, disaster management, and public communication.

### **1.3.8 Citizen Services & Information Dissemination**

- Support for public information dissemination through Variable Message Displays (VMDs), public address systems, mobile applications, and other communication platforms.
- Facilitation of lost & found support and emergency communication systems.

### **1.3.9 Cybersecurity & Operational Resilience**

- Establishment of a secure and resilient ICCC ecosystem with:
  - cybersecurity controls,
  - network security,
  - SOC/SIEM integration,
  - disaster recovery mechanisms,
  - and business continuity measures.

### **1.3.10 Long-Term Smart City Asset Creation**

- Creation of scalable permanent infrastructure assets for continued use beyond Simhastha 2028 for:
  - city surveillance,

- public safety,
- traffic management,
- and future smart city initiatives.

#### **1.4 Project Scope Overview**

The scope of the project broadly includes:

- Survey, planning, design, engineering, supply, installation, integration, testing, commissioning, trial runs, training, operations and maintenance of ICCC infrastructure and associated systems.
- Deployment of hybrid permanent and rental infrastructure.
- Establishment of communication network backbone.
- AI analytics and Digital Twin implementation.
- ICCC setup and operations.
- Field infrastructure deployment.
- Integration with existing and third-party systems.
- Operations and maintenance for permanent and temporary infrastructure.

Detailed scope of work and technical requirements are specified in subsequent sections of this RFP.

#### **1.5 Guiding Principles**

The proposed solution architecture and implementation approach shall adhere to the following guiding principles:

- Scalability
- Interoperability
- Open standards
- High availability
- Cybersecurity by design
- Modular architecture
- Operational resilience
- Low latency and real-time responsiveness
- Multi-agency integration
- Future readiness and expandability

#### **1.6 Implementation Approach**

The project shall be implemented through a phased approach including:

- Detailed survey and design,
- procurement and deployment,

- integration and testing,
- trial runs and Go-Live,
- event-period operations,
- and long-term operations & maintenance.

The selected System Integrator (SI) shall be fully responsible for end-to-end implementation and operationalization of the complete ICCC ecosystem in accordance with the requirements of this RFP.

## SECTION 2: SCOPE OF WORK

### 2. SCOPE OF WORK

#### 2.1 Overview

Ujjain Smart City Limited (USCL) intends to appoint a System Integrator (SI) for design, engineering, supply, installation, integration, testing, commissioning, operations and maintenance of an Integrated Command & Control Centre (ICCC) ecosystem for Simhastha 2028, Ujjain.

The project shall include establishment of an integrated surveillance, crowd management, communication, analytics, Digital Twin, cybersecurity, and decision-support ecosystem through a hybrid deployment model comprising:

- Permanent infrastructure (CAPEX),
- Temporary/rental infrastructure for event-period surge deployment,
- and Operations & Maintenance (O&M).

The selected SI shall be responsible for complete end-to-end implementation and operationalization of all components under the project scope.

#### 2.2 Broad Scope of Services

The scope of work shall broadly include, but not be limited to, the following:

1. Detailed site survey, planning, design and engineering
2. Supply, installation and commissioning of field devices and infrastructure
3. Establishment of ICCC and associated facilities
4. Deployment of surveillance and crowd management systems
5. Deployment of AI analytics and Digital Twin platform
6. Communication network establishment and integration
7. Cybersecurity implementation
8. Integration with existing and third-party systems
9. Testing, training, trial runs and Go-Live support
10. Operations and maintenance support
11. Documentation and knowledge transfer

#### 2.3 Detailed Scope of Work

##### 2.3.1 Survey, Planning & Detailed Design

The SI shall undertake detailed field survey, planning, engineering, and preparation of all required design documents including but not limited to:

##### a) Site Survey

- Physical survey of all proposed locations
- Route survey for OFC/network infrastructure

- Identification of installation points
- Power availability assessment
- Feasibility assessment for camera placement and coverage

**b) Design & Engineering**

- Preparation of detailed architecture and network design
- Camera placement plans
- GIS mapping
- Bandwidth sizing
- Storage sizing
- Power and UPS sizing
- Rack and infrastructure layouts
- ICCC design layouts
- Integration architecture

**c) Documentation**

- Detailed Project Implementation Plan
- Method Statements
- Deployment Strategy
- Risk Mitigation Plan
- Quality Assurance Plan
- Cybersecurity Plan
- Acceptance Testing Plan

The detailed design and implementation plan shall be submitted to USCL for approval prior to execution.

**2.3.2 Supply, Installation & Commissioning of Surveillance Infrastructure**

The SI shall supply, install, configure, integrate, test and commission all surveillance infrastructure including but not limited to:

**a) Camera Systems**

- Fixed IP Cameras
- PTZ Cameras
- Panoramic / 360° Cameras
- Thermal Cameras
- ANPR Cameras
- Underwater Cameras



- Boat-mounted Cameras
- Body-Worn Cameras
- Dash Cameras

#### **b) Deployment Areas**

- Major roads leading to Ujjain
- City roads and intersections
- Mela Area roads and sectors
- Ghats and congregation areas
- Entry/exit points
- Parking areas
- Holding areas
- Critical public infrastructure
- Emergency corridors
- Transport hubs

#### **c) Private CCTV Integration**

The SI shall provide secure integration capability for selected private/institutional CCTV feeds into ICCC.

### **2.3.3 ICCC Establishment**

The SI shall establish and operationalize the ICCC ecosystem including:

#### **a) Main ICCC**

- Video wall
- Operator consoles
- Workstations
- AV systems
- Display systems
- Control room furniture
- Incident management systems

#### **b) Secondary / Backup ICCC**

- Integration with existing Smart City ICCC infrastructure, wherever applicable

#### **c) War Room**

- Temporary/rental war room setup during event period

#### **d) Viewing Centres**

- Remote viewing centres at designated locations

#### **2.3.4 AI-Based Video Analytics Platform**

The SI shall deploy and operationalize an AI-enabled analytics platform integrated with surveillance systems.

The analytics platform shall support:

- Crowd density analytics
- Heatmap generation
- Queue analytics
- Reverse flow detection
- People counting
- Intrusion detection
- Fire and smoke detection
- Vehicle analytics
- Parking analytics
- Incident analytics
- Configurable AI-based alerts

The AI platform shall support centralized management, real-time alerting, auditability, and scalability.

#### **2.3.5 Digital Twin & Decision Intelligence Platform**

The SI shall establish a GIS-enabled Digital Twin platform integrated with ICCC systems.

The platform shall include:

- Real-time GIS visualization
- Crowd simulation
- Congestion forecasting
- Traffic simulation
- Evacuation modelling
- Scenario planning
- Predictive analytics
- SOP-driven decision support
- Event correlation and situational awareness

The platform shall ingest data from:

- CCTV systems
- AI analytics
- GPS systems
- IoT devices

- ANPR systems
- Mobile applications
- Traffic systems
- Public information systems
- Other integrated platforms

#### **2.3.6 Communication Network Infrastructure**

The SI shall design, establish, integrate and maintain the communication network infrastructure including:

##### **a) OFC Backbone**

- OFC laying
- HDPE ducting
- Splicing
- Termination
- Redundant ring architecture

##### **b) Active Network Components**

- Core switches
- Aggregation switches
- Edge switches
- Routers
- Wi-Fi infrastructure
- RF/microwave links

##### **c) Network Requirements**

- High availability
- Low latency
- Scalability
- QoS for video traffic
- Secure architecture

The network shall support all surveillance and ICCC operations.

#### **2.3.7 Field Infrastructure**

The SI shall provide complete field-level infrastructure including:

- Poles and mounting structures
- Junction boxes
- UPS systems

- Power cabling
- Electrical infrastructure
- Earthing
- Lightning protection
- Outdoor enclosures
- Civil works
- Foundation works

### **2.3.8 Data Center, Storage & Disaster Recovery**

The SI shall provide and operationalize:

- Centralized storage systems
- Backup systems
- Compute infrastructure
- Virtualization infrastructure
- Disaster Recovery integration
- Redundancy and failover systems

The architecture shall support:

- minimum 60 days video retention,
- extendable to 90 days for critical feeds.

### **2.3.9 Video Management System (VMS)**

The SI shall deploy an enterprise-grade centralized Video Management System (VMS) supporting:

- Multi-camera monitoring
- Live view
- Playback
- Incident tagging
- Video archival
- Forensic search
- AI integration
- GIS integration
- Role-based access control
- Multi-site support

### **2.3.10 Cybersecurity Implementation**

The SI shall implement comprehensive cybersecurity measures including:

- Firewall systems
- IDS/IPS
- SIEM integration
- SOC support
- Secure authentication
- Device hardening
- Encryption
- Secure remote access
- Security monitoring
- VAPT support
- CERT-In compliance

#### **2.3.11 Limited Enterprise Event Communication System (Radio/Wireless Communication)**

The SI shall provide and/or integrate enterprise-grade field communication systems including wireless handheld communication devices, command dispatch consoles, and associated communication infrastructure required for coordinated field operations, emergency response, crowd management, parking operations, and multi-agency event management during Simhastha 2028.

#### **2.3.12 Public Communication & Citizen Interface Systems**

The SI shall integrate and operationalize:

- Variable Message Displays (VMDs)
- Public Address Systems
- Citizen information systems
- Emergency alert systems
- Lost & Found integration
- Mobile application interfaces

#### **2.3.13 Drone Surveillance Integration**

The SI shall deploy and integrate drone surveillance systems for:

- aerial monitoring,
- crowd assessment,
- emergency response support,
- and situational awareness.

Drone feeds shall be integrated into ICCC dashboards and GIS systems.

#### **2.3.14 Integration with Existing and Third-Party Systems**

The SI shall provide seamless integration with:

- existing ICCC systems,
- city surveillance systems,
- ATCS systems,
- GIS systems,
- emergency systems,
- mobile applications,
- police systems,
- and approved third-party platforms.

The system shall support open APIs and interoperable architecture.

### **2.3.15 Testing, Trial Runs & Acceptance**

The SI shall conduct:

- Factory Acceptance Test (FAT)
- Site Acceptance Test (SAT)
- User Acceptance Test (UAT)
- Integrated system testing
- Peak-load simulation testing
- Failover testing
- Cybersecurity testing
- Trial runs prior to Go-Live

### **2.3.16 Training & Capacity Building**

The SI shall provide comprehensive training to:

- ICCC operators
- administrators
- technical teams
- police personnel
- field personnel
- and authorized stakeholders.

Training shall include:

- system operations,
- incident handling,
- troubleshooting,
- cybersecurity awareness,

- and reporting.

### **2.3.17 Operations & Maintenance (O&M)**

The SI shall provide comprehensive O&M support for all project components including:

- preventive maintenance,
- corrective maintenance,
- software support,
- upgrades,
- spare management,
- helpdesk support,
- field support,
- and ICCC operational support.

The SI shall ensure compliance with prescribed SLAs throughout the contract period.

#### **2.3.17.1 Utility Power Supply & Electricity Charges**

The System Integrator (SI) shall be responsible for obtaining/coordinating temporary and permanent electricity connections, wherever required, for operation of ICCC infrastructure, field devices, surveillance systems, communication equipment, control rooms, war rooms, viewing centres, and associated project infrastructure during the contract period.

The SI shall initially pay all electricity consumption charges, meter charges, demand charges, temporary connection charges, and other recurring electricity-related operational expenses to the concerned utility authorities/agencies to ensure uninterrupted operations.

Such actual recurring electricity charges paid by the SI shall be reimbursed by USCL on a monthly basis, subject to:

- submission of original bills/invoices/receipts,
- certification by the Authorized Representative of USCL,
- submission of consumption details and supporting documents,
- and verification of actual deployment and operational status.

No additional administrative charges, overheads, penalties arising due to delayed payment by the SI, or interest liabilities shall be payable by USCL.

### **2.3.18 Documentation & Knowledge Transfer**

The SI shall provide:

- As-built drawings
- Asset inventory
- Network diagrams
- Configuration documents

- User manuals
- SOP documents
- Training manuals
- O&M manuals
- Cybersecurity documentation
- Backup and recovery procedures

All project-related intellectual property, documentation, configurations, and records shall be handed over to USCL upon completion or termination of the contract.

## **2.4 Responsibility of the SI**

The SI shall be solely responsible for:

- End-to-end execution,
- system integration,
- interoperability,
- performance compliance,
- SLA adherence,
- coordination with OEMs,
- statutory compliances,
- safety compliance,
- and timely completion of the project.

## **2.5 Exclusions**

Unless explicitly specified otherwise, the following shall generally remain outside the scope of the SI:

- Land acquisition
- Permanent utility shifting by external agencies
- External statutory approvals from third-party authorities
- Existing civil structures not directly related to the project

However, the SI shall assist USCL in coordination and technical support related to such activities wherever required.

## **2.6 General Requirements**

The proposed solution shall:

- Support open standards and interoperability
- Avoid vendor lock-in
- Be scalable up to minimum 30% additional load
- Support multi-agency operations



- Be resilient and fault-tolerant
- Be compliant with applicable Government guidelines and standards
- Support future expansion and integration requirements

## SECTION 3: ICCC ARCHITECTURE

### 3. ICCC Architecture

The ICCC will follow a **six-layer enterprise architecture**.

#### 3.1 Overall Architectural Philosophy

The ICCC architecture shall be designed as a multi-layered Predictive Command Platform comprising data acquisition, AI analytics, Digital Twin simulation, and decision support layers enabling proactive crowd management and real-time operational control.

The System Integrator shall have demonstrable capability in implementing AI-driven analytics platforms and Digital Twin or simulation-based systems, either directly or through OEM partnerships.

The proposed ICCC architecture integrates permanent city infrastructure with temporary event-specific systems through a unified platform. It is built to ensure:

- Real-time Situational Awareness: Immediate visibility across all mela and city zones.
- Predictive Analytics: Using data to forecast crowd density and traffic congestion.
- High Availability: A dual-site configuration (Primary DC + Disaster Recovery) for continuous operations.
- Inter-agency Coordination: A central hub for Police, Health, Revenue, and Municipal departments.

#### 3.2 The Six-Layer Architecture

The ICCC system is structured into six functional layers, progressing from field-level data acquisition to centralized command, predictive analytics, and decision-making. Each layer has a distinct role to ensure clarity, scalability, and seamless integration.

##### 3.2.1 Layer 1: Field Data Acquisition Layer

This layer comprises the physical “eyes and ears” deployed across Ujjain city and the Simhastha Mela area.

Components include:

- The field layer shall include scalable deployment of surveillance systems across mela area, city roads, and parking/holding zones based on risk and coverage requirements.
- Surveillance Systems: Fixed, PTZ, thermal, panoramic (360°), Facial Recognition (FRS), drone-based, underwater cameras, and body-worn cameras
- Mobility Systems: ANPR cameras, adaptive traffic signals, parking sensors
- Public Safety Systems: Emergency call boxes, Public Address Systems (PAS), Variable Message Displays (VMDs)
- Environmental Sensors: AQI, weather, and water quality monitoring systems
- Optional LiDAR-based sensors may be deployed at select critical locations for high-accuracy pedestrian and traffic movement detection, particularly in high-density or low-visibility conditions.

- The system shall support integration of CCTV feeds from selected private and institutional premises (e.g., temples, hotels, commercial establishments) subject to consent and technical feasibility.

### **3.2.2 Layer 2: Edge Processing & Connectivity Layer**

This layer ensures real-time data transmission and preliminary processing with minimal latency.

Key components:

- Network Backbone: OFC-based high-speed network supplemented with RF/microwave links and outdoor Wi-Fi
- Private CCTV feeds shall be onboarded through secure connectivity mechanisms (VPN/secure RTSP/edge gateways) ensuring network isolation and bandwidth optimization.
- Edge Processing: AI-enabled cameras and edge devices for:
  - Preliminary crowd density estimation
  - Event filtering and compression
  - Reduced load on central systems

### **3.2.3 Layer 3: Integration & Data Management Layer**

This layer acts as the central data exchange and storage backbone.

Components:

- Integration Middleware:
  - Enterprise Service Bus (ESB)
  - API Gateway
  - Message queues (Kafka / RabbitMQ)
  - The integration layer shall support ingestion of LiDAR point-cloud or processed data streams through standard APIs for unified processing alongside video analytics.
  - The system shall support ingestion of external data sources, including publicly available social media feeds, through secure APIs. Only publicly available data shall be used, in compliance with applicable legal and privacy frameworks.
  - The platform shall support standardized onboarding, authentication, and management of third-party CCTV feeds through APIs and secure device registration mechanisms
- Enterprise Data Lake:
  - Storage of structured and unstructured data
  - Includes video metadata, density maps, incidents, traffic data, SOS alerts
  - Technologies: Distributed storage (Hadoop), Spark/Flink processing

Function:

- Standardizes data formats
- Enables real-time data ingestion and historical data storage

- Serves as input for analytics and simulation

### **3.2.4 Layer 4: AI Analytics & Digital Twin Layer**

This is the core intelligence layer of the ICCC system. AI analytics in the proposed system shall be based on pre-trained models calibrated to local conditions and continuously refined using real-time data, achieving high accuracy for crowd monitoring and predictive decision support during the event.

Key functionalities:

AI Analytics:

- Real-time crowd density estimation
- Heatmaps and hotspot detection
- Reverse flow and anomaly detection
- Traffic analytics and incident detection

Digital Twin & Simulation:

- Real-time virtual representation of the Mela area
- Simulation of crowd movement and flow
- Prediction of congestion (15–30 minutes in advance)
- Scenario modelling:
  - Route diversion
  - Emergency evacuation
- Ghat load monitoring and balancing
- Where deployed, LiDAR data shall be used to enhance and validate AI-based crowd analytics and improve accuracy of Digital Twin simulations in high-density zones.
- Where integrated, private CCTV feeds may be utilized for supplementary analytics and Digital Twin inputs to enhance situational awareness in identified zones.

### **3.2.5 Layer 5: Decision Support & Application Layer**

This layer converts analytics into actionable decisions and operational control.

Components:

- Decision Support System (DSS):
  - Generates automated alerts
  - Recommends actions (diversion, restriction, routing)
  - Maps alerts to predefined SOPs
- Application Platforms:
  - GIS-based dashboards
  - Video Management System (VMS)
  - Traffic Management System (ITMS)

- Emergency response modules
- Lost & Found system

Function:

- Enables predictive and prescriptive decision-making
- Supports multi-agency coordination

Inputs from

- social media monitoring may be used as supplementary inputs for alert generation and situational awareness.
- third-party CCTV feeds may be used for alert generation and decision support, subject to data quality and reliability.

### **3.2.6 Layer 6: Command & Control Layer (ICCC)**

This is the operational nerve centre for monitoring, coordination, and response.

Key facilities:

- Primary ICCC (Mela Office):
  - 9,000–10,000 sq. ft. command centre
  - Large video wall
  - 40+ operator workstations
  - 50-seat War Room
- Secondary ICCC (USCL / Police):
  - Backup and redundancy
  - City-wide integration
- Local War Room (Ranoji ki Chhatri):
  - 20-seat temporary command centre (event period)
  - Zone-level coordination and rapid response
- Remote Viewing Centres (10 Nos):
  - Collectorate, Police HQ, Bhopal State Command, enroute districts
- Authorized private CCTV feeds shall be viewable within ICCC with appropriate tagging, prioritization, and access control.

Function:

- Real-time monitoring
- Decision execution
- Inter-agency coordination

### **3.3 CROSS-CUTTING LAYERS (APPLICABLE TO ALL)**

## Cybersecurity Framework

- Next-generation firewalls
- IDS/IPS systems
- Data encryption
- SIEM monitoring
- Compliance with CERT-In guidelines

## Operational Governance

- Standard Operating Procedures (SOPs)
- Incident Response System (IRS)-based command
- Multi-agency coordination (Police, Health, SDRF, Municipal)


## Citizen Interface: “Simhastha Saarathi”

A unified mobile application providing:

- Navigation & Parking: Real-time routing and availability
- Safety: Crowd heatmaps, alerts, SOS
- Recovery: Lost & Found integrated with FRS

### 3.4 Architecture Flow

This architecture ensures that after Simhastha 2028, these infrastructure will remain as a permanent, scalable command platform for Ujjain’s future smart city operations.

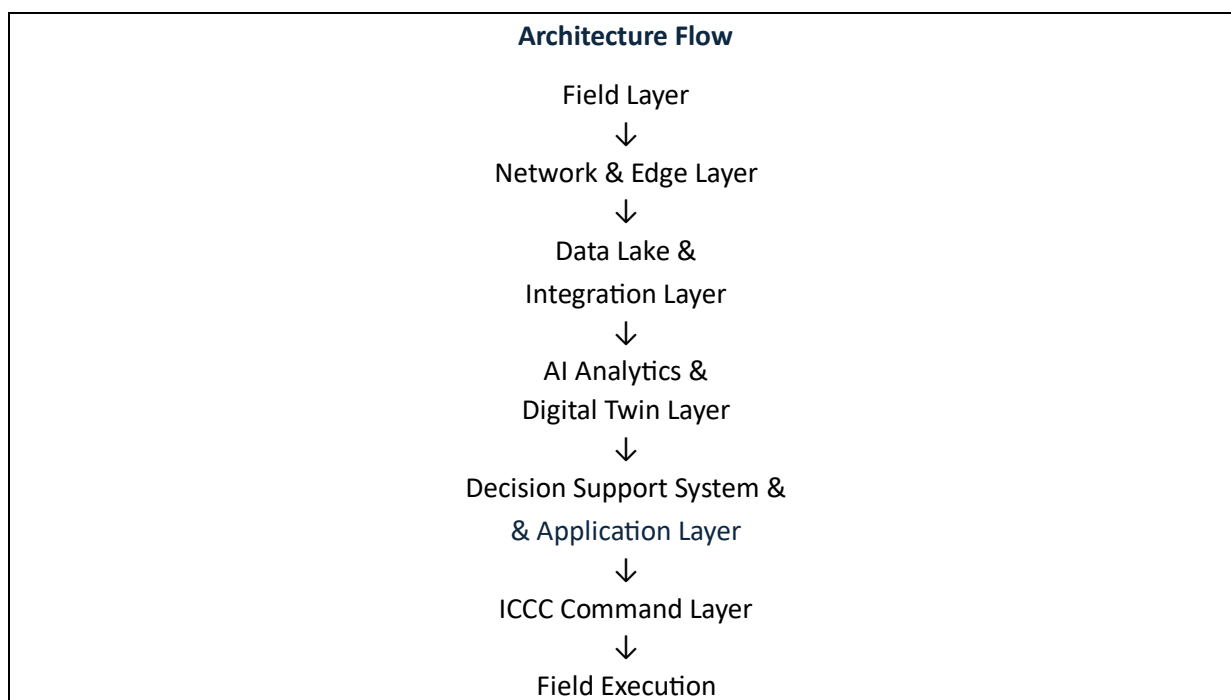

Advanced sensing technologies such as LiDAR shall remain optional enhancements and shall be integrated within the existing data and analytics framework without altering the core system architecture.

## SECTION 4: SURVEILLANCE & CROWD MANAGEMENT SYSTEM

### 4. SURVEILLANCE & CROWD MANAGEMENT SYSTEM

#### 4.1 Overview

The System Integrator (SI) shall design, supply, install, integrate, test, commission, operate and maintain a comprehensive AI-enabled Surveillance & Crowd Management System for Simhastha 2028.

The system shall provide real-time situational awareness, crowd monitoring, traffic monitoring, incident detection, operational intelligence, and emergency response support across:

- Mela Area,
- Ghats,
- Major roads leading to Ujjain,
- City roads and intersections,
- Parking areas,
- Holding areas,
- Public congregation zones,
- Emergency corridors,
- Critical infrastructure locations,
- and other identified strategic locations.

The surveillance system shall operate as an integrated component of the ICCC ecosystem and shall support interoperability with AI analytics, Digital Twin, GIS, VMS, emergency response systems, and other integrated platforms.

The overall surveillance architecture shall support:

- centralized monitoring,
- distributed operations,
- edge intelligence,
- predictive analytics,
- scalability,
- and high availability.

#### 4.2 Camera Systems

##### 4.2.1 General Requirements

The SI shall provide enterprise-grade IP-based surveillance systems compliant with open standards and suitable for continuous outdoor operations under varying environmental conditions.

The camera ecosystem shall include:

- Fixed/Bullet/Box Cameras,

- PTZ Cameras,
- Panoramic Cameras,
- Thermal Cameras,
- Specialized Cameras,
- Edge AI-enabled Cameras,
- and associated accessories.

The proposed surveillance system shall:

- support ONVIF compliance,
- support centralized VMS integration,
- support AI analytics integration,
- support GIS integration,
- support secure communication protocols,
- and support centralized health monitoring.

The system shall be designed for approximately 2,600–2,800 cameras initially and scalable up to minimum 4,000 cameras without major redesign.

#### **4.2.2 Coverage Requirements**

The surveillance deployment shall cover, but not be limited to, the following categories of locations:

##### **a) Regional Approach Corridors**

- Highways and major roads leading to Ujjain

##### **b) City Surveillance**

- Major roads,
- intersections,
- traffic junctions,
- transport hubs

##### **c) Mela Area**

- Ghats,
- Akhadas,
- congregation areas,
- internal circulation routes,
- sector roads,
- temporary camps

##### **d) Parking & Holding Areas**

- Satellite parking zones,



- holding areas,
- peripheral parking

#### **e) Critical Infrastructure**

- Bridges,
- emergency routes,
- temporary structures,
- control points,
- public utility areas

#### **4.2.3 Fixed / Bullet / Box Cameras**

The SI shall deploy fixed surveillance cameras for continuous monitoring of designated areas.

##### **Minimum Functional Requirements:**

- Minimum 5 MP resolution
- H.265/H.265+ compression
- IR illumination
- WDR support
- Low-light performance
- Motion detection
- Tamper detection
- Day/Night operation
- IP66/IP67 outdoor rating
- IK10 vandal resistance

##### **Deployment Areas:**

- Roads
- Corridors
- Parking zones
- Internal routes
- Entry/exit areas
- Public congregation areas

#### **4.2.4 PTZ Cameras**

The SI shall deploy PTZ cameras at strategic locations requiring dynamic surveillance and wide-area monitoring.

##### **Minimum Functional Requirements:**

- Minimum 25x optical zoom

- 360° continuous rotation
- Auto-tracking capability
- Preset tours
- Patrol functionality
- Intelligent tracking
- Low-light operation
- IR support

**Deployment Areas:**

- Ghats
- Major junctions
- Entry/exit points
- Critical public locations
- Large congregation zones

**4.2.5 Panoramic / 360° Cameras**

The SI shall deploy panoramic cameras at high-density crowd locations.

**Minimum Functional Requirements:**

- 180° or 360° coverage
- Multi-sensor stitching
- De-warping functionality
- Simultaneous multi-view support
- Crowd density support

**Deployment Areas:**

- Major ghats
- Public congregation areas
- Choke points
- Queue areas

**4.2.6 Thermal Cameras**

The SI shall deploy thermal cameras at critical locations requiring low-visibility monitoring.

**Minimum Functional Requirements:**

- Thermal + optical dual sensor preferred
- Fire/smoke detection support
- Night operation capability

- Long-range monitoring
- Perimeter monitoring support

#### **Deployment Areas:**

- River banks
- Critical infrastructure
- Perimeter zones
- Emergency corridors

#### **4.2.7 Edge AI Enabled Cameras**

Selected cameras shall support edge analytics capability including:

- people counting,
- intrusion detection,
- queue analytics,
- object detection,
- and event triggering.

Edge analytics shall reduce bandwidth consumption and support real-time local event processing.

#### **4.2.8 Camera Deployment Philosophy**

The surveillance system shall follow a:

- risk-based,
- density-driven,
- and zone-based deployment strategy.

Higher camera density shall be deployed in:

- ghats,
- high-footfall areas,
- entry/exit corridors,
- and critical congregation zones.

The final deployment plan shall be approved by USCL after detailed survey and simulation assessment.

#### **4.2.9 Video Retention**

The system shall support:

- minimum 60 days video retention,
- extendable up to 90 days for critical feeds.

The architecture shall support centralized and edge recording mechanisms.

#### **4.2.10 Camera Health Monitoring**

The SI shall provide centralized monitoring for:

- camera health,
- storage status,
- connectivity,
- power status,
- recording status,
- and fault alerts.

#### **4.3 Automatic Number Plate Recognition (ANPR)**

##### **4.3.1 Scope**

The SI shall deploy and integrate ANPR systems for vehicle monitoring, traffic analytics, and operational intelligence.

##### **4.3.2 Functional Requirements**

The ANPR system shall support:

- automatic vehicle number recognition,
- vehicle classification,
- blacklist/whitelist matching,
- speed analytics,
- route tracking,
- and vehicle movement analytics.

##### **4.3.3 Deployment Areas**

ANPR systems shall be deployed at:

- city entry points,
- highways,
- parking areas,
- holding areas,
- major intersections,
- and critical traffic corridors.

##### **4.3.4 Performance Requirements**

The system shall support:

- minimum 95% recognition accuracy during daytime,
- minimum 90% accuracy during night conditions,
- multi-lane support,
- and real-time alerting.

#### **4.3.5 Integration**

The ANPR system shall integrate with:

- VMS,
- ICCC dashboards,
- AI analytics,
- traffic management systems,
- and GIS platform.

#### **4.4 Body Cameras and Dash Cameras**

##### **4.4.1 Scope**

The SI shall deploy body-worn cameras and vehicle-mounted dash cameras for field operations, law enforcement support, and incident recording.

##### **4.4.2 Body-Worn Cameras**

###### **Functional Requirements:**

- Full HD recording
- GPS tagging
- Audio recording
- Night vision support
- Docking station support
- Secure upload capability
- Tamper resistance

###### **Usage Areas:**

- Police personnel
- Field enforcement teams
- Emergency response teams
- Crowd management teams

##### **4.4.3 Dash Cameras**

###### **Functional Requirements:**

- Continuous recording
- GPS support
- Low-light support
- Secure storage
- Real-time upload capability preferred

###### **Deployment Areas:**

- Police vehicles
- Emergency vehicles
- Patrol vehicles
- Field operation vehicles

#### **4.4.4 Integration**

Body-worn and dash camera systems shall integrate with:

- ICCC,
- VMS,
- evidence management systems,
- and authorized playback systems.

### **4.5 Drone Integration**

#### **4.5.1 Scope**

The SI shall deploy and integrate drone surveillance systems for aerial situational awareness and dynamic surveillance.

#### **4.5.2 Functional Requirements**

The drone system shall support:

- live video streaming,
- aerial monitoring,
- crowd assessment,
- emergency response support,
- route assessment,
- and situational visualization.

#### **4.5.3 Drone Requirements**

**Minimum Requirements:**

- Flight time  $\geq$  30 minutes
- HD/4K camera
- Stabilized gimbal
- Real-time streaming
- GPS support
- Night operation support preferred

#### **4.5.4 Integration**

Drone feeds shall integrate with:

- ICCC,

- GIS platform,
- Digital Twin,
- and VMS.

#### **4.5.5 Regulatory Compliance**

The SI shall ensure compliance with:

- DGCA regulations,
- aviation guidelines,
- no-fly zone restrictions,
- and other statutory requirements.

### **4.6 Water Surveillance**

#### **4.6.1 Scope**

The SI shall provide integrated river and water surveillance systems for monitoring activities at ghats and river stretches.

#### **4.6.2 Components**

The water surveillance system may include:

- underwater cameras,
- boat-mounted cameras,
- thermal surveillance,
- floating surveillance systems,
- and associated communication infrastructure.

#### **4.6.3 Deployment**

Approximately 35–45 underwater and boat-mounted surveillance cameras shall be deployed in hybrid mode (permanent and rental) focusing on:

- high-risk ghats,
- major bathing locations,
- and critical river stretches.

#### **4.6.4 Functional Requirements**

The system shall support:

- real-time river monitoring,
- crowd monitoring near water zones,
- emergency response support,
- low-light monitoring,
- and integration with rescue operations.

#### **4.6.5 Integration**

The water surveillance system shall integrate with:

- ICCC,
- GIS platform,
- VMS,
- AI analytics,
- and emergency response systems.

#### **4.7 Private CCTV Integration**

##### **4.7.1 Scope**

The surveillance architecture shall support integration of selected private/institutional CCTV feeds for enhanced situational awareness.

##### **4.7.2 Eligible Sources**

Feeds may be integrated from

- temples,
- hotels,
- dharamshalas,
- commercial establishments,
- educational institutions,
- hospitals,
- and other identified locations.

##### **4.7.3 Integration Requirements**

The integration framework shall support:

- secure API/VPN-based integration,
- role-based access control,
- tagging and categorization,
- audit logging,
- and selective feed onboarding.

##### **4.7.4 Security & Privacy**

Private CCTV integration shall be:

- consent-based,
- secure,
- access-controlled,
- and compliant with applicable cybersecurity and privacy requirements.



#### **4.7.5 Scalability**

The system shall support integration of minimum 600–800 external CCTV feeds without major redesign.

## SECTION 5: VIDEO MANAGEMENT SYSTEM (VMS)

### 5. VIDEO MANAGEMENT SYSTEM (VMS)

#### 5.1 Overview

The System Integrator (SI) shall design, supply, install, configure, integrate, test, commission, operate and maintain an enterprise-grade centralized Video Management System (VMS) for Simhastha 2028.

The VMS shall function as the centralized video monitoring, recording, management, playback, event handling, and operational intelligence platform for the ICCC ecosystem.

The VMS shall support integration with:

- CCTV systems,
- AI analytics engines,
- Digital Twin platform,
- GIS systems,
- ANPR systems,
- Drone surveillance,
- Body-worn cameras,
- Dash cameras,
- Water surveillance systems,
- Public communication systems,
- and other integrated platforms.

The proposed VMS shall support centralized and distributed operations with high availability, scalability, and interoperability.

#### 5.2 General Requirements

##### 5.2.1 Architecture

The proposed VMS shall:

- be enterprise-grade and scalable,
- support centralized and distributed deployment,
- support multi-site architecture,
- support edge and centralized recording,
- support failover architecture,
- support redundant operation,
- and support open standards and interoperability.

The VMS shall not be based on standalone DVR/NVR-centric architecture and shall support centralized enterprise video management.

### **5.2.2 Open Standards & Interoperability**

The VMS shall:

- support ONVIF compliance,
- support integration with multi-OEM cameras,
- support standard APIs,
- support third-party integrations,
- and avoid vendor lock-in.

The VMS shall support integration with:

- existing surveillance systems,
- future surveillance systems,
- and approved third-party platforms.

### **5.2.3 Scalability**

The proposed VMS shall:

- initially support approximately 2,600–2,800 cameras,
- be scalable up to minimum 4,000 cameras,
- support future expansion without major redesign,
- and support additional recording and analytics load.

## **5.3 Functional Requirements**

### **5.3.1 Live Monitoring**

The VMS shall support:

- real-time live video monitoring,
- simultaneous multi-camera viewing,
- customizable layouts,
- dynamic camera grouping,
- operator-based view configuration,
- and multi-monitor support.

The system shall support viewing of:

- live feeds,
- recorded feeds,
- AI alerts,
- and GIS-linked video streams.

### **5.3.2 Recording Management**

The VMS shall support:

- continuous recording,
- scheduled recording,
- event-triggered recording,
- edge recording,
- centralized recording,
- failover recording,
- and recording synchronization.

The system shall support:

- minimum 60 days retention,
- extendable to 90 days for critical feeds.

### **5.3.3 Playback & Forensic Investigation**

The VMS shall support:

- synchronized playback,
- timeline-based playback,
- forensic search,
- event search,
- bookmark tagging,
- smart playback,
- frame-by-frame analysis,
- and evidence export.

The system shall support investigation workflows for authorized users.

### **5.3.4 Event & Alarm Management**

The VMS shall support:

- real-time alarm handling,
- event prioritization,
- event acknowledgement,
- event escalation,
- incident tagging,
- and configurable alarm workflows.

The VMS shall support alarms generated from:

- AI analytics,

- ANPR systems,
- intrusion detection,
- motion events,
- camera tampering,
- storage failures,
- network failures,
- and other integrated systems.

#### **5.3.5 Camera Management**

The VMS shall support:

- centralized camera provisioning,
- remote camera configuration,
- firmware management,
- health monitoring,
- camera grouping,
- camera maps,
- and user-based camera access.

#### **5.3.6 User & Role Management**

The VMS shall support:

- Role-Based Access Control (RBAC),
- user authentication,
- granular permissions,
- operator-level access,
- multi-level authorization,
- audit trails,
- and activity logging.

#### **5.3.7 GIS Integration**

The VMS shall support integration with:

- GIS platform,
- Digital Twin platform,
- geospatial dashboards,
- and location-based camera visualization.

Operators shall be able to:

- view camera locations on maps,
- trigger camera feeds from GIS interface,
- and correlate incidents geographically.

#### **5.3.8 AI Analytics Integration**

The VMS shall support integration with AI/video analytics systems including:

- crowd density analytics,
- heatmaps,
- people counting,
- reverse flow detection,
- intrusion analytics,
- fire/smoke analytics,
- queue analytics,
- traffic analytics,
- and incident detection systems.

AI-generated alerts shall be:

- auditable,
- operator-verifiable,
- and configurable.

#### **5.3.9 ANPR Integration**

The VMS shall support:

- ANPR event visualization,
- vehicle search,
- vehicle tracking,
- blacklist/whitelist alerts,
- and integration with traffic dashboards.

#### **5.3.10 Drone & Mobility Integration**

The VMS shall support integration of:

- drone feeds,
- body-worn camera feeds,
- dash camera feeds,
- and mobile surveillance systems.

#### **5.3.11 Incident Management**

The VMS shall support:

- incident creation,
- incident tracking,
- event correlation,
- incident escalation,
- and incident closure workflows.

The system shall support incident linkage with:

- GIS,
- AI analytics,
- Digital Twin,
- and emergency response systems.

## **5.4 Technical Requirements**

### **5.4.1 Compression & Streaming**

The VMS shall support:

- H.264,
- H.265,
- adaptive streaming,
- multicast/unicast streaming,
- and bandwidth optimization.

### **5.4.2 Performance**

The VMS shall support:

- low-latency operations,
- simultaneous multi-user access,
- large-scale video ingestion,
- and high-volume event handling.

Critical alerts shall be processed within acceptable operational timelines.

### **5.4.3 Redundancy & High Availability**

The VMS architecture shall support:

- server redundancy,
- failover clustering,
- database redundancy,
- storage redundancy,

- and uninterrupted operations.

The system shall support automatic failover mechanisms.

#### **5.4.4 Edge Recording Support**

The VMS shall support:

- edge recording on cameras,
- recording synchronization,
- automatic recovery after connectivity restoration,
- and centralized archival.

#### **5.4.5 Time Synchronization**

The system shall support centralized time synchronization through:

- NTP,
- GPS synchronization,
- or equivalent mechanisms.

### **5.5 Video Storage & Archival**

#### **5.5.1 Storage Architecture**

The VMS shall support:

- centralized storage,
- distributed storage,
- edge storage,
- RAID configuration,
- archival management,
- and storage scalability.

#### **5.5.2 Retention Policy**

The VMS shall support:

- minimum 60 days retention,
- extendable to 90 days for critical feeds,
- policy-based retention,
- and selective archival.

#### **5.5.3 Evidence Export**

The system shall support:

- encrypted export,
- watermarking,



- chain-of-custody support,
- and tamper-evident evidence handling.

## **5.6 Health Monitoring & Diagnostics**

The VMS shall provide centralized monitoring of:

- camera status,
- recording status,
- storage health,
- network connectivity,
- server health,
- and application health.

Automated alerts shall be generated for:

- device failures,
- storage failures,
- camera tampering,
- recording failures,
- and connectivity loss.

## **5.7 Cybersecurity Requirements**

The VMS shall support:

- secure authentication,
- password policies,
- encryption,
- secure communication,
- audit logs,
- session management,
- and cybersecurity hardening.

The system shall comply with:

- CERT-In guidelines,
- applicable Government cybersecurity requirements,
- and industry best practices.

## **5.8 Reporting & Analytics**

The VMS shall support:

- operational reports,

- alarm reports,
- incident reports,
- audit reports,
- user activity reports,
- and customizable dashboards.

Reports shall support export in standard formats including:

- PDF,
- CSV,
- XLSX.

### **5.9 Mobile & Remote Access**

The VMS shall support:

- secure web access,
- mobile/tablet access,
- remote monitoring,
- and secure remote administration.

Remote access shall be role-based and securely authenticated.

### **5.10 Integration Requirements**

The VMS shall support seamless integration with:

- ICCC systems,
- AI platforms,
- Digital Twin platform,
- GIS systems,
- ANPR systems,
- drone systems,
- public communication systems,
- emergency systems,
- and other approved third-party systems.

The system shall support:

- REST APIs,
- SDK support,
- and standard integration interfaces.

### **5.11 Testing & Acceptance**

The SI shall demonstrate:

- live monitoring,
- recording functionality,
- playback functionality,
- failover operations,
- analytics integration,
- GIS integration,
- and alert handling

during:

- FAT,
- SAT,
- UAT,
- and trial run stages.

#### **5.12 OEM & Support Requirements**

The proposed VMS solution shall:

- be OEM-backed,
- have proven enterprise deployments,
- support long-term updates,
- and provide technical support for the contract period.

OEM authorization and support commitment shall be mandatory.

#### **5.13 SLA Requirements**

The VMS shall support:

- minimum 99.5% uptime during event period,
- defined incident response timelines,
- fault monitoring,
- and performance tracking.

Peak snan days shall be treated as critical operational periods requiring enhanced SLA compliance.

#### **5.14 Future Readiness**

The proposed VMS architecture shall:

- support future expansion,
- support additional analytics modules,
- support additional camera onboarding,

- support integration with future city systems,
- and support evolving smart city requirements without major redesign.

## SECTION 6: AI ANALYTICS PLATFORM

### 6. AI ANALYTICS PLATFORM

#### 6.1 Overview

The System Integrator (SI) shall design, supply, install, configure, integrate, test, commission, operate and maintain an enterprise-grade AI Analytics Platform for Simhastha 2028.

The AI Analytics Platform shall function as the intelligent operational analytics layer of the ICCC ecosystem and shall provide real-time situational awareness, crowd intelligence, traffic intelligence, predictive analytics, event detection, operational alerts, and decision support.

The platform shall process and analyze data from:

- CCTV systems,
- PTZ cameras,
- panoramic cameras,
- thermal cameras,
- ANPR systems,
- drone feeds,
- body-worn cameras,
- dash cameras,
- water surveillance systems,
- IoT devices,
- GIS systems,
- and other integrated platforms.

The AI platform shall support:

- real-time analytics,
- centralized event management,
- predictive intelligence,
- GIS correlation,
- Digital Twin integration,
- and automated operational workflows.

#### 6.2 Objectives

The objectives of the AI Analytics Platform include:

- proactive crowd management,
- congestion prediction,
- incident detection,

- operational intelligence generation,
- automated alerting,
- enhanced situational awareness,
- traffic and parking analytics,
- emergency response support,
- and data-driven operational decision making.

### **6.3 General Requirements**

#### **6.3.1 Architecture**

The proposed AI Analytics Platform shall be enterprise-grade, modular, scalable, API-driven, and support distributed processing architecture.

The platform shall support centralized analytics, edge analytics, hybrid processing, GPU-enabled processing, and high availability architecture.

#### **6.3.2 Open Standards & Interoperability**

The AI platform shall support integration with multi-OEM systems, support ONVIF-compliant video systems, support REST APIs, support SDK integration, and avoid vendor lock-in.

The platform shall support integration with:

- VMS,
- Digital Twin platform,
- GIS systems,
- ANPR systems,
- traffic systems,
- emergency systems,
- and approved third-party applications.

#### **6.3.3 Scalability**

The platform shall:

- initially support analytics processing for approximately 2,800–3,000 cameras,
- support future scaling up to minimum 4,000 cameras,
- support additional analytics modules,
- and support future onboarding of additional data sources without major redesign.

### **6.4 Core Functional Modules**

#### **6.4.1 Crowd Density Analytics**

The AI platform shall support:

- real-time crowd density estimation,

- density threshold monitoring,
- dynamic crowd heatmaps,
- crowd intensity classification,
- and high-density alert generation.

The system shall support:

- configurable density thresholds,
- GIS-linked visualization,
- and automated operational alerts.

#### **6.4.2 Crowd Flow Analytics**

The platform shall support:

- crowd movement tracking,
- directional flow analysis,
- pedestrian flow monitoring,
- abnormal movement detection,
- and crowd flow visualization.

#### **6.4.3 Reverse Flow Detection**

The system shall support:

- reverse crowd movement detection,
- abnormal directional flow alerts,
- and configurable operational thresholds.

The analytics engine shall generate real-time alerts for:

- counter-direction movement,
- congestion buildup,
- and abnormal crowd behaviour.

#### **6.4.4 Queue Analytics**

The AI platform shall support:

- queue detection,
- queue length estimation,
- waiting time estimation,
- queue overflow alerts,
- and queue trend analysis.

#### **6.4.5 People Counting**

The system shall support:

- real-time people counting,
- zone-wise occupancy monitoring,
- entry/exit counting,
- and crowd accumulation analytics.

#### **6.4.6 Heatmap Generation**

The platform shall support:

- dynamic heatmaps,
- temporal heatmaps,
- movement heatmaps,
- and GIS-based visualization.

Heatmaps shall support:

- crowd monitoring,
- traffic monitoring,
- and incident hotspot identification.

#### **6.4.7 Intrusion & Perimeter Analytics**

The platform shall support:

- intrusion detection,
- line crossing detection,
- zone intrusion alerts,
- virtual fencing,
- and perimeter breach analytics.

#### **6.4.8 Fire & Smoke Detection**

The AI system shall support:

- fire detection,
- smoke detection,
- abnormal heat detection,
- and automated alert generation.

The system shall support integration with:

- thermal cameras,
- emergency systems,
- and incident management systems.



#### **6.4.9 Vehicle Analytics**

The platform shall support:

- vehicle counting,
- vehicle classification,
- traffic density estimation,
- congestion analytics,
- and route utilization analysis.

#### **6.4.10 Parking Analytics**

The system shall support:

- parking occupancy analytics,
- parking utilization analytics,
- inflow/outflow analytics,
- and parking congestion alerts.

#### **6.4.11 Incident Analytics**

The AI platform shall support:

- suspicious activity detection,
- abnormal event detection,
- crowd anomaly detection,
- unattended object detection,
- and configurable operational event analytics.

#### **6.4.12 Water Surveillance Analytics**

The system shall support analytics for:

- riverbank monitoring,
- water-zone crowd monitoring,
- restricted zone detection,
- and emergency event alerts.

### **6.5 Predictive Analytics & Decision Support**

#### **6.5.1 Predictive Intelligence**

The AI platform shall support:

- predictive congestion analytics,
- trend analysis,
- behavioural analytics,

- and event forecasting.

The system shall support forecasting of:

- crowd buildup,
- congestion formation,
- traffic accumulation,
- and operational risk indicators.

#### **6.5.2 Forecast Window**

The system shall support predictive analysis for:

- 15–30 minute operational forecasting,
- configurable forecasting windows,
- and trend-based operational recommendations.

#### **6.5.3 Decision Support Integration**

The AI platform shall support:

- SOP-based alerting,
- automated operational recommendations,
- escalation workflows,
- and integration with Digital Twin simulations.

### **6.6 GIS & Digital Twin Integration**

#### **6.6.1 GIS Integration**

The platform shall support:

- GIS-based visualization,
- map-based event plotting,
- geospatial correlation,
- and location-based alert visualization.

#### **6.6.2 Digital Twin Integration**

The AI platform shall integrate with the Digital Twin platform for:

- simulation-driven analytics,
- predictive crowd modelling,
- congestion forecasting,
- and evacuation scenario support.

### **6.7 Alert Management System**

#### **6.7.1 Alert Generation**

The AI platform shall generate:

- real-time alerts,
- threshold-based alerts,
- predictive alerts,
- event-based alerts,
- and escalated alerts.

#### **6.7.2 Alert Prioritization**

Alerts shall support:

- severity classification,
- location tagging,
- incident categorization,
- and configurable escalation hierarchy.

#### **6.7.3 Alert Channels**

Alerts shall support:

- ICCC dashboards,
- video wall integration,
- SMS,
- email,
- mobile application notifications,
- and other configured communication channels.

### **6.8 AI Model Requirements**

#### **6.8.1 AI Model Characteristics**

The AI models shall:

- be configurable,
- support retraining and tuning,
- support operational calibration,
- and support contextual optimization.

#### **6.8.2 AI Explainability**

The platform shall support:

- operator-verifiable alerts,
- auditability of AI-generated events,
- explainable event triggers,

- and operational review capability.

### **6.8.3 Accuracy Requirements**

The AI platform shall provide high operational accuracy under varied environmental conditions.

The bidder shall specify:

- expected accuracy levels,
- environmental limitations,
- and operational dependencies.

## **6.9 Performance Requirements**

### **6.9.1 Processing Latency**

The AI platform shall support:

- near real-time analytics processing,
- low-latency event generation,
- and rapid operational alerting.

Critical alerts shall preferably be generated within operationally acceptable timelines.

### **6.9.2 Concurrent Processing**

The system shall support:

- simultaneous multi-camera analytics,
- high-density event processing,
- and large-scale event handling during peak snan periods.

### **6.9.3 High Availability**

The AI platform shall support:

- redundant architecture,
- failover capability,
- load balancing,
- and uninterrupted analytics operations.

## **6.10 Dashboard & Visualization**

### **6.10.1 Operational Dashboard**

The platform shall provide centralized dashboards for:

- crowd monitoring,
- traffic analytics,
- event monitoring,
- predictive alerts,

- and operational intelligence.

#### **6.10.2 Customizable Views**

The system shall support:

- role-based dashboards,
- configurable widgets,
- customizable analytics views,
- and multi-screen operations.

#### **6.10.3 Reporting**

The platform shall support:

- operational reports,
- incident reports,
- trend reports,
- crowd analytics reports,
- traffic reports,
- and exportable reports.

Reports shall support:

- PDF,
- XLSX,
- CSV,
- and GIS-compatible exports.

### **6.11 Cybersecurity & Data Protection**

#### **6.11.1 Security Requirements**

The AI platform shall support:

- secure authentication,
- encrypted communication,
- audit logging,
- access control,
- and cybersecurity hardening.

#### **6.11.2 Compliance**

The platform shall comply with:

- CERT-In guidelines,
- applicable Government cybersecurity requirements,

- and industry best practices.

#### **6.12 Integration Requirements**

The AI platform shall support seamless integration with:

- VMS,
- ICCC,
- Digital Twin platform,
- GIS systems,
- ANPR systems,
- emergency systems,
- public communication systems,
- and approved third-party systems.

The platform shall support:

- REST APIs,
- SDK support,
- and standard integration mechanisms.

#### **6.13 Testing & Acceptance**

The SI shall demonstrate the following during FAT/SAT/UAT/PoC:

- crowd density analytics,
- queue analytics,
- heatmaps,
- reverse flow detection,
- predictive alerts,
- GIS integration,
- Digital Twin integration,
- and alert workflows.

Peak-load simulation and operational stress testing shall be carried out before Go-Live.

#### **6.14 Training & Knowledge Transfer**

The SI shall provide training for:

- ICCC operators,
- administrators,
- police personnel,
- and authorized users

covering:

- analytics interpretation,
- incident management,
- dashboard operations,
- and operational workflows.

#### **6.15 OEM & Support Requirements**

The AI Analytics Platform shall:

- be OEM-backed,
- have proven large-scale deployment experience,
- support enterprise-grade operations,
- and provide updates and support during the contract period.

OEM authorization and support commitment shall be mandatory.

#### **6.16 SLA Requirements**

The AI platform shall support:

- minimum 99.5% uptime during event period,
- defined alert response timelines,
- performance monitoring,
- and fault reporting.

Major snan days shall be treated as critical operational periods requiring enhanced SLA compliance.

#### **6.17 Future Readiness**

The proposed AI platform shall:

- support future analytics modules,
- support additional integrations,
- support future smart city use cases,
- and support evolving operational requirements without major redesign.

## SECTION 7: DIGITAL TWIN & DECISION INTELLIGENCE PLATFORM

### 7. DIGITAL TWIN & DECISION INTELLIGENCE PLATFORM

#### 7.1 Overview

The System Integrator (SI) shall design, supply, install, configure, integrate, test, commission, operate and maintain an enterprise-grade Digital Twin & Decision Intelligence Platform for Simhastha 2028.

The platform shall function as the predictive intelligence, simulation, operational visualization, and decision-support layer of the ICCC ecosystem and shall enable:

- real-time situational awareness,
- predictive crowd management,
- traffic intelligence,
- congestion forecasting,
- emergency response planning,
- simulation-driven operational decisions,
- and coordinated multi-agency management.

The platform shall create a dynamic digital representation of:

- the Mela Area,
- city infrastructure,
- ghats,
- roads,
- parking areas,
- holding zones,
- public facilities,
- transport corridors,
- and integrated operational assets.

The platform shall ingest and correlate real-time operational data from:

- surveillance systems,
- AI analytics,
- ANPR systems,
- IoT devices,
- drones,
- GPS systems,
- public communication systems,



- traffic systems,
- weather systems,
- social media monitoring systems,
- and other integrated platforms.

## **7.2 Objectives**

The objectives of the Digital Twin & Decision Intelligence Platform include:

- predictive crowd management,
- proactive congestion mitigation,
- simulation-based planning,
- operational decision support,
- multi-agency coordination,
- emergency response optimization,
- and enhanced situational intelligence.

## **7.3 General Requirements**

### **7.3.1 Architecture**

The proposed platform shall:

- be enterprise-grade,
- GIS-enabled,
- modular,
- scalable,
- API-driven,
- and based on open architecture principles.

The platform shall support:

- centralized operations,
- distributed operations,
- hybrid cloud/on-premise deployment,
- and high availability architecture.

### **7.3.2 Open Standards & Interoperability**

The platform shall:

- support standard APIs,
- support multi-OEM integration,
- support open GIS standards,

- support integration with third-party systems,
- and avoid vendor lock-in.

The platform shall support seamless integration with:

- ICCC,
- VMS,
- AI Analytics Platform,
- GIS systems,
- ANPR systems,
- ATCS,
- emergency systems,
- and approved external systems.

### **7.3.3 Scalability**

The proposed platform shall:

- initially support operations for approximately 2,600–2,800 cameras,
- support future expansion up to minimum 4,000 cameras,
- support onboarding of additional IoT devices and systems,
- and support future smart city integrations without major redesign.

## **7.4 GIS & Geospatial Visualization**

### **7.4.1 GIS-Based Visualization**

The platform shall provide:

- real-time GIS visualization,
- map-based situational awareness,
- multi-layer operational dashboards,
- and geospatial incident correlation.

### **7.4.2 GIS Layers**

The platform shall support configurable GIS layers including:

- roads,
- ghats,
- sectors,
- parking areas,
- holding areas,
- utilities,

- emergency infrastructure,
- surveillance infrastructure,
- public facilities,
- transport infrastructure,
- and operational assets.

#### **7.4.3 2D & 3D Visualization**

The platform shall support:

- 2D GIS visualization,
- 3D visualization,
- object-level navigation,
- zoom/pan/rotate functionality,
- and layered operational visualization.

#### **7.4.4 Asset Visualization**

The platform shall support visualization of:

- cameras,
- drones,
- vehicles,
- public infrastructure,
- field personnel,
- and operational assets on GIS interface.

### **7.5 Real-Time Data Ingestion & Correlation**

#### **7.5.1 Data Ingestion**

The platform shall ingest real-time data from:

- CCTV systems,
- AI analytics engines,
- ANPR systems,
- drones,
- IoT devices,
- GPS systems,
- parking systems,
- traffic systems,
- public communication systems,

- and approved third-party platforms.

#### **7.5.2 Data Correlation**

The platform shall support:

- multi-source event correlation,
- GIS-linked operational intelligence,
- incident correlation,
- and unified operational visualization.

#### **7.5.3 Data Refresh Rate**

The platform shall support near real-time operational updates with minimal latency suitable for operational decision making.

### **7.6 Crowd Simulation & Predictive Analytics**

#### **7.6.1 Crowd Simulation**

The platform shall support:

- crowd movement simulation,
- pedestrian flow modelling,
- density forecasting,
- and crowd accumulation analysis.

#### **7.6.2 Congestion Forecasting**

The platform shall support:

- predictive congestion analytics,
- hotspot forecasting,
- queue buildup prediction,
- and movement trend analysis.

The platform shall support operational forecasting for:

- 15–30 minute predictive windows.

#### **7.6.3 Crowd Diversion Support**

The system shall support:

- crowd diversion planning,
- alternate route identification,
- crowd balancing strategies,
- and operational recommendations.

#### **7.6.4 Reverse Flow Risk Analysis**

The platform shall support:

- reverse flow simulation,
- abnormal movement modelling,
- and risk zone identification.

## **7.7 Traffic & Mobility Intelligence**

### **7.7.1 Traffic Simulation**

The platform shall support:

- traffic movement simulation,
- congestion analysis,
- route utilization analytics,
- and diversion planning.

### **7.7.2 Parking Intelligence**

The platform shall support:

- parking occupancy visualization,
- parking utilization analytics,
- holding area analytics,
- and inflow/outflow estimation.

### **7.7.3 Route Optimization**

The system shall support:

- emergency route optimization,
- traffic rerouting recommendations,
- and dynamic mobility planning.

## **7.8 Emergency Response & Disaster Management**

### **7.8.1 Emergency Simulation**

The platform shall support:

- emergency scenario simulation,
- evacuation modelling,
- crowd evacuation planning,
- disaster response planning,
- and operational stress simulation.

### **7.8.2 Evacuation Modelling**

The platform shall support:

- evacuation route analysis,

- safe-zone planning,
- exit capacity assessment,
- and response time estimation.

### **7.8.3 Incident Correlation**

The system shall support:

- incident visualization,
- multi-agency coordination support,
- incident escalation,
- and real-time operational decision support.

## **7.9 Decision Intelligence Engine**

### **7.9.1 Decision Support**

The platform shall support:

- automated operational recommendations,
- SOP-based response workflows,
- incident prioritization,
- and escalation support.

### **7.9.2 Workflow Automation**

The platform shall support:

- configurable workflows,
- rule-based automation,
- escalation workflows,
- and incident lifecycle management.

### **7.9.3 Alert Prioritization**

The system shall support:

- severity-based alerts,
- geography-based alerts,
- impact-based prioritization,
- and configurable escalation matrix.

### **7.9.4 Multi-Agency Coordination**

The platform shall support coordinated operational workflows for:

- Police,
- Administration,

- Health Department,
- Fire Services,
- SDRF/NDRF,
- Transport Agencies,
- and other stakeholders.

## **7.10 Social Media & External Intelligence Integration**

### **7.10.1 Social Media Monitoring**

The platform shall support integration with approved social media monitoring systems for:

- public sentiment analysis,
- event monitoring,
- rumor detection,
- incident reporting,
- and operational alerts.

### **7.10.2 External Data Sources**

The platform shall support integration with:

- weather systems,
- AQI systems,
- river/water monitoring systems,
- GPS systems,
- and approved external operational data sources.

## **7.11 Dashboard & Visualization**

### **7.11.1 Unified Dashboard**

The platform shall provide:

- centralized operational dashboard,
- GIS-based operational view,
- incident dashboard,
- predictive analytics dashboard,
- and executive dashboards.

### **7.11.2 Role-Based Dashboards**

The platform shall support:

- operator dashboards,
- supervisory dashboards,

- command dashboards,
- field dashboards,
- and agency-specific views.

### **7.11.3 Video Integration**

The platform shall support:

- live video overlays,
- GIS-linked video streams,
- camera trigger from GIS map,
- and synchronized operational visualization.

## **7.12 Reporting & Analytics**

### **7.12.1 Reporting**

The platform shall support:

- operational reports,
- simulation reports,
- incident reports,
- trend analysis reports,
- and predictive analytics reports.

### **7.12.2 Export Capability**

Reports and dashboards shall support export in:

- PDF,
- XLSX,
- CSV,
- GIS-compatible formats.

## **7.13 Performance Requirements**

### **7.13.1 Processing Performance**

The platform shall support:

- simultaneous multi-source ingestion,
- real-time visualization,
- and large-scale event processing.

### **7.13.2 High Availability**

The platform shall support:

- redundant architecture,



- failover mechanisms,
- load balancing,
- and uninterrupted operations.

### **7.13.3 Operational Latency**

Critical alerts and operational recommendations shall be generated within operationally acceptable timelines suitable for real-time command operations.

## **7.14 Cybersecurity & Data Protection**

### **7.14.1 Security Requirements**

The platform shall support:

- secure authentication,
- encrypted communication,
- audit logging,
- secure APIs,
- access control,
- and cybersecurity hardening.

### **7.14.2 Compliance**

The platform shall comply with:

- CERT-In guidelines,
- applicable Government cybersecurity standards,
- and industry best practices.

## **7.15 Integration Requirements**

The platform shall support seamless integration with:

- ICCC,
- VMS,
- AI Analytics Platform,
- ANPR systems,
- GIS systems,
- ATCS,
- public communication systems,
- emergency systems,
- and approved third-party systems.

The platform shall support:

- REST APIs,

- SDKs,
- WebSocket/MQTT support where applicable,
- and standard integration frameworks.

#### **7.16 Testing & Acceptance**

The SI shall demonstrate during FAT/SAT/UAT/PoC:

- GIS visualization,
- crowd simulation,
- congestion forecasting,
- predictive alerts,
- evacuation modelling,
- dashboard functionality,
- workflow automation,
- and multi-system integration.

Peak-load simulation and operational stress testing shall be carried out prior to Go-Live.

#### **7.17 Training & Capacity Building**

The SI shall provide comprehensive training for:

- ICCC operators,
- administrators,
- technical teams,
- field personnel,
- and stakeholder agencies.

Training shall include:

- platform operations,
- simulation workflows,
- incident management,
- dashboard operations,
- and operational decision support usage.

#### **7.18 OEM & Support Requirements**

The proposed platform shall:

- be OEM-backed,
- have proven enterprise deployment experience,
- support long-term upgrades,

- and provide technical support during the contract period.

OEM authorization and support commitment shall be mandatory.

#### **7.19 SLA Requirements**

The platform shall support:

- minimum 99.5% uptime during event period,
- real-time operational responsiveness,
- defined alert timelines,
- and operational continuity during major snan days.

#### **7.20 Future Readiness**

The proposed platform shall:

- support future smart city integrations,
- support onboarding of additional sensors and systems,
- support future analytics modules,
- and support evolving operational requirements without major redesign.

## SECTION 8: COMMUNICATION NETWORK

### 8. COMMUNICATION NETWORK

#### 8.1 Overview

The System Integrator (SI) shall design, engineer, supply, install, integrate, test, commission, operate and maintain a highly available, resilient, scalable, and secure communication network infrastructure for Simhastha 2028.

The communication network shall serve as the backbone infrastructure for:

- surveillance systems,
- ICCC operations,
- AI analytics,
- Digital Twin platform,
- public communication systems,
- emergency response systems,
- traffic systems,
- and all integrated field infrastructure.

The network shall support uninterrupted transmission of:

- video feeds,
- analytics data,
- operational data,
- voice/data traffic,
- and command & control communication.

The proposed architecture shall follow:

- ring-based redundancy,
- hybrid OFC + RF architecture,
- distributed aggregation,
- low-latency communication,
- and high availability design principles.

#### 8.2 Objectives

The objectives of the communication network include:

- high-speed data connectivity,
- resilient network operations,
- low-latency video transmission,

- uninterrupted ICCC operations,
- scalable future-ready infrastructure,
- and secure communication architecture.

### **8.3 Network Architecture**

#### **8.3.1 Overall Architecture**

The communication network shall comprise:

- OFC backbone network,
- RF/microwave backup network,
- field aggregation network,
- core network infrastructure,
- edge connectivity infrastructure,
- and network management systems.

The architecture shall support centralized monitoring, distributed field operations, failover capability, and network redundancy.

#### **8.3.2 Ring Topology**

The OFC backbone shall preferably be designed in ring topology, dual-ring topology, or equivalent resilient architecture.

The network shall support automatic failover, alternate routing, and minimal service interruption in case of fiber/network failure.

#### **8.3.3 Redundancy Requirements**

The network shall support redundancy at core level, aggregation level, power level, communication path level, and critical field locations.

#### **8.3.4 Hybrid Connectivity**

The network architecture shall support OFC as primary communication medium, RF/microwave/wireless links as backup, and alternate communication paths for critical infrastructure.

### **8.4 OFC Backbone Infrastructure**

#### **8.4.1 Scope**

The SI shall survey, design, lay, terminate, splice, test, commission, and maintain the OFC backbone infrastructure.

#### **8.4.2 OFC Deployment Areas**

The OFC backbone shall cover ICCC, Mela Area, ghats, roads, parking areas, holding areas, major intersections, control points, viewing centres, and critical operational locations.

#### **8.4.3 OFC Specifications**

The OFC network shall support high-bandwidth video transmission, support future scalability, support redundant routing, and comply with applicable standards.

The SI shall use outdoor armoured OFC, HDPE ducting, and industrial-grade accessories suitable for outdoor deployment.

#### **8.4.4 OFC Laying Methodology**

The SI shall undertake trenching, HDD (where required), duct laying, reinstatement, route marking, and restoration works.

The SI shall ensure minimal disruption to public infrastructure, traffic management during execution, and compliance with applicable standards and permissions.

#### **8.4.5 Splicing & Termination**

The SI shall undertake proper OFC splicing, provide OFDFs, undertake route testing, and maintain acceptable optical loss parameters.

#### **8.4.6 OFC Protection Measures**

The SI shall provide route markers, warning tapes, protection pipes, chamber protection, and mechanical protection for OFC routes.

#### **8.4.7 OFC Testing**

The SI shall conduct OTDR testing, optical power testing, continuity testing, and acceptance testing.

Test reports shall be submitted to USCL.

### **8.5 Active Network Infrastructure**

#### **8.5.1 Scope**

The SI shall supply, install, configure and maintain all active network components including core switches, aggregation switches, edge switches, routers, wireless equipment, network security appliances, and associated accessories.

#### **8.5.2 Core Network**

The core network shall support high-throughput operations, support redundant architecture, support low latency, and support centralized management.

The core network shall support high-capacity video traffic, analytics traffic, and operational data traffic.

#### **8.5.3 Aggregation Network**

The aggregation layer shall aggregate field traffic, support resilient routing, support ring architecture, and support QoS mechanisms.

#### **8.5.4 Edge Network**

The edge network shall support camera connectivity, field device connectivity, edge analytics, and distributed field operations.

#### **8.5.5 Industrial Network Components**

All field-level network equipment shall be industrial-grade, support outdoor deployment, support extended operating temperatures, and support surge protection.

### **8.6 Wireless & RF Infrastructure**

### **8.6.1 Scope**

The SI shall provide wireless/RF connectivity infrastructure wherever OFC connectivity is infeasible, temporary, or required as backup.

### **8.6.2 RF/Microwave Links**

The wireless infrastructure shall support point-to-point connectivity, point-to-multipoint connectivity, backup communication, and resilient network architecture.

### **8.6.3 Outdoor Wi-Fi Infrastructure**

The SI may provide outdoor Wi-Fi infrastructure for field operations, operational connectivity, temporary operational areas, and approved public utility applications.

## **8.7 Enterprise Radio / Wireless Communication System**

The scope shall also include integration/provisioning of enterprise field communication systems including wireless handheld communication devices, command communication consoles, and interoperable radio communication support for coordinated field operations during Simhastha.

This will cover:

- digital wireless communication,
- handheld radios,
- command communication consoles,
- repeater/base stations,
- interoperability,
- emergency communication,
- GPS-enabled radios (optional),
- group communication,
- and integration with ICCC.

## **8.8 Network Performance Requirements**

### **8.8.1 Bandwidth**

The network shall support adequate bandwidth for HD video streams, AI analytics, Digital Twin operations, and concurrent ICCC operations.

The SI shall undertake detailed bandwidth sizing during design stage.

### **8.8.2 Latency**

The network shall support low-latency video transmission, real-time analytics communication, and operational responsiveness suitable for ICCC operations.

### **8.8.3 Quality of Service (QoS)**

The network shall support QoS policies for video traffic, critical alerts, operational data, and emergency communication.

### **8.8.4 Network Availability**

The communication network shall support high availability architecture, failover mechanisms, and uninterrupted operations during peak event periods.

## **8.9 Network Management System (NMS)**

### **8.9.1 Scope**

The SI shall provide centralized Network Management System (NMS) for monitoring and management of network devices, bandwidth utilization, connectivity status, link health, and network events.

### **8.9.2 Functional Requirements**

The NMS shall support topology visualization, fault monitoring, event correlation, alert generation, reporting, and centralized diagnostics.

### **8.9.3 Monitoring**

The NMS shall support real-time monitoring, bandwidth monitoring, link monitoring, device health monitoring, and network utilization analytics.

## **8.10 Cybersecurity Requirements**

### **8.10.1 Secure Network Architecture**

The communication network shall support network segmentation, VLAN architecture, secure routing, secure remote access, and controlled network access.

### **8.10.2 Security Controls**

The SI shall implement firewalls, IDS/IPS, secure authentication, secure device configuration, and cybersecurity hardening.

### **8.10.3 Compliance**

The network architecture shall comply with:

- CERT-In guidelines,
- Government cybersecurity advisories,
- and applicable standards.

## **8.11 Power & Environmental Requirements**

### **8.11.1 Power Backup**

Critical network infrastructure shall support UPS backup, surge protection, and stable operations during power fluctuations.

### **8.11.2 Environmental Protection**

Field network infrastructure shall support outdoor operations, dust protection, weather protection, and thermal protection.

## **8.12 Integration Requirements**

The communication network shall support seamless integration with:

- ICCC systems,



- surveillance systems,
- AI analytics,
- Digital Twin platform,
- emergency systems,
- public communication systems,
- and approved third-party systems.

### **8.13 Testing & Acceptance**

#### **8.13.1 Testing Requirements**

The SI shall conduct:

- OFC testing,
- bandwidth testing,
- failover testing,
- redundancy testing,
- latency testing,
- and operational stress testing.

#### **8.13.2 Acceptance Testing**

Acceptance testing shall include:

- network performance validation,
- failover validation,
- operational load testing,
- and integrated system testing.

### **8.14 Restoration & Maintenance**

#### **8.14.1 Fault Restoration**

The SI shall maintain defined restoration timelines for OFC cuts, network device failures, connectivity loss, and critical communication failures.

#### **8.14.2 Preventive Maintenance**

The SI shall undertake preventive maintenance, route inspection, cleaning, firmware upgrades, and proactive monitoring.

### **8.15 Documentation Requirements**

The SI shall provide network architecture diagrams, route maps, OFC layouts, IP addressing plans, rack layouts, configuration documents, and as-built drawings.

### **8.16 SLA Requirements**

The communication network shall support:

- minimum 99.5% uptime during event period,
- low-latency operations,
- rapid fault restoration,
- and uninterrupted operations during major snan days.

Peak snan days shall be treated as critical operational periods requiring enhanced SLA compliance.

#### **8.17 Future Readiness**

The proposed communication network shall support future scalability, support onboarding of additional cameras and devices, support future smart city applications, and support evolving operational requirements without major redesign.

## SECTION 9: CYBERSECURITY FRAMEWORK

### 9. CYBERSECURITY FRAMEWORK

#### 9.1 Overview

The System Integrator (SI) shall design, implement, integrate, operate and maintain a comprehensive cybersecurity framework for the ICCC ecosystem of Simhastha 2028.

The cybersecurity framework shall ensure confidentiality, integrity, availability, resilience, and secure operation of all project infrastructure including surveillance systems, communication network, ICCC infrastructure, AI Analytics Platform, Digital Twin Platform, VMS, storage systems, applications, APIs, databases, cloud/on-prem infrastructure, and integrated third-party systems.

The cybersecurity architecture shall follow defense-in-depth principles, zero-trust security concepts, layered security controls, secure access mechanisms, continuous monitoring, and proactive threat management.

#### 9.2 Objectives

The objectives of the cybersecurity framework include:

- protection of critical infrastructure,
- prevention of unauthorized access,
- secure transmission of operational data,
- cyber threat detection,
- incident response readiness,
- operational continuity,
- and compliance with Government cybersecurity guidelines.

#### 9.3 General Requirements

##### 9.3.1 Security by Design

The entire ICCC ecosystem shall follow secure-by-design principles, least privilege access, secure configuration practices, and layered security architecture.

Cybersecurity shall be integrated at network layer, application layer, endpoint layer, device layer, and operational layer.

##### 9.3.2 Standards & Compliance

The cybersecurity framework shall comply with:

- CERT-In guidelines,
- applicable Government of India cybersecurity advisories,
- MeitY guidelines,
- ISO 27001 principles,
- and applicable industry best practices.

### **9.3.3 Security Governance**

The SI shall establish cybersecurity governance mechanisms, security policies, operational security procedures, incident response procedures, and access management procedures.

## **9.4 Network Security**

### **9.4.1 Secure Network Architecture**

The network shall support segmented architecture, VLAN-based isolation, secure routing, network zoning, and controlled communication pathways.

Critical systems shall be logically segregated including ICCC systems, surveillance systems, AI systems, Digital Twin platform, and external/public networks.

### **9.4.2 Firewall Systems**

The SI shall deploy enterprise-grade firewall systems supporting traffic filtering, application control, policy management, threat prevention, and secure access control.

### **9.4.3 IDS/IPS**

The SI shall implement Intrusion Detection Systems (IDS), Intrusion Prevention Systems (IPS), anomaly detection, and threat monitoring mechanisms.

### **9.4.4 Secure Remote Access**

Remote access mechanisms shall support secure VPN connectivity, multi-factor authentication, encrypted sessions, and role-based access control.

### **9.4.5 Secure Communication**

All communication channels shall support encrypted transmission, secure protocols, secure API communication, and secure data exchange mechanisms.

## **9.5 Endpoint & Device Security**

### **9.5.1 Endpoint Protection**

The SI shall implement endpoint protection mechanisms for servers, workstations, operator consoles, field devices, and other connected systems.

### **9.5.2 Device Hardening**

All systems and devices shall be securely configured, hardened against vulnerabilities, stripped of unnecessary services, and protected against unauthorized access.

### **9.5.3 Camera Security**

The surveillance ecosystem shall support secure camera authentication, encrypted communication, firmware security, password management, and secure onboarding.

### **9.5.4 IoT Security**

IoT and field devices shall support secure device communication, device authentication, secure provisioning, and controlled network access.

## **9.6 Identity & Access Management (IAM)**

### **9.6.1 User Authentication**

The system shall support secure authentication, centralized user management, password policies, and configurable authentication mechanisms.

#### **9.6.2 Multi-Factor Authentication (MFA)**

Critical administrative and remote access functions shall support multi-factor authentication, secure login mechanisms, and enhanced access security.

#### **9.6.3 Role-Based Access Control (RBAC)**

The system shall support granular RBAC, least privilege access, department-wise access, operator-level permissions, and hierarchical authorization.

#### **9.6.4 Audit Logging**

The system shall maintain user activity logs, access logs, configuration change logs, administrative logs, and security event logs.

### **9.7 Security Monitoring & Incident Management**

#### **9.7.1 Security Monitoring**

The SI shall implement centralized security monitoring for network traffic, devices, applications, user activities, and security events.

#### **9.7.2 SIEM Integration**

The cybersecurity framework shall support SIEM integration, event correlation, centralized log management, and security analytics.

#### **9.7.3 Security Operations Support**

The SI shall provide security monitoring support, threat alerting, incident reporting, and escalation mechanisms.

#### **9.7.4 Incident Response**

The SI shall establish cybersecurity incident response procedures, incident classification, escalation workflows, containment procedures, and recovery mechanisms.

### **9.8 Application Security**

#### **9.8.1 Secure Application Architecture**

All applications and platforms shall support secure coding practices, secure APIs, secure authentication, session security, and input validation.

#### **9.8.2 API Security**

All APIs shall support authentication, authorization, encryption, rate limiting, and audit logging.

#### **9.8.3 Web Security**

Web-based platforms shall support protection against unauthorized access, injection attacks, session hijacking, cross-site scripting, and other common web vulnerabilities.

### **9.9 Data Security & Privacy**

#### **9.9.1 Data Protection**

The SI shall implement mechanisms for data confidentiality, integrity protection, secure storage, secure backup, and controlled access.

#### **9.9.2 Encryption**

Sensitive data shall support encryption in transit, encryption at rest, and secure key management mechanisms.

#### **9.9.3 Privacy Controls**

The system shall support controlled access to surveillance data, privacy-aware operational access, auditability, and secure data handling practices.

#### **9.9.4 Data Retention**

Data retention policies shall comply with project requirements, operational policies, and applicable Government guidelines.

### **9.10 Vulnerability Assessment & Security Testing**

#### **9.10.1 Vulnerability Assessment**

The SI shall conduct periodic vulnerability assessments, security audits, and remediation activities.

#### **9.10.2 Penetration Testing**

The SI shall conduct VAPT, network penetration testing, application security testing, and remediation verification.

#### **9.10.3 Security Hardening Validation**

The SI shall validate device hardening, server hardening, application hardening, and network hardening.

### **9.11 Backup, Recovery & Business Continuity**

#### **9.11.1 Backup Mechanisms**

The SI shall implement data backup systems, configuration backups, secure backup storage, and backup verification mechanisms.

#### **9.11.2 Disaster Recovery**

The cybersecurity framework shall support disaster recovery integration, failover mechanisms, operational continuity, and recovery procedures.

#### **9.11.3 Business Continuity**

The SI shall establish business continuity procedures, recovery workflows, and operational continuity planning.

### **9.12 Third-Party & Integration Security**

#### **9.12.1 Third-Party Integration Security**

All third-party integrations shall support secure API integration, controlled access, auditability, and cybersecurity compliance.

#### **9.12.2 Private CCTV Integration Security**

Private CCTV integration shall support consent-based onboarding, secure connectivity, access control, and segregated operational access.

### **9.13 Security Logging & Audit Trails**

#### **9.13.1 Logging Requirements**

The system shall maintain logs for user activity, access attempts, administrative actions, security events, system failures, and operational incidents.

#### **9.13.2 Log Retention**

Security logs shall support configurable retention and archival policies.

#### **9.13.3 Auditability**

The system shall support audit trails, forensic investigation support, and event traceability.

### **9.14 Training & Awareness**

#### **9.14.1 Security Training**

The SI shall provide cybersecurity awareness and operational security training for:

- ICCC operators,
- administrators,
- technical teams,
- and authorized stakeholders.

#### **9.14.2 Incident Handling Training**

Training shall include cyber incident reporting, response workflows, escalation procedures, and operational best practices.

### **9.15 Documentation Requirements**

The SI shall provide cybersecurity architecture documents, security policies, incident response plans, hardening guidelines, access control procedures, VAPT reports, and audit documentation.

### **9.16 Testing & Acceptance**

#### **9.16.1 Security Testing**

The SI shall conduct security validation, access control testing, failover testing, penetration testing, and incident response validation.

#### **9.16.2 Acceptance Criteria**

Cybersecurity acceptance shall include successful VAPT closure, security configuration validation, audit compliance, and operational security verification.

#### **9.16.3 SLA Requirements**

The cybersecurity framework shall support continuous monitoring, defined response timelines, incident escalation, and operational security support during event period.

Major snan days shall be treated as critical operational periods requiring enhanced security monitoring.

### **9.17 OEM & Support Requirements**

All cybersecurity components shall be OEM-backed, support enterprise-grade deployment, provide updates and patches, and support long-term operational maintenance.

OEM authorization and support commitment shall be mandatory.

### **9.18 Future Readiness**

The proposed cybersecurity architecture shall support future expansion, support additional integrations, support evolving cyber threat landscapes, and support future smart city operational requirements without major redesign.



## SECTION 10: DATA CENTER / DISASTER RECOVERY / STORAGE

### 10. DATA CENTER / DISASTER RECOVERY / STORAGE

#### 10.1 Overview

The System Integrator (SI) shall design, supply, install, configure, integrate, test, commission, operate and maintain a secure, scalable, resilient, and high-availability Data Center (DC), Disaster Recovery (DR), and Storage infrastructure for the ICCC ecosystem of Simhastha 2028.

The DC/DR infrastructure shall support:

- surveillance systems,
- Video Management System (VMS),
- AI Analytics Platform,
- Digital Twin & Decision Intelligence Platform,
- ICCC applications,
- GIS systems,
- databases,
- communication systems,
- reporting systems,
- and integrated operational platforms.

The architecture shall support:

- uninterrupted operations,
- centralized data management,
- high-volume video ingestion,
- failover capability,
- disaster recovery,
- operational continuity,
- cybersecurity compliance,
- and future scalability.

The proposed infrastructure shall follow:

- hybrid architecture principles,
- virtualization-based deployment,
- centralized management,
- and enterprise-grade redundancy mechanisms.

#### 10.2 Objectives

The objectives of the DC/DR infrastructure include:

- reliable data storage,
- secure operational data management,
- uninterrupted ICCC operations,
- high-performance video recording,
- disaster resilience,
- business continuity,
- and future-ready scalable infrastructure.

### **10.3 Architecture Requirements**

#### **10.3.1 Deployment Model**

The proposed architecture may support on-premise deployment, cloud-assisted deployment, hybrid deployment, or equivalent enterprise architecture,

subject to approval of USCL and applicable Government guidelines.

#### **10.3.2 Hybrid Architecture**

The proposed solution shall support centralized data center architecture, edge recording capability, distributed field storage where required, and centralized archival and analytics processing.

#### **10.3.3 Scalability**

The infrastructure shall:

- initially support operations for approximately 2,600–2,800 cameras,
- support future expansion up to minimum 4,000 cameras,
- support additional AI workloads,
- support additional applications,
- and support future smart city integrations without major redesign.

#### **10.3.4 High Availability**

The architecture shall support redundant compute infrastructure, redundant storage architecture, redundant networking, failover mechanisms, and uninterrupted operations.

No single point of failure shall exist for critical systems.

### **10.4 Data Center Infrastructure**

#### **10.4.1 Scope**

The SI shall provide compute infrastructure, virtualization infrastructure, storage infrastructure, networking infrastructure, rack infrastructure, power infrastructure, and management systems required for ICCC operations.

#### **10.4.2 Compute Infrastructure**

The compute infrastructure shall support VMS operations, AI analytics workloads, Digital Twin platform, GIS applications, databases, operational applications, and future expansion.

The compute architecture shall support virtualization, clustering, GPU-enabled processing where required, and high-performance operations.

#### **10.4.3 Virtualization Infrastructure**

The SI shall provide enterprise-grade virtualization infrastructure supporting server virtualization, resource pooling, workload balancing, failover capability, and centralized management.

#### **10.4.4 Rack Infrastructure**

The SI shall provide standard enterprise racks, cable management, structured power distribution, environmental management, and organized equipment layouts.

#### **10.4.5 Environmental Controls**

The data center environment shall support cooling systems, temperature management, humidity control, fire suppression, access control, and environmental monitoring.

### **10.5 Storage Infrastructure**

#### **10.5.1 Scope**

The SI shall provide centralized storage infrastructure supporting:

- surveillance video storage,
- AI analytics data,
- Digital Twin data,
- operational databases,
- application data,
- backups,
- and archival storage.

#### **10.5.2 Storage Architecture**

The storage architecture shall support centralized storage, scalable storage expansion, RAID protection, high-throughput video recording, and enterprise-grade storage management.

The architecture shall support structured data, unstructured data, video data, analytics metadata, and archival data.

#### **10.5.3 Video Retention**

The storage infrastructure shall support:

- minimum **60 days** video retention,
- extendable up to 90 days for critical feeds,
- configurable retention policies,
- and selective archival mechanisms.

#### **10.5.4 Edge Recording**

The architecture shall support edge recording at camera level where required, recording synchronization, automatic recovery, and centralized archival.

#### **10.5.5 Storage Performance**

The storage system shall support simultaneous recording, playback, analytics processing, and concurrent multi-user access.

The storage shall support high write throughput, rapid retrieval, and operational responsiveness.

#### **10.5.6 Data Protection**

The storage infrastructure shall support RAID protection, redundancy, snapshots, backup integration, and data integrity mechanisms.

### **10.6 Disaster Recovery (DR)**

#### **10.6.1 Scope**

The SI shall provide Disaster Recovery (DR) infrastructure and operational mechanisms for ensuring continuity of critical ICCC operations.

#### **10.6.2 DR Architecture**

The DR architecture shall support failover operations, replication, redundancy, backup systems, and continuity of critical services.

#### **10.6.3 DR Site**

The DR setup may utilize cloud-based DR, secondary DC integration, or equivalent approved architecture.

The DR architecture shall comply with operational resilience requirements, cybersecurity requirements, and Government guidelines.

#### **10.6.4 Replication**

The DR architecture shall support data replication, application replication, configuration replication, and recovery workflows.

#### **10.6.5 Recovery Objectives**

The SI shall propose suitable:

- Recovery Point Objective (RPO),
- and Recovery Time Objective (RTO)

for critical systems.

Critical operational systems shall support rapid recovery mechanisms.

#### **10.6.6 DR Testing**

The SI shall conduct DR drills, failover testing, recovery validation, and operational continuity testing.

### **10.7 Backup Infrastructure**

#### **10.7.1 Backup Mechanisms**

The SI shall provide automated backup systems, backup scheduling, backup monitoring, and backup verification mechanisms.

#### **10.7.2 Backup Scope**

The backup system shall support application backups, configuration backups, database backups, operational data backups, and critical video archival.

#### **10.7.3 Backup Retention**

The backup architecture shall support configurable backup retention policies as per operational requirements.

### **10.8 Database Infrastructure**

#### **10.8.1 Database Support**

The infrastructure shall support operational databases, analytics databases, GIS databases, metadata storage, and application databases.

#### **10.8.2 Database High Availability**

The database architecture shall support redundancy, failover, replication, and backup mechanisms.

### **10.9 Network Integration**

The DC/DR infrastructure shall integrate seamlessly with ICCC systems, surveillance systems, AI Analytics Platform, Digital Twin platform, GIS systems, communication network, and approved third-party systems.

### **10.10 Cybersecurity Requirements**

#### **10.10.1 Secure Architecture**

The DC/DR infrastructure shall support secure access, network segregation, secure management, and controlled administrative access.

#### **10.10.2 Security Controls**

The SI shall implement firewalls, access controls, SIEM integration, logging, encryption, and security monitoring.

#### **10.10.3 Compliance**

The DC/DR architecture shall comply with:

- CERT-In guidelines,
- MeitY advisories,
- Government cybersecurity policies,
- and industry best practices.

### **10.11 Monitoring & Management**

#### **10.11.1 Infrastructure Monitoring**

The SI shall provide centralized monitoring for compute infrastructure, storage infrastructure, network infrastructure, backup systems, virtualization systems, and environmental systems.

### **10.11.2 Alerting**

The system shall support automated alerts, fault notifications, capacity alerts, performance alerts, and operational health monitoring.

### **10.11.3 Reporting**

The infrastructure shall support utilization reports, storage reports, backup reports, operational health reports, and audit reports.

## **10.12 Testing & Acceptance**

### **10.12.1 Testing**

The SI shall conduct performance testing, storage testing, failover testing, DR testing, backup validation, and stress testing.

### **10.12.2 Acceptance Criteria**

Acceptance testing shall include operational validation, storage validation, DR validation, failover validation, and integrated system testing.

## **10.13 Documentation Requirements**

The SI shall provide architecture diagrams, storage sizing documents, backup procedures, DR procedures, rack layouts, IP addressing plans, operational manuals, and as-built documentation.

## **10.14 SLA Requirements**

The DC/DR infrastructure shall support:

- minimum 99.5% uptime during event period,
- uninterrupted recording operations,
- rapid recovery capability,
- and operational continuity during major snan days.

Peak snan days shall be treated as critical operational periods requiring enhanced operational readiness.

## **10.15 Training & Knowledge Transfer**

The SI shall provide training for administrators, ICCC operators, technical teams, and authorized personnel

covering infrastructure operations, backup management, DR operations, storage administration, and troubleshooting.

## **10.16 OEM & Support Requirements**

All DC/DR/storage components shall be OEM-backed, support enterprise-grade operations, support long-term upgrades, and provide technical support during the contract period.

OEM authorization and support commitment shall be mandatory.

## **10.17 Future Readiness**

The proposed DC/DR/storage infrastructure shall support future expansion, support onboarding of additional systems, support future smart city applications, and support evolving operational requirements without major redesign.

## SECTION 11: ICCC, MINI WAR-ROOM & VIEWING CENTERS

### 11. ICCC, MINI WAR-ROOM & VIEWING CENTERS

#### 11.1 Overview

The System Integrator (SI) shall design, supply, install, integrate, test, commission, operationalize and maintain an enterprise-grade Integrated Command & Control Centre (ICCC) ecosystem for Simhastha 2028.

The ICCC ecosystem shall comprise:

- Primary ICCC,
- Secondary/Backup ICCC integration,
- Mini War-Room at Ranoji ki Chhatri,
- Remote Viewing Centers,
- and associated operational infrastructure.

The ICCC ecosystem shall function as the centralized operational platform for surveillance monitoring, crowd management, traffic monitoring, emergency coordination, incident management, AI-driven operational intelligence, Digital Twin operations, and multi-agency command & coordination.

The ICCC architecture shall support real-time operations, multi-agency coordination, high availability, operational scalability, redundancy, cybersecurity, and future smart city integrations.

#### 11.2 Objectives

The objectives of the ICCC ecosystem include:

- centralized operational monitoring,
- integrated event management,
- predictive operational intelligence,
- rapid incident response,
- coordinated emergency management,
- operational decision support,
- and enterprise-grade command operations.

#### 11.3 ICCC Architecture

##### 11.3.1 Enterprise ICCC Model

The ICCC ecosystem shall follow centralized command architecture, distributed viewing capability, integrated data visualization, multi-agency operational workflows, and scalable enterprise architecture.

##### 11.3.2 Components



The ICCC ecosystem shall broadly include Primary ICCC, Secondary/Backup ICCC integration, Mini War-Room, Viewing Centers, Video Wall systems, Operator consoles, Collaboration systems, AV systems, Incident Management Systems, Decision Support Systems, dispatcher console, communication gateway, emergency communication integration and associated infrastructure.

#### **11.4 Primary ICCC**

##### **11.4.1 Scope**

The SI shall establish and operationalize the Primary ICCC at designated location(s) identified by USCL.

The ICCC shall function as the principal operational command center for Simhastha 2028.

##### **11.4.2 Functional Areas**

The ICCC shall support surveillance monitoring, AI analytics monitoring, Digital Twin operations, GIS operations, traffic monitoring, emergency coordination, multi-agency coordination, and executive decision support.

##### **11.4.3 ICCC Infrastructure**

The SI shall provide operator consoles, supervisory consoles, video wall systems, workstations, AV systems, display systems, collaboration systems, communication systems, and associated infrastructure.

##### **11.4.4 Operator Capacity**

The Primary ICCC shall support approximately 40+ operator positions, supervisory workstations, and executive monitoring positions.

The final seating plan shall be approved by USCL/ Mela Authority.

##### **11.4.5 Video Wall System**

The ICCC shall include enterprise-grade video wall infrastructure supporting:

- multi-source visualization,
- dynamic layouts,
- AI alert visualization,
- GIS integration,
- and centralized operational monitoring.

The video wall system shall support:

- redundant controllers,
- centralized management,
- and uninterrupted operations.

##### **11.4.6 Dashboard Integration**

The ICCC shall support integrated dashboards for surveillance, AI analytics, Digital Twin, traffic management, incident management, and emergency response operations.

#### **11.4.7 Collaboration Facilities**

The ICCC shall support inter-agency collaboration, video conferencing, briefing facilities, incident coordination, and operational review meetings.

### **11.5 Secondary / Backup ICCC**

#### **11.5.1 Scope**

The SI shall integrate and operationalize Secondary/Backup ICCC functionality utilizing existing Smart City ICCC infrastructure or other designated facilities, wherever applicable.

#### **11.5.2 Functional Requirements**

The Secondary ICCC shall support operational redundancy, failover operations, backup monitoring, emergency operational continuity, and alternate command capability.

#### **11.5.3 Synchronization**

The Secondary ICCC shall support real-time synchronization, mirrored operational capability, and continuity of critical operational systems.

### **11.6 Mini War-Room at Ranoji ki Chhatri**

#### **11.6.1 Scope**

The SI shall establish and operationalize a temporary/rental Mini War-Room at Ranoji ki Chhatri during the event period.

The Mini War-Room shall function as a localized field coordination and rapid response command facility.

#### **11.6.2 Seating Capacity**

The Mini War-Room shall support:

- approximately 20 operational seats,
- supervisory seating,
- and collaborative operational coordination.

#### **11.6.3 Functional Requirements**

The Mini War-Room shall support localized surveillance monitoring, field coordination, rapid incident management, emergency response coordination, and operational communication.

#### **11.6.4 Infrastructure**

The SI shall provide operator workstations, display systems, communication systems, AV systems, networking, collaboration facilities, and temporary operational infrastructure.

#### **11.6.5 Integration**

The Mini War-Room shall integrate seamlessly with Primary ICCC, AI Analytics Platform, Digital Twin platform, GIS systems, and communication systems.

#### **11.6.6 Rental Model**

The Mini War-Room may be deployed on rental basis, temporary deployment basis, or equivalent operational model

for approximately **9 months** or as directed by USCL/Mela Authority.

## **11.7 Viewing Centers**

### **11.7.1 Scope**

The SI shall establish and operationalize approximately 10 Viewing Centers at locations identified by USCL.

### **11.7.2 Purpose**

Viewing Centers shall support distributed monitoring, executive monitoring, agency coordination, situational awareness, and operational review.

### **11.7.3 Proposed Locations**

Viewing Centers may be established at:

- Collectorate,
- Police Control Room,
- State-level monitoring centers (2 Nos),
- enroute district monitoring centers,
- and other approved locations.

Final locations shall be approved by USCL.

### **11.7.4 Infrastructure**

Each Viewing Center shall support display systems, operator workstations, video feeds, dashboard access, communication systems, and secure network connectivity.

### **11.7.5 Integration**

Viewing Centers shall integrate with ICCC, VMS, AI Analytics Platform, Digital Twin, and operational dashboards.

## **11.8 Control Room Design & Interiors**

### **11.8.1 Design Standards**

The ICCC ecosystem shall follow:

- enterprise-grade control room standards,
- ergonomic design principles,
- operational efficiency principles,
- and safety standards.

The design may align with:

- ISO 11064 principles,
- industry best practices,

- and approved operational standards.

### **11.8.2 Interior Infrastructure**

The SI shall provide modular interiors, acoustic treatment, anti-static flooring, cable management, lighting systems, HVAC integration, and operator-friendly layouts.

### **11.8.3 Material Requirements**

The SI shall use fire-resistant materials, durable industrial-grade materials, and operationally suitable infrastructure.

## **11.9 Workstations & Operator Consoles**

### **11.9.1 Operator Consoles**

The SI shall provide enterprise-grade operator consoles supporting:

- 24×7 operations,
- ergonomic usage,
- cable management,
- and integrated operational workflows.

### **11.9.2 Workstations**

The workstations shall support VMS operations, AI analytics, Digital Twin visualization, GIS operations, dashboard monitoring, and operational applications.

### **11.9.3 Display Systems**

The ICCC ecosystem shall support large display systems, multi-monitor operations, and high-resolution operational visualization.

## **11.10 Audio-Visual & Collaboration Systems**

### **11.10.1 AV Infrastructure**

The SI shall provide AV systems, presentation systems, audio systems, and collaboration systems.

### **11.10.2 Video Conferencing**

The ICCC ecosystem shall support multi-agency video conferencing, operational briefings, and remote coordination.

### **11.11 Communication Systems**

The ICCC ecosystem shall support secure communication, operational coordination, voice/data integration, and emergency communication workflows.

## **11.12 Operational Software & Dashboards**

The ICCC ecosystem shall support unified operational dashboards, GIS-based operational visualization, incident management, AI-driven alerts, Digital Twin operations, and decision support workflows.

## **11.13 Power & Environmental Infrastructure**

### **11.13.1 Power Backup**

Critical ICCC infrastructure shall support UPS backup, surge protection, and uninterrupted operations.

#### **11.13.2 Environmental Controls**

The ICCC shall support cooling systems, environmental monitoring, fire suppression, and operational safety systems.

#### **11.14 Security & Access Control**

##### **11.14.1 Physical Security**

The ICCC ecosystem shall support access control, visitor management, surveillance, and operational security.

##### **11.14.2 Cybersecurity**

The ICCC ecosystem shall comply with cybersecurity policies, secure access mechanisms, and operational security requirements.

#### **11.15 Integration Requirements**

The ICCC ecosystem shall support seamless integration with VMS, AI Analytics Platform, Digital Twin platform, GIS systems, communication systems, emergency systems, and approved third-party platforms.

#### **11.16 Testing & Acceptance**

##### **11.16.1 Testing**

The SI shall conduct operational testing, AV testing, failover testing, integrated dashboard testing, and operational simulation testing.

##### **11.16.2 Acceptance Criteria**

Acceptance testing shall include functionality validation, visualization validation, integration validation, and operational readiness verification.

#### **11.17 Documentation Requirements**

The SI shall provide seating layouts, rack layouts, AV architecture, network diagrams, operational manuals, SOP documents, and as-built drawings.

#### **11.18 SLA Requirements**

The ICCC ecosystem shall support:

- minimum 99.5% uptime during event period,
- uninterrupted operational monitoring,
- rapid incident handling,
- and operational continuity during major snan days.

Major snan days shall be treated as critical operational periods requiring enhanced operational readiness.

#### **11.19 Training & Capacity Building**

The SI shall provide training for ICCC operators, administrators, police personnel, and stakeholder agencies covering:

- ICCC operations,
- dashboard usage,
- incident management,
- collaboration workflows,
- and operational coordination.

#### **11.20 OEM & Support Requirements**

All ICCC components shall be OEM-backed, support enterprise-grade operations, support long-term upgrades, and provide technical support during the contract period.

OEM authorization and support commitment shall be mandatory.

#### **11.21 Future Readiness**

The ICCC ecosystem shall support future expansion, support additional integrations, support future smart city applications, and support evolving operational requirements without major redesign.

## SECTION 12: FIELD INFRASTRUCTURE

### 12. FIELD INFRASTRUCTURE

#### 12.1 Overview

The System Integrator (SI) shall design, engineer, supply, install, integrate, test, commission, operate and maintain all field infrastructure required for deployment and operation of the ICCC ecosystem for Simhastha 2028.

The field infrastructure shall support surveillance systems, communication network, AI analytics, Digital Twin operations, public communication systems, field connectivity, and associated operational infrastructure.

The field infrastructure shall include, but not be limited to poles and mounting structures, OFC infrastructure, field network infrastructure, power infrastructure, UPS systems, outdoor cabinets, junction boxes, civil works, earthing, lightning protection, temporary deployment infrastructure, and associated accessories.

The infrastructure shall support permanent deployment, temporary/rental deployment, high availability, operational safety, scalability, and harsh outdoor operational conditions.

#### 12.2 Objectives

The objectives of the field infrastructure include reliable field deployment, stable communication backbone, uninterrupted surveillance operations, resilient outdoor infrastructure, rapid deployment capability, operational safety, and scalable infrastructure support.

#### 12.3 General Requirements

##### 12.3.1 Deployment Philosophy

The field infrastructure shall support hybrid deployment model, permanent infrastructure, temporary event-period infrastructure, modular deployment, and scalable architecture.

##### 12.3.2 Environmental Suitability

All field infrastructure shall be suitable for outdoor operations, dust-prone conditions, high-temperature conditions, temporary event environments, and continuous operations during Simhastha period.

##### 12.3.3 Structural Safety

All field infrastructure shall comply with structural safety requirements, electrical safety requirements, applicable standards, and operational safety practices.

#### 12.4 Poles & Mounting Infrastructure

##### 12.4.1 Scope

The SI shall provide poles, mounting structures, brackets, foundations, and associated accessories required for installation of cameras, communication devices, RF equipment, public communication systems, and associated field infrastructure.

##### 12.4.2 Pole Types

The deployment may include permanent poles, temporary poles, portable poles, telescopic poles, and customized mounting structures.

#### **12.4.3 Pole Specifications**

The poles shall be industrial-grade, weather-resistant, corrosion-resistant, structurally stable, and suitable for outdoor deployment.

#### **12.4.4 Temporary Pole Infrastructure**

Temporary/rental poles shall support rapid deployment, easy relocation, stable installation, and operational flexibility during event period.

The temporary pole infrastructure shall preferably support non-intrusive or minimal civil foundation works, modular assembly, and quick dismantling after event period.

#### **12.4.5 Pole Height & Placement**

Pole heights and placement shall be based on coverage requirements, camera field of view, crowd management requirements, traffic visibility, and site conditions.

Final placement shall be approved by USCL after detailed survey.

#### **12.4.6 Mounting Structures**

The SI shall provide camera mounting brackets, PTZ mounting structures, RF antenna mounts, equipment mounting accessories, and vibration-resistant supports.

### **12.5 OFC Field Infrastructure**

#### **12.5.1 Scope**

The SI shall provide all field-level OFC infrastructure required for connectivity of cameras, field devices, aggregation points, viewing centers, and operational nodes.

#### **12.5.2 OFC Components**

The SI shall provide OFC cables, HDPE ducts, OFC chambers, OFDFs, patch cords, splice enclosures, and associated accessories.

#### **12.5.3 OFC Protection**

The SI shall provide warning tapes, protection pipes, route markers, cable protection mechanisms, and route protection systems.

#### **12.5.4 OFC Route Restoration**

The SI shall restore roads, footpaths, pavements, and affected infrastructure after OFC deployment as per applicable standards and directions of authorities.

### **12.6 Field Network Infrastructure**

#### **12.6.1 Scope**

The SI shall provide field-level networking infrastructure including edge switches, industrial switches, field routers, wireless devices, RF equipment, and associated connectivity infrastructure.

#### **12.6.2 Outdoor Network Equipment**



All field network devices shall be industrial-grade, weatherproof, surge-protected, and suitable for outdoor deployment.

### **12.6.3 Field Connectivity**

The field connectivity architecture shall support OFC connectivity, RF connectivity, microwave connectivity, wireless backup, and hybrid communication architecture.

### **12.6.4 Redundancy**

Critical field nodes shall support communication redundancy, failover capability, and alternate connectivity paths.

## **12.7 Power Infrastructure**

### **12.7.1 Scope**

The SI shall provide complete field-level power infrastructure required for operation of surveillance systems, field network infrastructure, public communication systems, and associated field devices.

### **12.7.2 Components**

The power infrastructure shall include power cabling, distribution systems, field power panels, SMPS systems, protection systems, and associated accessories.

### **12.7.3 Power Source Coordination**

The SI shall coordinate with relevant authorities/agencies for power availability, temporary power arrangements, and operational power connectivity.

### **12.7.4 Surge Protection**

All field infrastructure shall support surge protection, voltage protection, and electrical protection mechanisms.

## **12.8 UPS & Backup Power Systems**

### **12.8.1 Scope**

The SI shall provide UPS and backup power infrastructure for critical field devices and systems.

### **12.8.2 Functional Requirements**

The backup power systems shall support uninterrupted operations, temporary power failure handling, controlled shutdown, and operational continuity.

### **12.8.3 Backup Duration**

Critical field infrastructure shall support minimum backup duration as per operational requirements and approved design.

### **12.8.4 Field UPS Infrastructure**

The SI shall provide outdoor UPS systems, industrial batteries, enclosure protection, and monitoring capability.

## **12.9 Outdoor Cabinets & Junction Boxes**

### **12.9.1 Scope**

The SI shall provide outdoor cabinets and junction boxes for field deployment.

#### **12.9.2 Requirements**

The outdoor cabinets shall support equipment protection, cable management, power distribution, environmental protection, and operational safety.

#### **12.9.3 Environmental Rating**

Outdoor cabinets and junction boxes shall support weather protection, dust protection, water resistance, and operational suitability for outdoor conditions.

### **12.10 Earthing & Lightning Protection**

#### **12.10.1 Scope**

The SI shall provide complete earthing and lightning protection systems for all field infrastructure.

#### **12.10.2 Earthing Requirements**

The earthing system shall support equipment protection, personnel safety, surge protection, and stable operations.

#### **12.10.3 Lightning Protection**

Critical field infrastructure shall support lightning arrestors, surge suppressors, and protection mechanisms.

### **12.11 Civil & Foundation Works**

#### **12.11.1 Scope**

The SI shall undertake all civil works required for pole foundations, equipment installation, OFC route works, mounting infrastructure, and associated field deployment.

#### **12.11.2 Restoration**

The SI shall restore all affected infrastructure after completion of work.

#### **12.11.3 Safety During Execution**

The SI shall ensure barricading, public safety, traffic management, warning signage, and safe execution practices.

### **12.12 Temporary/Rental Infrastructure**

#### **12.12.1 Scope**

The SI shall provide temporary/rental field infrastructure for event-specific deployment, temporary surveillance locations, temporary parking areas, holding areas, and surge operational zones.

#### **12.12.2 Temporary Deployment Requirements**

The temporary infrastructure shall support rapid deployment, modularity, scalability, easy relocation, and operational flexibility.

#### **12.12.3 Dismantling & Restoration**

The SI shall dismantle temporary infrastructure after completion of event period and restore affected locations.

### **12.13 Field Asset Management**

#### **12.13.1 Asset Tagging**

The SI shall maintain asset inventory, GIS-tagged asset records, and asset management database.

#### **12.13.2 Health Monitoring**

The SI shall support monitoring of field devices, power systems, UPS systems, network connectivity, and operational status.

### **12.14 Integration Requirements**

The field infrastructure shall support seamless integration with ICCC, VMS, AI Analytics Platform, Digital Twin platform, communication network, and approved third-party systems.

### **12.15 Testing & Acceptance**

#### **12.15.1 Testing**

The SI shall conduct structural testing, electrical testing, OFC testing, network testing, power testing, and integrated operational testing.

#### **12.15.2 Acceptance Criteria**

Acceptance testing shall include infrastructure validation, connectivity validation, power validation, and operational readiness verification.

### **12.16 Documentation Requirements**

The SI shall provide pole layout drawings, OFC route drawings, electrical diagrams, field infrastructure drawings, as-built documentation, GIS-tagged infrastructure records, and maintenance manuals.

### **12.17 SLA Requirements**

The field infrastructure shall support uninterrupted operations, defined restoration timelines, rapid fault resolution, and operational continuity during major snan days.

Critical operational zones shall receive priority maintenance support during peak event periods.

### **12.18 Training & Knowledge Transfer**

The SI shall provide training for field teams, maintenance personnel, technical teams, and authorized stakeholders covering infrastructure maintenance, fault handling, power systems, and operational safety.

### **12.19 OEM & Support Requirements**

All field infrastructure components shall be OEM-backed where applicable, support enterprise-grade deployment, support long-term operations, and provide technical support during the contract period.

### **12.20 Future Readiness**

The proposed field infrastructure shall support future expansion, support onboarding of additional systems, support future smart city applications, and support evolving operational requirements without major redesign.

## SECTION 13: SLA & OPERATIONS AND MAINTENANCE (O&M)

### 13. SLA & OPERATIONS AND MAINTENANCE (O&M)

#### 13.1 Overview

The System Integrator (SI) shall provide comprehensive Operations & Maintenance (O&M) services for all project components deployed under the ICCC ecosystem.

The O&M obligations shall include preventive maintenance, corrective maintenance, field support, application support, software support, cybersecurity support, operational support, manpower deployment, monitoring services, reporting, and SLA compliance management.

The O&M services shall cover:

- Permanent Infrastructure (CAPEX Assets),
- Temporary/Rental Infrastructure,
- ICCC operations,
- communication network,
- surveillance systems,
- AI Analytics Platform,
- Digital Twin platform,
- and all integrated systems.

#### 13.2 O&M Period

##### 13.2.1 Permanent Infrastructure

The SI shall provide comprehensive O&M support for all permanent infrastructure for **60 months (5 years)**.

from the date of successful Go-Live / Final Acceptance Certificate (FAC), unless otherwise specified.

##### 13.2.2 Temporary/Rental Infrastructure

The SI shall provide comprehensive O&M support for all temporary/rental infrastructure for approximately **9 months** or as directed by USCL, including:

- deployment period,
- operational period,
- peak snan operations,
- and dismantling support period.

#### 13.3 Scope of O&M Services

##### 13.3.1 General Scope

The SI shall provide end-to-end O&M services including monitoring, maintenance, repairs, replacement, software support, updates, fault management, incident management, and operational assistance.

### **13.3.2 Coverage**

The O&M scope shall include:

- surveillance systems,
- VMS,
- AI Analytics Platform,
- Digital Twin platform,
- ICCC infrastructure,
- communication network,
- OFC infrastructure,
- power systems,
- UPS systems,
- field infrastructure,
- viewing centers,
- war-room infrastructure,
- and associated software/hardware systems.

### **13.4 O&M Responsibilities of SI**

The SI shall be fully responsible for system uptime, operational continuity, preventive maintenance, fault rectification, spare management, manpower deployment, OEM coordination, cybersecurity monitoring, reporting, and SLA compliance.

### **13.5 Preventive Maintenance**

#### **13.5.1 Scope**

The SI shall undertake scheduled preventive maintenance for all project components.

#### **13.5.2 Activities**

Preventive maintenance shall include equipment inspection, cleaning, firmware updates, health checks, configuration verification, calibration, battery inspection, and network diagnostics.

#### **13.5.3 Maintenance Schedule**

The SI shall prepare preventive maintenance schedules, inspection schedules, and maintenance records.

Preventive maintenance shall not disrupt critical operations.

### **13.6 Corrective Maintenance**

#### **13.6.1 Scope**

The SI shall provide corrective maintenance for hardware failures, software failures, communication failures, field equipment failures, and operational incidents.

#### **13.6.2 Replacement Responsibility**

The SI shall replace defective hardware, faulty components, failed devices, and damaged equipment without additional cost during applicable O&M period, except in cases attributable to force majeure or wilful damage by third parties.

### **13.7 ICCC Operations Support**

#### **13.7.1 Operational Assistance**

The SI shall provide operational support for ICCC operations, dashboard monitoring, surveillance operations, AI alert management, Digital Twin operations, and incident management.

#### **13.7.2 Event-Period Operations**

The SI shall ensure:

- 24x7 operational support,
- enhanced manpower deployment,
- rapid escalation,
- and operational continuity during major snan days.

### **13.8 Manpower Deployment**

#### **13.8.1 Manpower Requirement**

The System Integrator (SI) shall deploy qualified, competent, experienced, and adequately trained personnel for successful implementation, operations, maintenance, cybersecurity management, AI analytics operations, Digital Twin operations, network management, and overall project execution.

The manpower deployed by the SI shall be dedicated for the Project and shall possess qualifications and relevant experience commensurate with the complexity and criticality of the ICCC ecosystem for Simhastha 2028.

The minimum qualification and experience requirements specified below are indicative minimum requirements and the SI shall ensure deployment of adequately skilled personnel necessary for successful and uninterrupted operation of the Project.

#### **13.8.2 Minimum Qualification & Experience Requirements for Key Personnel**

| <b>SNo.</b> | <b>Position</b>              | <b>Minimum Qualification</b>            | <b>Minimum Experience</b> | <b>Key Responsibilities</b>      |
|-------------|------------------------------|-----------------------------------------|---------------------------|----------------------------------|
| 1           | Project Director             | B.E./B.Tech/MCA/M.Tech                  | 15 Years                  | Overall Project Oversight        |
| 2           | Project Manager              | B.E./B.Tech + PMP/Prince2 preferred     | 10 Years                  | End-to-End Project Management    |
| 3           | ICCC Operations Manager      | Graduate/Engineer                       | 8 Years                   | ICCC Operations & Coordination   |
| 4           | Network & Communication Lead | B.E./B.Tech + CCNP equivalent preferred | 8 Years                   | Network & OFC Management         |
| 5           | Cybersecurity Lead           | B.E./B.Tech + CEH/CISSP preferred       | 8 Years                   | Security Operations & Compliance |

|    |                            |                                              |         |                                |
|----|----------------------------|----------------------------------------------|---------|--------------------------------|
| 6  | AI Analytics Lead          | AI/ML/Data Science qualification             | 7 Years | AI Analytics Operations        |
| 7  | Digital Twin/GIS Expert    | GIS/Geo-Informatics qualification            | 7 Years | Digital Twin & GIS Operations  |
| 8  | VMS Expert                 | Relevant certification preferred             | 5 Years | VMS Administration             |
| 9  | Data Center/Cloud Expert   | Cloud/Virtualization certification preferred | 7 Years | DC/DR Operations               |
| 10 | Field Deployment Lead      | Diploma/B.E./B.Tech                          | 5 Years | Field Deployment & Maintenance |
| 11 | Helpdesk/Support Engineers | Diploma/Graduate                             | 3 Years | Incident Management            |
| 12 | Field Technicians          | ITI/Diploma                                  | 2 Years | Field Support                  |
| 13 | Shift Supervisors          | Graduate/Diploma                             | 5 Years | Shift Coordination             |

Authority reserves the right to interview, verify, accept, reject, or seek replacement of any proposed Key Personnel during evaluation or implementation stage.

The Authority reserves the right to seek replacement of any personnel deployed by the SI who is found incompetent, underperforming, lacking required qualifications, involved in misconduct, or unsuitable for Project operations. The SI shall replace such personnel within timelines specified by the Authority without additional cost implication.

The SI shall ensure continuity of key personnel during critical implementation and operational phases including major snan days and high-footfall periods.

### **13.8.3 Shift Operations**

During operational period, especially major snan days, the SI shall provide:

- 24x7 shift operations,
- adequate standby manpower,
- rapid-response teams,
- and escalation support.

### **13.8.4 Government/User Personnel**

USCL and stakeholder agencies may deploy supervisory personnel, monitoring personnel, police representatives, emergency coordinators, and operational officers for integrated operations.

The SI shall provide necessary operational support and system access to authorized personnel.

## **13.9 Network & OFC Maintenance**

### **13.9.1 OFC Maintenance**

The SI shall maintain OFC network, duct infrastructure, splicing, route integrity, and communication continuity.

### **13.9.2 OFC Restoration**

The SI shall maintain dedicated restoration teams for OFC cuts, communication failures, and critical link restoration.

### **13.9.3 Network Monitoring**

The SI shall provide centralized network monitoring, fault diagnostics, bandwidth monitoring, and proactive fault management.

## **13.10 Spare Management**

### **13.10.1 Spare Inventory**

The SI shall maintain adequate spare inventory for cameras, switches, storage systems, UPS systems, communication equipment, and critical components.

### **13.10.2 Critical Spares**

Critical spares shall be maintained locally during event period for rapid restoration.

## **13.11 Cybersecurity Operations**

### **13.11.1 Security Monitoring**

The SI shall provide cybersecurity monitoring, threat detection, security alerting, and incident escalation.

### **13.11.2 Patch Management**

The SI shall ensure firmware updates, security patches, vulnerability remediation, and system hardening.

## **13.12 Helpdesk & Support System**

### **13.12.1 Helpdesk**

The SI shall establish centralized helpdesk support for fault reporting, escalation, incident management, and operational coordination.

### **13.12.2 Ticketing System**

The SI shall provide ticket logging, fault tracking, escalation tracking, closure records, and SLA monitoring.

## **13.13 SLA Parameters**

### **13.13.1 General**

The SI shall comply with all SLA requirements specified in the RFP and Contract Agreement.

SLA compliance shall be monitored continuously.

## **13.14 Availability Requirements**

| <b>Component</b>  | <b>Minimum Availability Requirement</b> |
|-------------------|-----------------------------------------|
| ICCC Core Systems | 99.5%                                   |
| VMS Platform      | 99.5%                                   |



|                                |       |
|--------------------------------|-------|
| AI Analytics Platform          | 99.5% |
| Digital Twin Platform          | 99.5% |
| Communication Network          | 99.5% |
| Video Wall System              | 99.0% |
| Core Storage Systems           | 99.5% |
| Critical Cameras (Major Ghats) | 98%   |
| Overall Surveillance Network   | 97%   |

### 13.15 Incident Classification

| Severity | Description                                 | Examples                              |
|----------|---------------------------------------------|---------------------------------------|
| Critical | Complete failure impacting major operations | ICCC outage, major network failure    |
| Major    | Partial operational impact                  | Video wall failure, analytics failure |
| Minor    | Limited operational impact                  | Individual camera/device failure      |
| Low      | Cosmetic/non-critical issues                | Dashboard formatting issues           |

### 13.16 Response & Resolution Timelines

| Severity | Response Time  | Resolution Time |
|----------|----------------|-----------------|
| Critical | 5 Minutes      | 1 Hours         |
| Major    | 15 Minutes     | 2 Hours         |
| Minor    | 2 Hours        | 12 Hours        |
| Low      | 1 Business Day | 3 Business Days |

### 13.17 OFC Restoration SLA

| Type                   | Restoration Timeline |
|------------------------|----------------------|
| Critical OFC Route     | Within 2 Hours       |
| Non-Critical OFC Route | Within 6 Hours       |

### 13.18 Peak Snan Day SLA

#### 13.18.1 Critical Operations Period

Major snan days shall be treated as critical operational periods, zero-compromise operational windows, and enhanced SLA enforcement periods.

#### 13.18.2 Enhanced Deployment

The SI shall deploy additional manpower, standby devices, mobile maintenance teams, rapid response teams, and OEM escalation support during major snan days.

### 13.19 Penalty Mechanism

#### 13.19.1 SLA Penalties

Non-compliance with SLA requirements shall attract penalties.

The penalty framework may include uptime penalties, delayed restoration penalties, operational failure penalties, and repeated incident penalties.

#### **13.19.2 Severe Operational Failure**

Repeated critical failures, major outages, or operational negligence may attract enhanced penalties, recovery from payments, performance security invocation, or termination actions.

### **13.20 Reporting Requirements**

#### **13.20.1 Operational Reports**

The SI shall submit daily reports, incident reports, uptime reports, maintenance reports, and SLA compliance reports.

#### **13.20.2 Event Reports**

Special operational reports shall be submitted during major snan days, emergency situations, and peak operational periods.

### **13.21 Asset Management**

The SI shall maintain asset inventory, GIS-tagged asset records, maintenance history, warranty records, and operational logs.

### **13.22 Knowledge Transfer & Handover**

At completion/termination of contract, the SI shall hand over configurations, documentation, licenses, operational records, asset records, and system knowledge to USCL or authorized agency.

### **13.23 Documentation Requirements**

The SI shall maintain maintenance logs, incident records, configuration records, backup records, and operational documentation.

### **13.24 Audit & Performance Review**

USCL may conduct operational audits, SLA audits, security audits, infrastructure inspections, and performance reviews.

The SI shall provide full cooperation during such reviews.

### **13.25 Exit Management**

The SI shall support smooth transition, operational continuity, data migration, and knowledge transfer during contract completion or termination.

### **13.26 Future Readiness**

The O&M framework shall support future expansion, onboarding of additional systems, evolving operational requirements, and future smart city integration needs.

## SECTION 14: IMPLEMENTATION SCHEDULE & DELIVERABLES

### 14. IMPLEMENTATION SCHEDULE & DELIVERABLES

#### 14.1 Overview

The System Integrator (SI) shall undertake end-to-end implementation of the ICCC ecosystem for Simhastha 2028 within the timelines prescribed in this RFP and subsequent Contract Agreement.

The implementation shall include survey, planning, design, supply, installation, integration, testing, commissioning, trial runs, Go-Live, operations, and maintenance.

The implementation schedule shall be designed to ensure:

- timely operational readiness,
- adequate stabilization period before Simhastha 2028,
- successful peak-load readiness,
- and uninterrupted operations during event period.

#### 14.2 Implementation Philosophy

The implementation approach shall follow:

- milestone-based execution,
- phased deployment,
- integrated testing,
- operational validation,
- and progressive commissioning methodology.

The SI shall ensure:

- parallel execution of activities wherever feasible,
- coordination with multiple agencies,
- and minimal disruption to public infrastructure and city operations.

#### 14.3 Overall Project Timelines

##### 14.3.1 Project Duration

The implementation timeline shall broadly comprise:

- implementation phase,
- stabilization phase,
- operational phase,
- and O&M phase.

##### 14.3.2 Tentative Timeline

The tentative implementation schedule may broadly include:

| Sl. No. | Milestone                               | Tentative Timeline                          |
|---------|-----------------------------------------|---------------------------------------------|
| 1       | Letter of Award (LoA)                   | T                                           |
| 2       | Contract Agreement Signing              | T + 15 Days                                 |
| 3       | Project Kick-Off                        | T + 15 Days                                 |
| 4       | Detailed Survey & Design                | T + 60 Days                                 |
| 5       | Submission of Detailed Design Documents | T + 75 Days                                 |
| 6       | Approval of Design Documents            | T + 90 Days                                 |
| 7       | Procurement & Supply Commencement       | T + 90 Days                                 |
| 8       | Field Infrastructure Deployment         | T + 180 Days                                |
| 9       | OFC & Network Deployment                | T + 210 Days                                |
| 10      | ICCC Infrastructure Readiness           | T + 240 Days                                |
| 11      | Surveillance System Deployment          | T + 270 Days                                |
| 12      | AI & Digital Twin Integration           | T + 300 Days                                |
| 13      | Integrated System Testing               | T + 330 Days                                |
| 14      | Trial Runs & Operational Simulation     | T + 360 Days                                |
| 15      | Go-Live & Operational Readiness         | As directed by USCL prior to Simhastha 2028 |
| 16      | O&M Commencement                        | Post Go-Live                                |

The timelines may be revised by USCL depending upon project requirements and operational considerations.

#### **14.4 Implementation Phases**

##### **14.4.1 Phase-I: Survey & Planning**

The SI shall undertake:

- site surveys,
- route surveys,
- infrastructure assessment,
- camera planning,
- bandwidth assessment,
- power assessment,
- GIS mapping,
- and deployment planning.

##### **14.4.2 Phase-II: Detailed Design & Engineering**

The SI shall prepare:

- detailed architecture,
- network design,

- OFC layouts,
- field deployment plans,
- ICCC layouts,
- integration architecture,
- cybersecurity architecture,
- and implementation methodology.

#### **14.4.3 Phase-III: Procurement & Supply**

The SI shall:

- procure all approved components,
- ensure OEM authorization,
- ensure quality compliance,
- and maintain delivery schedules.

#### **14.4.4 Phase-IV: Field Deployment**

The SI shall undertake:

- OFC deployment,
- field infrastructure installation,
- pole installation,
- power infrastructure deployment,
- camera installation,
- and communication infrastructure deployment.

#### **14.4.5 Phase-V: ICCC & Platform Deployment**

The SI shall:

- establish ICCC infrastructure,
- deploy VMS,
- deploy AI Analytics Platform,
- deploy Digital Twin platform,
- and establish operational dashboards.

#### **14.4.6 Phase-VI: Integration & Testing**

The SI shall undertake:

- system integration,
- interoperability testing,
- failover testing,

- cybersecurity testing,
- and integrated operational testing.

#### **14.4.7 Phase-VII: Trial Run & Simulation**

The SI shall conduct:

- mock drills,
- operational simulation,
- crowd simulation,
- peak-load simulation,
- and emergency response testing.

#### **14.4.8 Phase-VIII: Go-Live & Stabilization**

The SI shall:

- operationalize the system,
- provide enhanced support,
- monitor stabilization,
- and rectify deficiencies before event operations.

### **14.5 Detailed Deliverables**

#### **14.5.1 Survey Deliverables**

The SI shall submit:

- site survey reports,
- OFC route survey reports,
- GIS-tagged deployment plans,
- power availability assessment,
- and infrastructure feasibility reports.

#### **14.5.2 Design Deliverables**

The SI shall submit:

- High-Level Design (HLD),
- Low-Level Design (LLD),
- network architecture,
- cybersecurity architecture,
- storage sizing,
- compute sizing,
- rack layouts,

- and integration design documents.

#### **14.5.3 Field Infrastructure Deliverables**

The SI shall deliver:

- OFC infrastructure,
- poles and mounting structures,
- power systems,
- UPS systems,
- field cabinets,
- and associated infrastructure.

#### **14.5.4 Surveillance Deliverables**

The SI shall deploy:

- fixed cameras,
- PTZ cameras,
- panoramic cameras,
- thermal cameras,
- ANPR systems,
- drone integration,
- body cameras,
- and water surveillance systems.

#### **14.5.5 ICCC Deliverables**

The SI shall deliver:

- ICCC infrastructure,
- video wall systems,
- operator consoles,
- AV systems,
- viewing centers,
- and mini war-room infrastructure.

#### **14.5.6 Platform Deliverables**

The SI shall deliver:

- VMS platform,
- AI Analytics Platform,
- Digital Twin platform,

- GIS integration,
- dashboards,
- reporting systems,
- and workflow systems.

#### **14.5.7 Cybersecurity Deliverables**

The SI shall deliver:

- firewall systems,
- IDS/IPS,
- security configurations,
- SIEM integration,
- VAPT reports,
- and cybersecurity documentation.

#### **14.5.8 Documentation Deliverables**

The SI shall provide:

- architecture documents,
- as-built drawings,
- asset inventory,
- SOP documents,
- operational manuals,
- maintenance manuals,
- training manuals,
- and backup/DR procedures.

### **14.6 Project Management & Governance**

#### **14.6.1 Project Management Office (PMO)**

The SI shall establish a dedicated PMO for implementation management, stakeholder coordination, schedule management, risk management, and reporting.

#### **14.6.2 Project Manager**

The SI shall deploy a dedicated Project Manager responsible for overall execution, coordination, milestone achievement, and escalation management.

#### **14.6.3 Review Meetings**

The SI shall participate in:

- weekly review meetings,
- milestone review meetings,



- coordination meetings,
- and progress review meetings.

## **14.7 Progress Reporting**

### **14.7.1 Reports**

The SI shall submit

- weekly progress reports,
- monthly progress reports,
- issue logs,
- risk registers,
- and mitigation reports.

### **14.7.2 Dashboards**

The SI shall maintain project monitoring dashboards showing progress status, milestone status, risks, delays, and corrective actions.

## **14.8 Dependency & Coordination Management**

The SI shall coordinate with USCL, District Administration, Police, utility agencies, transport agencies, and other stakeholder departments for smooth execution.

## **14.9 Quality Assurance & Quality Control**

### **14.9.1 QA/QC Framework**

The SI shall establish QA/QC procedures for material inspection, installation quality, testing procedures, and operational validation.

### **14.9.2 Inspection Rights**

USCL or authorized representatives may inspect equipment, deployment sites, documentation, and testing activities at any stage.

### **14.10 Delay & Recovery Mechanism**

#### **14.10.1 Delay Responsibility**

The SI shall be responsible for timely completion of all milestones.

#### **14.10.2 Recovery Plan**

In case of delay, the SI shall submit recovery plans, accelerated deployment plans, and corrective action measures.

#### **14.10.3 Liquidated Damages**

Delay in milestone completion may attract liquidated damages, milestone payment withholding, and other contractual remedies.

## **14.11 Testing & Acceptance Milestones**

### **14.11.1 FAT**

The SI shall conduct Factory Acceptance Testing (FAT) before deployment wherever applicable.

#### **14.11.2 SAT**

The SI shall conduct Site Acceptance Testing (SAT) after installation.

#### **14.11.3 UAT**

The SI shall conduct User Acceptance Testing (UAT) with USCL and authorized stakeholders.

#### **14.11.4 Integrated Operational Testing**

The SI shall conduct integrated platform testing, peak-load simulation, failover testing, and emergency response simulation.

#### **14.12 Training Deliverables**

The SI shall provide operator training, administrator training, cybersecurity awareness training, field maintenance training, and operational SOP training.

#### **14.13 Go-Live Criteria**

Go-Live shall be subject to:

- successful completion of testing,
- operational readiness validation,
- resolution of critical deficiencies,
- and approval by USCL.

#### **14.14 Stabilization Support**

The SI shall provide enhanced stabilization support after Go-Live including dedicated manpower, rapid response teams, OEM support, and operational monitoring.

#### **14.15 Asset Handover**

The SI shall submit asset inventory, GIS-tagged asset database, warranty records, license details, and ownership transfer documentation.

#### **14.16 Exit Deliverables**

Upon completion/termination of contract, the SI shall provide final documentation, operational records, backups, configurations, and transition support.

#### **14.17 Future Scalability**

The implementation architecture and deliverables shall support future expansion, onboarding of additional systems, future smart city integration, and evolving operational requirements without major redesign.

## SECTION 15: ACCEPTANCE TESTING

### 15. ACCEPTANCE TESTING

#### 15.1 Overview

The System Integrator (SI) shall undertake comprehensive testing, validation, simulation, trial runs, operational readiness assessment, and acceptance procedures for all components of the ICCC ecosystem before Go-Live.

Acceptance testing shall ensure that:

- all systems perform as per specifications,
- all integrations function seamlessly,
- operational objectives are achieved,
- resilience and failover mechanisms function correctly,
- and the overall ICCC ecosystem is fully prepared for large-scale event operations during Simhastha 2028.

Acceptance testing shall include:

- Factory Acceptance Testing (FAT),
- Site Acceptance Testing (SAT),
- User Acceptance Testing (UAT),
- Integrated System Testing,
- Cybersecurity Testing,
- Failover Testing,
- Stress Testing,
- Peak-Load Simulation,
- Mock Drills,
- and Operational Trial Runs.

#### 15.2 Objectives

The objectives of acceptance testing include:

- validation of functional requirements,
- validation of technical specifications,
- operational readiness verification,
- integration validation,
- resilience validation,
- cybersecurity validation,
- and multi-agency operational preparedness.

### **15.3 General Requirements**

#### **15.3.1 Responsibility**

The SI shall be fully responsible for preparation of test plans, test execution, coordination, rectification of defects, re-testing, documentation, and demonstration of compliance.

#### **15.3.2 Approval**

All testing procedures, simulation plans, and acceptance criteria shall be approved by USCL prior to execution.

#### **15.3.3 Stakeholder Participation**

Acceptance testing may involve participation from USCL, District Administration, Police Department, Mela Authority, Fire Department, SDRF/NDRF, Transport Authorities, and other designated agencies.

### **15.4 Testing Stages**

#### **15.4.1 Factory Acceptance Testing (FAT)**

The SI shall conduct FAT for critical components prior to deployment wherever applicable.

#### **15.4.2 Site Acceptance Testing (SAT)**

The SI shall conduct SAT after installation and integration of systems at site.

#### **15.4.3 User Acceptance Testing (UAT)**

The SI shall conduct UAT in coordination with USCL and authorized stakeholders to validate functionality, operational workflows, dashboards, alerts, reporting, and integrated operations.

#### **15.4.4 Integrated System Testing**

The SI shall conduct end-to-end integrated testing of surveillance systems, ICCC, AI Analytics Platform, Digital Twin platform, communication network, cybersecurity systems, and all integrated applications.

### **15.5 Test Documentation**

#### **15.5.1 Test Plans**

The SI shall prepare detailed test plans, test procedures, acceptance criteria, simulation plans, and execution methodology.

#### **15.5.2 Test Reports**

The SI shall submit test reports, defect logs, rectification reports, simulation reports, and compliance reports.

### **15.6 Functional Testing**

#### **15.6.1 Surveillance Testing**

The SI shall test camera functionality, PTZ operations, panoramic visualization, thermal imaging, ANPR functionality, underwater surveillance, drone integration, and video quality.

#### **15.6.2 VMS Testing**

The SI shall test live monitoring, playback, recording, failover, event handling, GIS integration, and alarm workflows.

#### **15.6.3 AI Analytics Testing**

The SI shall validate crowd density analytics, people counting, reverse flow detection, queue analytics, heatmaps, intrusion detection, fire/smoke detection, and predictive alerts.

#### **15.6.4 Digital Twin Testing**

The SI shall validate GIS visualization, simulation engine, crowd forecasting, congestion prediction, evacuation modelling, and operational dashboards.

#### **15.6.5 ICCC Testing**

The SI shall validate video wall operations, operator consoles, viewing centers, mini war-room, AV systems, dashboards, and collaboration systems.

### **15.7 Communication Network Testing**

#### **15.7.1 OFC Testing**

The SI shall conduct OTDR testing, link testing, optical loss testing, and route validation.

#### **15.7.2 Network Testing**

The SI shall validate bandwidth, latency, packet loss, redundancy, QoS, and network failover.

#### **15.7.3 Wireless/RF Testing**

The SI shall validate RF links, microwave links, wireless failover, and operational continuity.

### **15.8 Cybersecurity Testing**

#### **15.8.1 Vulnerability Assessment**

The SI shall conduct vulnerability assessment, hardening validation, and remediation verification.

#### **15.8.2 Penetration Testing**

The SI shall conduct network penetration testing, application penetration testing, API testing, and access control validation.

#### **15.8.3 Security Validation**

The SI shall validate RBAC, MFA, encryption, secure access, audit logging, and cybersecurity monitoring.

### **15.9 Failover & Redundancy Testing**

#### **15.9.1 Failover Simulation**

The SI shall conduct failover simulations for network failure, storage failure, server failure, communication failure, and ICCC operational failure.

#### **15.9.2 Redundancy Validation**

The SI shall validate redundancy mechanisms, automatic failover, data replication, and operational continuity.

### **15.10 Performance & Stress Testing**

#### **15.10.1 Load Testing**

The SI shall conduct high-load testing, concurrent video stream testing, analytics load testing, and storage stress testing.

#### **15.10.2 Peak Event Simulation**

The SI shall simulate peak snan-day load conditions, surge crowd conditions, high-alert operational conditions, and emergency operational scenarios.

#### **15.10.3 Scalability Validation**

The SI shall validate scalability, concurrent user operations, system responsiveness, and operational stability under peak load.

### **15.11 Operational Trial Runs**

#### **15.11.1 Mandatory Trial Runs**

The SI shall conduct rigorous operational trial runs prior to Go-Live.

The trial runs shall include field operations, ICCC operations, integrated monitoring, emergency workflows, and multi-agency coordination.

#### **15.11.2 Duration**

The trial run period shall be of sufficient duration as determined by USCL to validate operational readiness.

#### **15.11.3 Operational Validation**

The SI shall demonstrate uninterrupted operations, stable monitoring, operational responsiveness, and coordinated command workflows.

### **15.12 Simulation Exercises**

#### **15.12.1 Crowd Surge Simulation**

The SI shall conduct crowd surge simulation for major ghats, congregation zones, and high-density routes.

#### **15.12.2 Stampede-Risk Simulation**

The SI shall simulate:

- reverse flow conditions,
- crowd bottlenecks,
- congestion buildup,
- and crowd diversion workflows.

#### **15.12.3 Traffic Congestion Simulation**

The SI shall simulate:

- traffic buildup,
- parking overflow,

- holding area congestion,
- and diversion planning.

#### **15.12.4 Emergency Evacuation Simulation**

The SI shall conduct evacuation drills, route optimization validation, emergency corridor testing, and safe-zone simulations.

#### **15.12.5 Disaster Response Simulation**

The SI shall simulate fire incidents, communication failures, flooding/water emergencies, infrastructure failures, and multi-location emergencies.

#### **15.12.6 Multi-Agency Mock Drills**

The SI shall coordinate and support mock drills involving:

- Police,
- Fire Services,
- SDRF/NDRF,
- Health Department,
- Administration,
- and other agencies.

### **15.13 AI & Digital Twin Simulation Testing**

#### **15.13.1 Predictive Analytics Validation**

The SI shall validate congestion forecasting, crowd trend prediction, and predictive alert generation.

#### **15.13.2 Simulation Accuracy**

The SI shall demonstrate operational usefulness of simulations, event correlation, and actionable operational outputs.

#### **15.13.3 Decision Workflow Validation**

The SI shall validate SOP-driven alerts, escalation workflows, and automated operational recommendations.

### **15.14 Acceptance Criteria**

#### **15.14.1 General Criteria**

Acceptance shall be based on successful completion of tests, compliance with specifications, operational readiness, and satisfactory performance during simulations.

#### **15.14.2 Defect Rectification**

All identified defects shall be rectified by the SI before final acceptance.

#### **15.14.3 Re-Testing**

USCL may require re-testing after rectification of deficiencies.

### **15.15 Go-Live Approval**

Go-Live approval shall be granted only after successful completion of acceptance testing, successful operational simulations, satisfactory trial runs, and approval by USCL.

#### **15.16 Final Acceptance Certificate (FAC)**

FAC shall be issued only after successful completion of all testing, stabilization, operational validation, and compliance with contractual obligations.

#### **15.17 Documentation Deliverables**

The SI shall submit test reports, simulation reports, failover reports, VAPT reports, operational readiness reports, defect closure reports, and acceptance compliance documents.

#### **15.18 Independent Verification**

USCL reserves the right to appoint third-party auditors, conduct independent validation, witness simulations, and verify operational readiness.

#### **15.19 Penalty for Failed Acceptance**

Failure to achieve acceptance criteria may result in:

- delayed Go-Live approval,
- re-testing requirements,
- milestone payment withholding,
- penalties,
- or other contractual remedies.

#### **15.20 Future Readiness Validation**

The SI shall demonstrate that the system architecture supports future scalability, onboarding of additional devices, future integrations, and operational expansion without major redesign.



## SECTION 16: TECHNICAL SPECIFICATIONS

### 16. TECHNICAL SPECIFICATIONS

#### 16.1 Overview

This section defines the minimum functional and technical requirements for the ICCC ecosystem for Simhastha 2028.

The specifications provided herein are:

- indicative minimum requirements,
- functional in nature,
- technology-neutral wherever feasible,
- and intended to ensure interoperability, scalability, operational resilience, and enterprise-grade performance.

The bidder may propose:

- equivalent or higher specifications,
- enhanced enterprise features,
- and future-ready architecture,

subject to compliance with the minimum requirements of this RFP.

#### 16.2 General Technical Requirements

##### 16.2.1 Open Architecture

The proposed solution shall:

- support open standards,
- support interoperability,
- support multi-OEM integration,
- avoid vendor lock-in,
- and support future expansion.

##### 16.2.2 Scalability

The proposed architecture shall support minimum 30% future scalability, onboarding of additional devices, onboarding of additional applications, and future smart city integrations without major redesign.

##### 16.2.3 Environmental Suitability

All field devices and outdoor infrastructure shall be industrial-grade, weather-resistant, dust-resistant, and suitable for continuous outdoor operations.

##### 16.2.4 Power Protection

All critical field infrastructure shall support surge protection, voltage protection, earthing, and power backup mechanisms.

### 16.2.5 Cybersecurity

All systems shall support secure authentication, encrypted communication, access control, audit logging, and cybersecurity hardening.

## 16.3 Master Compliance Matrix

### 16.3.1 Compliance Requirement

The bidder shall submit a detailed compliance matrix against each specification in the following format:

| SNo | Specification Reference | Requirement | Compliance (Yes/No) | Offered Specification | Deviation, if any | Supporting Document Reference |
|-----|-------------------------|-------------|---------------------|-----------------------|-------------------|-------------------------------|
| 1   |                         |             |                     |                       |                   |                               |
| 2   |                         |             |                     |                       |                   |                               |
| 3   |                         |             |                     |                       |                   |                               |
| .   |                         |             |                     |                       |                   |                               |
| .   |                         |             |                     |                       |                   |                               |

### 16.3.2 Supporting Documents

The bidder shall submit:

- OEM datasheets,
- architecture documents,
- brochures,
- certificates,
- and technical compliance documents

supporting the offered solution.

## 16.4 Surveillance System Specifications

### 16.4.1 Fixed/Bullet/Box IP Cameras

| Parameter             | Minimum Requirement         |
|-----------------------|-----------------------------|
| Camera Type           | Enterprise-grade IP Camera  |
| Resolution            | Minimum 4 MP                |
| Compression           | H.264/H.265 or better       |
| Day/Night             | Supported                   |
| WDR                   | Supported                   |
| IR Illumination       | Supported                   |
| Low-Light Performance | Supported                   |
| Analytics Support     | Motion/Tamper/Event support |

|                  |                        |
|------------------|------------------------|
| Protection       | IP66/IP67 and IK-rated |
| Protocol Support | ONVIF compliant        |
| Mounting         | Outdoor suitable       |

#### 16.4.2 PTZ Cameras

| Parameter             | Minimum Requirement |
|-----------------------|---------------------|
| Resolution            | Minimum 4 MP        |
| Optical Zoom          | Minimum 25x         |
| Rotation              | 360° continuous     |
| Auto Tracking         | Supported           |
| Preset/Tour           | Supported           |
| IR Support            | Supported           |
| Low-Light Support     | Supported           |
| Analytics Integration | Supported           |
| Protocol Support      | ONVIF compliant     |

#### 16.4.3 Panoramic Cameras

| Parameter          | Minimum Requirement |
|--------------------|---------------------|
| Coverage           | 180°/360°           |
| Multi-Sensor       | Supported           |
| De-Warping         | Supported           |
| Simultaneous Views | Supported           |
| Crowd Monitoring   | Supported           |
| ONVIF Support      | Mandatory           |

#### 16.4.4 Thermal Cameras

| Parameter             | Minimum Requirement |
|-----------------------|---------------------|
| Thermal Imaging       | Supported           |
| Optical + Thermal     | Preferred           |
| Fire/Smoke Detection  | Supported           |
| Long Range Monitoring | Supported           |
| Outdoor Rating        | Industrial grade    |

#### 16.4.5 ANPR Cameras

| Parameter           | Minimum Requirement |
|---------------------|---------------------|
| Vehicle Recognition | Supported           |
| Multi-Lane Support  | Supported           |

|                       |                                       |
|-----------------------|---------------------------------------|
| Day/Night Recognition | Supported                             |
| Blacklist/Whitelist   | Supported                             |
| Integration Support   | VMS/GIS/AI integration                |
| Recognition Accuracy  | Enterprise-grade operational accuracy |

#### 16.4.6 Underwater & Boat Surveillance Cameras

| Parameter                  | Minimum Requirement |
|----------------------------|---------------------|
| Water-Resistant Operation  | Mandatory           |
| Low-Light Monitoring       | Supported           |
| Real-Time Streaming        | Supported           |
| ICCC Integration           | Mandatory           |
| Outdoor/Marine Suitability | Required            |

#### 16.4.7 Body-Worn Cameras

| Parameter         | Minimum Requirement |
|-------------------|---------------------|
| Recording         | Full HD             |
| Audio Recording   | Supported           |
| GPS Tagging       | Supported           |
| Docking Support   | Supported           |
| Secure Upload     | Supported           |
| Tamper Resistance | Supported           |

#### 16.4.8 Dash Cameras

| Parameter        | Minimum Requirement  |
|------------------|----------------------|
| Recording        | Full HD              |
| GPS Support      | Supported            |
| Night Recording  | Supported            |
| Storage          | Secure local storage |
| ICCC Integration | Preferred            |

### 16.5 Video Management System (VMS)

| Parameter          | Minimum Requirement              |
|--------------------|----------------------------------|
| Architecture       | Enterprise-grade centralized VMS |
| Camera Scalability | Minimum 4,000 cameras            |
| Multi-OEM Support  | Mandatory                        |
| ONVIF Support      | Mandatory                        |

|                   |           |
|-------------------|-----------|
| Live Monitoring   | Supported |
| Playback          | Supported |
| Edge Recording    | Supported |
| GIS Integration   | Supported |
| AI Integration    | Supported |
| Failover Support  | Supported |
| Role-Based Access | Supported |
| Mobile Access     | Supported |
| Redundancy        | Supported |

#### 16.6 AI Analytics Platform

| Parameter                | Minimum Requirement |
|--------------------------|---------------------|
| Crowd Density Analytics  | Supported           |
| Heatmaps                 | Supported           |
| Reverse Flow Detection   | Supported           |
| Queue Analytics          | Supported           |
| Intrusion Detection      | Supported           |
| Fire/Smoke Detection     | Supported           |
| Predictive Analytics     | Supported           |
| Dashboard                | Supported           |
| GIS Integration          | Supported           |
| Digital Twin Integration | Mandatory           |
| Alert Management         | Supported           |
| API Support              | Supported           |

#### 16.7 Digital Twin Platform

| Parameter                | Minimum Requirement |
|--------------------------|---------------------|
| GIS Visualization        | 2D & 3D             |
| Real-Time Data Ingestion | Supported           |
| Crowd Simulation         | Supported           |
| Traffic Simulation       | Supported           |
| Congestion Forecasting   | Supported           |
| Evacuation Modelling     | Supported           |
| Scenario Planning        | Supported           |
| Dashboard                | Supported           |
| API Integration          | Supported           |

|             |                  |
|-------------|------------------|
| Scalability | Enterprise-grade |
|-------------|------------------|

## 16.8 Communication Network Specifications

### 16.8.1 OFC Infrastructure

| Parameter    | Minimum Requirement     |
|--------------|-------------------------|
| Fiber Type   | Outdoor armoured OFC    |
| Architecture | Ring/Dual Ring          |
| Redundancy   | Mandatory               |
| Protection   | HDPE ducts & protection |
| Testing      | OTDR testing mandatory  |

### 16.8.2 Network Switches

| Parameter        | Minimum Requirement               |
|------------------|-----------------------------------|
| Architecture     | Enterprise-grade managed switches |
| Layer Support    | L2/L3 as required                 |
| Redundancy       | Supported                         |
| QoS              | Supported                         |
| VLAN             | Supported                         |
| SNMP Monitoring  | Supported                         |
| Industrial Grade | For field devices                 |

### 16.8.3 Wireless/RF Infrastructure

| Parameter              | Minimum Requirement |
|------------------------|---------------------|
| Point-to-Point Support | Mandatory           |
| Redundancy Support     | Mandatory           |
| Outdoor Deployment     | Supported           |
| Secure Communication   | Supported           |

### 16.8.4 Enterprise Radio / Wireless Communication System

| Parameter                  | Minimum Requirement |
|----------------------------|---------------------|
| digital VHF/UHF radios     | Mandatory           |
| LTE/PTT radios (optional), | Mandatory           |
| Repeaters, base stations   | Supported           |
| dispatch console           | Supported           |
| recording                  | Supported           |
| emergency SOS              | Supported           |
| battery backup             | Mandatory           |

|                      |           |
|----------------------|-----------|
| ruggedized handhelds | Mandatory |
|----------------------|-----------|

## 16.9 Data Center / Storage / DR Specifications

### 16.9.1 Compute Infrastructure

| Parameter              | Minimum Requirement |
|------------------------|---------------------|
| Virtualization Support | Mandatory           |
| High Availability      | Supported           |
| GPU Support            | For AI workloads    |
| Scalability            | Enterprise-grade    |

### 16.9.2 Storage Infrastructure

| Parameter       | Minimum Requirement |
|-----------------|---------------------|
| Video Retention | Minimum 60 Days     |
| RAID Protection | Mandatory           |
| Scalability     | Supported           |
| Redundancy      | Supported           |
| High Throughput | Supported           |

### 16.9.3 DR Infrastructure

| Parameter          | Minimum Requirement |
|--------------------|---------------------|
| Replication        | Supported           |
| Failover           | Supported           |
| Backup Integration | Supported           |
| Recovery Workflow  | Supported           |

## 16.10 ICCC Specifications

### 16.10.1 Video Wall

| Parameter                  | Minimum Requirement |
|----------------------------|---------------------|
| Enterprise Video Wall      | Mandatory           |
| Multi-Source Visualization | Supported           |
| Redundant Controller       | Supported           |
| Dynamic Layout             | Supported           |

### 16.10.2 Operator Consoles

| Parameter                    | Minimum Requirement |
|------------------------------|---------------------|
| 24x7 Operational Suitability | Mandatory           |
| Ergonomic Design             | Mandatory           |

|                       |           |
|-----------------------|-----------|
| Multi-Monitor Support | Supported |
|-----------------------|-----------|

### 16.10.3 Viewing Centers

| Parameter           | Minimum Requirement |
|---------------------|---------------------|
| Secure Connectivity | Mandatory           |
| Dashboard Access    | Supported           |
| Live Monitoring     | Supported           |

### 16.11 Cybersecurity Specifications

| Parameter          | Minimum Requirement |
|--------------------|---------------------|
| Firewall           | Enterprise-grade    |
| IDS/IPS            | Supported           |
| SIEM Integration   | Supported           |
| MFA                | Supported           |
| Encryption         | Supported           |
| Audit Logging      | Supported           |
| VAPT               | Mandatory           |
| CERT-In Compliance | Mandatory           |

### 16.12 Field Infrastructure Specifications

#### 16.12.1 Poles & Mounting Structures

| Parameter                    | Minimum Requirement |
|------------------------------|---------------------|
| Outdoor Grade                | Mandatory           |
| Corrosion Resistant          | Mandatory           |
| Structural Stability         | Mandatory           |
| Temporary Deployment Support | Supported           |

#### 16.12.2 Outdoor Cabinets

| Parameter          | Minimum Requirement |
|--------------------|---------------------|
| Weather Protection | Mandatory           |
| Cable Management   | Supported           |
| Surge Protection   | Supported           |

#### 16.12.3 UPS Systems

| Parameter            | Minimum Requirement    |
|----------------------|------------------------|
| Online UPS Preferred | Yes                    |
| Backup Support       | As per approved design |



|            |           |
|------------|-----------|
| Monitoring | Supported |
|------------|-----------|

### 16.13 Drone System Specifications

| Parameter           | Minimum Requirement                |
|---------------------|------------------------------------|
| Flight Time         | Minimum operational-grade duration |
| HD/4K Camera        | Supported                          |
| GPS                 | Supported                          |
| Real-Time Streaming | Supported                          |
| ICCC Integration    | Mandatory                          |

### 16.14 GIS & Dashboard Specifications

| Parameter               | Minimum Requirement |
|-------------------------|---------------------|
| GIS Dashboard           | Supported           |
| Real-Time Visualization | Supported           |
| Multi-Layer GIS         | Supported           |
| Reporting               | Supported           |
| Mobile Compatibility    | Supported           |

### 16.15 Public Communication Systems

| Parameter                  | Minimum Requirement |
|----------------------------|---------------------|
| VMD Integration            | Supported           |
| Public Address Integration | Supported           |
| Emergency Alerts           | Supported           |
| Centralized Control        | Supported           |

### 16.16 Environmental & Compliance Standards

All supplied systems shall comply with applicable BIS standards, safety standards, environmental standards, cybersecurity standards, and Government guidelines.

### 16.17 OEM Requirements

All critical systems/components shall:

- be OEM-backed,
- have proven enterprise deployments,
- support long-term support availability,
- and provide warranty/support commitments.

### 16.18 Warranty Requirements

The SI shall provide OEM warranty, software support, firmware updates, and technical support as per contract requirements.

#### **16.19 Future Readiness**

The proposed solution shall support future scalability, future integrations, additional analytics modules, additional devices, and evolving smart city operational requirements without major redesign.

## SECTION 17: DETAILED TECHNICAL SPECIFICATIONS OF MAJOR ITEMS

The detailed technical specifications provided in this section have been prepared based on the current market assessment, prevailing industry standards, operational requirements, and envisaged technological requirements of the Ujjain Simhastha ICCC Project. The specifications primarily cover major and critical system components/items identified at this stage.

For ancillary, supporting, minor, or any other items/components for which detailed specifications are not explicitly provided in the RFP, the Selected Bidder/Implementation Agency (IA) shall propose appropriate, state-of-the-art, interoperable, and industry-standard specifications, duly aligned with the intended functional requirements, system performance, scalability, reliability, cybersecurity, and overall project objectives.

All such proposed specifications, makes/models, architecture, and technical configurations shall be submitted to Ujjain Smart City Limited (USCL) for review and approval prior to procurement, deployment, and implementation. USCL reserves the right to seek modifications, enhancements, or alternative specifications in the interest of overall system performance, standardization, future scalability, operational efficiency, and integration requirements. The decision of USCL in this regard shall be final and binding on the Implementation Agency.

### Specification Precedence

In the event of any discrepancy, ambiguity, inconsistency, conflict, or variation between the brief specifications, indicative descriptions, bill of quantities, scope of work provisions, functional requirements, drawings, schedules, or any other references provided elsewhere in the RFP document and the Detailed Technical Specifications section, the specifications and requirements provided under the Detailed Technical Specifications shall prevail and be considered binding.

However, if any higher specification, functionality, performance parameter, interoperability requirement, statutory compliance, cybersecurity requirement, or operational requirement is mentioned elsewhere in the RFP, the same shall also be deemed applicable and shall be complied with by the Implementation Agency without any additional cost implication to Ujjain Smart City Limited (USCL). The decision of USCL in interpretation of such specifications and applicability shall be final and binding on the bidder/Implementation Agency.

### Generic OEM Eligibility, Security Compliance & Government Procurement Restriction Clause

“Unless specifically exempted or otherwise stated, all OEMs proposed for hardware, software, networking, surveillance, cybersecurity, ICCC, communication, field infrastructure, cloud, data center, and associated ICT components under this project shall comply with the following minimum eligibility, security, and regulatory requirements:

1. OEMs shall be established and reputed manufacturers/developers with proven experience in supply, deployment, integration, commissioning, and support of similar technology solutions in India and/or globally.
2. OEMs shall preferably have direct presence in India through registered office/subsidiary/authorized support structure and shall provide adequate technical support, warranty, firmware/software updates, patches, and after-sales services during the entire contract period.

3. All supplied products/components shall be genuine, new, current-generation, interoperable, industry-standard, and compliant with applicable technical standards, cybersecurity requirements, and interoperability protocols mentioned in the RFP.
4. OEMs/products shall possess relevant quality, security, environmental, telecom, and manufacturing certifications, wherever applicable, such as ISO 9001, ISO 14001, ISO 27001, ISO 45001, CE, RoHS, BIS, STQC, TEC, FCC, UL, ONVIF, IEC standards, and other statutory certifications applicable for the respective product category.
5. All proposed ICT systems, applications, software, firmware, network devices, surveillance systems, servers, storage, cloud infrastructure, and cybersecurity solutions shall comply with applicable guidelines/advisories/frameworks issued by MeitY, CERT-In, National Critical Information Infrastructure Protection Centre (NCIIPC), Ministry of Home Affairs (MHA), and Government of India from time to time.
6. The proposed systems shall support secure architecture and cybersecurity best practices including, but not limited to:
  - Role-based access control (RBAC)
  - Secure authentication and password policies
  - Encryption for data in transit and at rest
  - Secure APIs and interoperability interfaces
  - Logging and audit trail mechanism
  - Patch and vulnerability management
  - Malware/ransomware protection
  - Secure remote access mechanisms
  - Time synchronization and log retention
  - Network segmentation and device hardening
  - Compliance with applicable CERT-In advisories and cybersecurity directions
7. All products/equipment/software shall be free from known malicious code, unauthorized remote access/backdoors, unsupported firmware, prohibited components, and cybersecurity vulnerabilities that may compromise national security, public safety, or ICCC operations.
8. The bidder/Implementation Agency shall submit OEM authorization certificates, technical datasheets, compliance sheets, cybersecurity compliance documents, test certificates, and other supporting documents as sought by Ujjain Smart City Limited (USCL) during technical evaluation or project implementation.
9. USCL reserves the right to seek additional certifications, security audit reports, proof of deployments, interoperability demonstrations, vulnerability assessment reports, source declarations, or replacement of OEM/products in case the proposed solution is found unsuitable from operational, cybersecurity, interoperability, performance, lifecycle support, or national security perspective.

10. Wherever detailed OEM-specific criteria are not separately mentioned for individual items/components, this generic OEM eligibility and compliance clause shall be considered applicable.
11. As per Rule 144 (XI) of General Financial Rules (GFR), 2017, notwithstanding anything contrary contained in these Rules, Department of Expenditure may, by order in writing, impose restrictions, including prior registration and/or screening, on procurement from bidders/OEMs/suppliers/third-party OEMs from a country or countries, or a class of countries, on grounds of defence of India, or matters directly or indirectly related thereto including national security; and no procurement shall be made in violation of such restrictions. The bidder shall ensure compliance with all such orders, guidelines, notifications, and amendments issued by Government of India from time to time.
12. The bidder/Implementation Agency shall ensure that all proposed OEMs, associated OEMs, cloud/service providers, software providers, and supply chain partners comply with prevailing Government of India procurement restrictions, cybersecurity directives, trusted source requirements, and national security related advisories applicable at the time of bidding as well as during the contract period.”

## Index for Ujjain Simhastha ICCC Specifications

| SNo                                                                  | Component                                              |
|----------------------------------------------------------------------|--------------------------------------------------------|
| <b>Group-1: Field Infrastructure &amp; Passive Components</b>        |                                                        |
| 1.                                                                   | Junction Box with Chemical Earthing                    |
| 2.                                                                   | Cat-6 Cable (Armoured) Outdoor                         |
| 3.                                                                   | 12 Core SM Outdoor Armoured Cable (Aerial Application) |
| 4.                                                                   | 24 Core SM Outdoor Armoured Cable                      |
| 5.                                                                   | Fiber LIU for Fiber Termination Point                  |
| 6.                                                                   | Patch Cord, LC-LC Duplex SM                            |
| 7.                                                                   | 19" 1U 24 Port Patch Panel                             |
| 8.                                                                   | Cat 6 UTP RJ45 Keystone Jack                           |
| 9.                                                                   | Cat 6 Patch Cord                                       |
| 10.                                                                  | Cat6 UTP Field Termination Plug                        |
| 11.                                                                  | Poles                                                  |
| 12.                                                                  | 42U Network Rack                                       |
| 13.                                                                  | 22U Network Rack                                       |
| <b>Group-2: Power Infrastructure &amp; Electrical Systems</b>        |                                                        |
| 14.                                                                  | Field UPS                                              |
| 15.                                                                  | Viewing Center UPS                                     |
| 16.                                                                  | DC UPS                                                 |
| 17.                                                                  | DR UPS                                                 |
| 18.                                                                  | DG Set (250 kVA)                                       |
| <b>Group-3: Surveillance &amp; Field Devices</b>                     |                                                        |
| 19.                                                                  | Fixed Camera                                           |
| 20.                                                                  | PTZ Camera                                             |
| 21.                                                                  | ANPR Camera                                            |
| 22.                                                                  | Panoramic Camera                                       |
| 23.                                                                  | Thermal Camera                                         |
| 24.                                                                  | Body Worn Camera Solution                              |
| 25.                                                                  | Dashboard Camera Solution                              |
| 26.                                                                  | Drones                                                 |
| 27.                                                                  | Local Processing Unit (LPU)                            |
| <b>Group-4: Public Safety, Communication &amp; Emergency Systems</b> |                                                        |
| 28.                                                                  | Emergency Call Box (ECB)                               |
| 29.                                                                  | PAS Amplifier                                          |

|                                                                   |                                                     |
|-------------------------------------------------------------------|-----------------------------------------------------|
| 30.                                                               | PAS Horn Speaker                                    |
| 31.                                                               | Digital Handheld Wireless Sets                      |
| 32.                                                               | ECB & PA Control Desk Call Station                  |
| 33.                                                               | IP Phones                                           |
| 34.                                                               | Public Address System (PAS)                         |
| 35.                                                               | Dispatcher Subscription                             |
| <b>Group-5: Network &amp; Communication Infrastructure</b>        |                                                     |
| 36.                                                               | Core Router                                         |
| 37.                                                               | Core Switches                                       |
| 38.                                                               | L3 Managed Distribution Switch                      |
| <b>Group-6: Cyber Security Infrastructure</b>                     |                                                     |
| 39.                                                               | Firewall                                            |
| 40.                                                               | WAF & Server Load Balancer                          |
| 41.                                                               | DDOS Protection                                     |
| 42.                                                               | Network Intrusion Detection System (IDS)            |
| 43.                                                               | Security Information & Event Management (SIEM)      |
| <b>Group-7: ICCC &amp; Control Center Infrastructure</b>          |                                                     |
| 44.                                                               | Integrated Command & Control Center (ICCC) Platform |
| 45.                                                               | Enterprise Management System (EMS)                  |
| 46.                                                               | Videowall                                           |
| 47.                                                               | Workstations                                        |
| 48.                                                               | Keyboard Joystick for PTZ                           |
| 49.                                                               | LED TV 55"                                          |
| <b>Group-8: Data Center, Servers &amp; Storage Infrastructure</b> |                                                     |
| 50.                                                               | Application & Failover Application Server           |
| 51.                                                               | Recording Server                                    |
| 52.                                                               | Analytics Server                                    |
| 53.                                                               | Data Lake Server                                    |
| 54.                                                               | Digital Twin & GIS Server                           |
| 55.                                                               | PA System ECB Server                                |
| 56.                                                               | ITSM Server                                         |
| 57.                                                               | Database Server                                     |
| 58.                                                               | SAN Storage                                         |
| 59.                                                               | NAS Storage                                         |

|                                                                   |                                     |
|-------------------------------------------------------------------|-------------------------------------|
| 60.                                                               | Tape Library                        |
| 61.                                                               | Backup Solution                     |
| <b>Group-9: Video Management, Analytics &amp; AI Applications</b> |                                     |
| 62.                                                               | Video Management System (VMS)       |
| 63.                                                               | Video Summarization                 |
| 64.                                                               | AI Based Video Analytics            |
| 65.                                                               | Facial Recognition System           |
| 66.                                                               | ANPR & Vehicle Detection            |
| <b>Group-10: Smart Mobility, GIS &amp; Digital Platforms</b>      |                                     |
| 67.                                                               | ITMS Application                    |
| 68.                                                               | Geographic Information System (GIS) |
| 69.                                                               | Data Lake & Analytics               |
| 70.                                                               | Digital Twin for Kumbh Area         |
| 71.                                                               | Mobile App for Pilgrims / Visitors  |



### Group 1: Field Infrastructure & Passive Components

| SNo.      | Parameter                           | Specifications                                                                                                                                  | Compliance (Yes/No) |
|-----------|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| <b>1.</b> | <b>Junction Box Ground Mounted</b>  |                                                                                                                                                 |                     |
| 1         | Make                                |                                                                                                                                                 |                     |
| 2         | Model                               | As per approved design & drawings                                                                                                               |                     |
| 3         | Cabinet Material                    | CRCA Sheet, having thickness from 1.2mm to 1.6 mm, Surface Powder Coated with PP Powder.                                                        |                     |
| 4         | Structure                           | Rigid enclosure with base frame suitable for ground mounting on concrete foundation                                                             |                     |
| 5         | Rack Provision                      | 20U rack with minimum load bearing capacity of 40 kg                                                                                            |                     |
| 6         | Protection                          | IP55 certified enclosure with protection against dust and water splashes                                                                        |                     |
| 7         | Locking System                      | Heavy-duty compression lock, tamper-resistant, metal handle/lever                                                                               |                     |
| 8         | Mounting                            | Ground mounted on concrete base with proper anchoring arrangement                                                                               |                     |
| 9         | Mounting facilities                 | Integrated mounting provision for CCTV cameras, junction box for IT components, and meter box. Camera bracket to be adjustable for angle/focus. |                     |
| 10        | Internal Arrangement                | DIN rail / rack mounting, cable management, earthing stud                                                                                       |                     |
| 11        | Cable Entry                         | Bottom/side entry with weatherproof cable glands                                                                                                |                     |
| 12        | Accessories                         | Earthing provision, cooling fan/ventilation, rain canopy (if required)                                                                          |                     |
| 13        | Surface Finish                      | Outdoor grade anti-corrosive powder coating, UV resistant                                                                                       |                     |
| 14        | Logo/Marking                        | Customer logo embossed / sticker on front panel                                                                                                 |                     |
| <b>2.</b> | <b>Cat 6 Outdoor Armoured Cable</b> |                                                                                                                                                 |                     |
| 1         | Category                            | Suitable for 1GBASE-T with Min. 250Mhz of Bandwidth                                                                                             |                     |
| 2         | Cable                               | 4 Twisted Pair alongside PE / PVC Cross Separator                                                                                               |                     |
| 3         | Conductor                           | Conductor: 23AWG Solid Annealed Bare Copper                                                                                                     |                     |
| 4         | Insulation                          | Insulation: High Density Polyethylene, Diameter 1.0 ± 0.05mm                                                                                    |                     |
| 5         | Inner Jacket                        | LSZH                                                                                                                                            |                     |
| 6         | Armour                              | Armor : ECCS Corrugated Tape, >= .125mm                                                                                                         |                     |
| 7         | Outer Jacket                        | UV Resistant & Anti-Rodent HDPE Outer Jacket                                                                                                    |                     |
| 8         | OD                                  | Cable Outer Diameter: 10.0 ± 0.3 mm                                                                                                             |                     |
| 9         | Temp                                | Operating Temperature: -20°C to +70°C                                                                                                           |                     |
| 10        | Bend Radius                         | Bend Radius: 20 X Cable Diameter (Min.) or Better                                                                                               |                     |

| SNo.      | Parameter                                                | Specifications                                                                                                                                                                                                                                                                                         | Compliance (Yes/No) |
|-----------|----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 11        | Electrical                                               | Conductor Resistance : $\leq 9.38 \Omega / 100m$                                                                                                                                                                                                                                                       |                     |
| 12        | Electrical                                               | Resistance Unbalance : 5% Max                                                                                                                                                                                                                                                                          |                     |
| 13        | Electrical                                               | Mutual Capacitance : $\leq 5.6nF/100m$                                                                                                                                                                                                                                                                 |                     |
| 14        | Pulling Force                                            | Should have Pulling force of 50Kg.                                                                                                                                                                                                                                                                     |                     |
| 15        | Standards                                                | IEC 60332-1                                                                                                                                                                                                                                                                                            |                     |
| 16        |                                                          | IEC 60754, IEC 61034                                                                                                                                                                                                                                                                                   |                     |
| 17        | ROHS                                                     | RoHS Complied                                                                                                                                                                                                                                                                                          |                     |
| <b>3.</b> | <b>12 Core SM outdoor Armoured Cable</b>                 |                                                                                                                                                                                                                                                                                                        |                     |
| 1         | Core                                                     | 12F SM OFC (6 Tube x 4 Core F/T)                                                                                                                                                                                                                                                                       |                     |
| 2         | ITU-T Standards                                          | OFC Cables must be as per the ITU-T standard G.652D Fibre -Armoured Optical Fibre Cable.                                                                                                                                                                                                               |                     |
| 3         | Attenuations                                             | 0.23 dB / KM @1550nm for each individual Fibre.<br>AND<br>0.36 dB / KM @1310nm for each individual Fibre.                                                                                                                                                                                              |                     |
| 4         | Bending-loss performance of optical fiber @1310nm&1550nm | $\leq 0.05dB$ (100 turns around a mandrel of 50mm diameter)                                                                                                                                                                                                                                            |                     |
| 5         | Tensile strength:                                        | The cable shall withstand a load of value $\leq 9.81 \times 2.5 \times W$ Newton, where 'W' is the weight of 1Km of the cable and the strain $\leq 0.25\%$ (4000N)                                                                                                                                     |                     |
| 6         | Construction                                             | Fiber cable Single Mode Suitable for Aerial application. Fiber optimized for operation at 1310 nm & at 1550 nm. Fiber type 9/125 / G.652D & Refractive Index 1.4670/1.4675. Cable will be with two Jacket - Inner HDPE Sheath (Thickness $\Rightarrow$ 1.2mm and Outer HDPE sheath $\Rightarrow$ 1.6mm |                     |
| 7         | Construction                                             | Armouring with Aramid Yarn. Steel Tape Armoured in between Inner & Outer sheath with Thickness of 0.15mm. Jacket Material HDPE Black                                                                                                                                                                   |                     |
| 8         | Central Strength Member                                  | FRP Rod ( 2.0 +/- 0.1mm)                                                                                                                                                                                                                                                                               |                     |
| 9         | Fiber count /Tube                                        | 12F - 6Tubes *2 Fiber                                                                                                                                                                                                                                                                                  |                     |
| 10        | Crush load:                                              | The cable shall sustain a compressive load of 4 KN/100x100mm.                                                                                                                                                                                                                                          |                     |
| 11        | Cable Diameter                                           | $\leq 16.0 \pm 3.0$ mm                                                                                                                                                                                                                                                                                 |                     |
| 12        | Cable weight (kg/km)                                     | $200 \pm 50$ kg                                                                                                                                                                                                                                                                                        |                     |
| 13        | Water penetration:                                       | IEC 60794-1-2 F5                                                                                                                                                                                                                                                                                       |                     |
| 14        | Operating Temperature                                    | -20°C~+70°C                                                                                                                                                                                                                                                                                            |                     |
| 15        | Cable bend:                                              | Minimum-bending radius will be 20D, where 'D' is outer dia of the cable.                                                                                                                                                                                                                               |                     |
| 16        | Standards                                                | Standard ISO 11801, IEC 60793-1/60794-1-2 & ITU-T-REC G.652D                                                                                                                                                                                                                                           |                     |

| SNo.      | Parameter                                                | Specifications                                                                                                                                                                                        | Compliance (Yes/No) |
|-----------|----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 17        | PMD & CD                                                 | The manufacturing PMD and CD values should be as per the standards.                                                                                                                                   |                     |
| <b>4.</b> | <b>24 Core SM outdoor Armoured Cable</b>                 |                                                                                                                                                                                                       |                     |
| 1         | Core                                                     | 24F SM OFC (6 Tube x 4 Core F/T)                                                                                                                                                                      |                     |
| 2         | ITU-T Standards                                          | OFC Cables must be as per the ITU-T standard G.652D Fibre -Armoured Optical Fibre Cable.                                                                                                              |                     |
| 3         | Attenuations                                             | 0.23 dB / KM @1550nm for each individual Fibre.<br>AND<br>0.36 dB / KM @1310nm for each individual Fibre.                                                                                             |                     |
| 4         | Bending-loss performance of optical fiber @1310nm&1550nm | ≤0.05dB (100 turns around a mandrel of 50mm diameter)                                                                                                                                                 |                     |
| 5         | Tensile strength:                                        | The cable shall withstand a load of value $\leq 9.81 \times 2.5 \times W$ Newton, where 'W' is the weight of 1Km of the cable and the strain $\leq 0.25\%$ (4000N)                                    |                     |
| 6         | Construction                                             | Cable will be with two Jacket - Inner HDPE Sheath (Thickness => 1.2mm and Outer HDPE sheath => 1.6mm                                                                                                  |                     |
| 7         | Construction                                             | Steel Tape Armoured in between Inner & Outer sheath with Thickness of 0.15mm                                                                                                                          |                     |
| 8         | Central Strength Member                                  | FRP Rod ( 2.0 +/- 0.1mm)                                                                                                                                                                              |                     |
| 9         | Fiber count /Tube                                        | 24F - 6Tubes *4 Fiber                                                                                                                                                                                 |                     |
| 10        | Crush load:                                              | The cable shall sustain a compressive load of 4 KN/100x100mm.                                                                                                                                         |                     |
| 11        | Cable Diameter                                           | $\leq 16.0 \pm 3.0$ mm                                                                                                                                                                                |                     |
| 12        | Cable weight (kg/km)                                     | $200 \pm 50$ kg                                                                                                                                                                                       |                     |
| 13        | Water penetration:                                       | IEC 60794-1-2 F5                                                                                                                                                                                      |                     |
| 14        | Operating Temperature                                    | -20°C~+70°C                                                                                                                                                                                           |                     |
| 15        | Cable bend:                                              | Minimum-bending radius will be 20D, where 'D' is outer dia of the cable.                                                                                                                              |                     |
| 16        | Standards                                                | IEC60794-1<br>IEC11801<br>IEC60332-1-2                                                                                                                                                                |                     |
| 17        | PMD & CD                                                 | The manufacturing PMD and CD values should be as per the standards.                                                                                                                                   |                     |
| <b>5.</b> | <b>Fiber LIU for Fiber termination</b>                   |                                                                                                                                                                                                       |                     |
| 1         | Panel                                                    | Fiber optic patch panel : Fiber optic patch panel should have provision for 48 fiber in 1U size.FMS Termination Drawer should have sufficient slots to accommodate 3 of 12/16 Port LC Adaptor Plates. |                     |

| SNo.      | Parameter                                                             | Specifications                                                                                                                                                     | Compliance (Yes/No) |
|-----------|-----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 2         | Style                                                                 | Should have Slide type drawer structure                                                                                                                            |                     |
| 3         | Height                                                                | Height: 1 U, 1.75 inches (12 and 48 Ports)                                                                                                                         |                     |
| 4         | Materail                                                              | Material: Cold Rolled Steel in surface coated by electrostatic epoxy powder                                                                                        |                     |
| 5         | Slots                                                                 | Slots: FMS should have sufficient slots to accommodate adaptor plates                                                                                              |                     |
| 6         | Slots                                                                 | Empty Slots of FMS should be covered with blank plates.                                                                                                            |                     |
| 7         | Splice Tray                                                           | Splice Tray : Splice Tray of ABS, Comply with UL 94V2 material should be supplied with LIU.                                                                        |                     |
| 8         | Port                                                                  | 24 Duplex LC Port for 48F ( 8Duplex per adapter Plate * 3)                                                                                                         |                     |
| 9         | Adapter                                                               | The adaptor plate should be pre-loaded with LC/SC Type Single mode Duplex Adaptors.                                                                                |                     |
| 10        | Density                                                               | Port Density :12/16 LC/SC Single mode Ports                                                                                                                        |                     |
| 11        | Adapter                                                               | All LC adapters should be duplex type with shutter for protection. Adapters should be snap mount for easy insertion and removal.                                   |                     |
| 12        | Loss                                                                  | Insertion Loss: <0.2 to <0.1 dB                                                                                                                                    |                     |
| 13        | Compliant                                                             | Compliance RoHS Compliant                                                                                                                                          |                     |
| 14        | Testing                                                               | Must be tested for Shall be tested for Corrosion as per ASTM B117: 2019. (Relevant Document to be shared) by NABL Lab                                              |                     |
| <b>6.</b> | <b>Patch Cord, LC LC, Duplex, SM, Bend Insensitive G657, PC, LSZH</b> |                                                                                                                                                                    |                     |
| 1         | Cable                                                                 | Cable : LC-LC 9/125µm OS2 Singlemode Duplex Patch Cord Length : 3mtrs                                                                                              |                     |
| 2         | Connectors                                                            | Connectors : The optical fiber patch leads shall comprise of Single mode 9/125µm fiber with 2XLC type fiber connectors terminated at each end of fiber patch cord. |                     |
| 3         | Insertion                                                             | Insertion loss should be better than 0.30 dB                                                                                                                       |                     |
| 4         | Jacket                                                                | Jacket Material : LSZH complying to IEC 61034-1 & 2, IEC-60332-3C, IEC-60754-2                                                                                     |                     |
| 5         | Attenuation                                                           | Attenuation: 1310/1550 : 0.36/0.22 dB/KM                                                                                                                           |                     |
| 6         | Connector                                                             | Connector Loss : 0.30dB(max)                                                                                                                                       |                     |
| 7         | Temp                                                                  | Operating Temperature : -40°C to +75°C                                                                                                                             |                     |
| 8         | Certificate                                                           | Tested by NBAL / BIS lab for LSZH and OEM Name shall be printed on the Patch Cord Cable.                                                                           |                     |
| <b>9</b>  | Length                                                                | Must be available in 3mtr / 5mtr and 10 mtr or as per BOQ required length                                                                                          |                     |

| SNo.      | Parameter                                    | Specifications                                                                                                                                                                                                                                                                                                                                                                               | Compliance (Yes/No) |
|-----------|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| <b>7.</b> | <b>19" 1U 24 port unshielded Patch Panel</b> |                                                                                                                                                                                                                                                                                                                                                                                              |                     |
| 1         | Panel                                        | Patch panel should be modular design, populates up to 24 UTP keystone-type jacks in 1U                                                                                                                                                                                                                                                                                                       |                     |
| 2         | Tray                                         | Patch panel should be Enhanced with cable strain relief with retention tray; It should be single metal both front panel and rear tray                                                                                                                                                                                                                                                        |                     |
| 3         | Material                                     | Material: sub-rack made of Aluminium with dimension 44.4 mm : 482.6 mm : 105 mm (h:w:d) tray                                                                                                                                                                                                                                                                                                 |                     |
| 4         | IO                                           | Information Outlet or connecting module should comply with the specification mentioned above in 2                                                                                                                                                                                                                                                                                            |                     |
| 5         | Standard                                     | Standard : Conforms to IEC-60603-7 (603-7) for keystone-type, snap-on apertures                                                                                                                                                                                                                                                                                                              |                     |
| 6         | RoHS                                         | Should be RoHS complied                                                                                                                                                                                                                                                                                                                                                                      |                     |
| 7         | UTP and STP                                  | Panel must be able to fit UTP as well as STP jacks. Must have grounding provision / wire with the panel                                                                                                                                                                                                                                                                                      |                     |
| 8         | Testing                                      | Must be tested for Shall be tested for Corrosion as per ASTM B117: 2019. (Relevant Document to be shared) by NABL Lab                                                                                                                                                                                                                                                                        |                     |
| 9         | Certification                                | ETL 4 connector test report needed for 100mtr as well as for short distance i.e 15mtr 4 connector test report by ETL. Must include Zero Bit error Test report.                                                                                                                                                                                                                               |                     |
| 10        | UL                                           | Must be UL Listed                                                                                                                                                                                                                                                                                                                                                                            |                     |
| <b>8.</b> | <b>Cat 6 UTP RJ 45 Keystone Jack</b>         |                                                                                                                                                                                                                                                                                                                                                                                              |                     |
| 1         | Jack                                         | RJ45 Jack of Category 6, for the establishing of transmission channels of class E with up to 4 plugged connections, complies with Category 6 requirements of the standards ISO/IEC 11801:2nd edition, EN 50173-1, DIN EN 50173-1: 2002 as well as ANSI/TIA/EIA 568-B.2-1, de-embedded tested in acc. with IEC 60603-7 (603-7), interoperable and backwards compatible with Cat.5e and Cat.5. |                     |
| 2         | Application                                  | Simple labor -saving termination using standard 110 Block termination and Krone tools                                                                                                                                                                                                                                                                                                        |                     |
| 3         | Compatible                                   | Compatible with RJ standard plugs (RJ11, RJ12, RJ45), PCB- and tool based connection of installation cables AWG 26 – 23 and flexible cables AWG 26/7 – AWG 24/7.                                                                                                                                                                                                                             |                     |

| SNo.      | Parameter                                       | Specifications                                                                                                                                                 | Compliance (Yes/No) |
|-----------|-------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 4         | IDC                                             | IDC termination should feature nil crossover in acc. with EIA/TIA 568-A/B, gold-plated bronze contacts for >750 mating cycles, >200 insertion cycle            |                     |
| 5         | Material                                        | Material: RoHS complied                                                                                                                                        |                     |
| 6         | Hosing                                          | Housing material: Polycarbonate (UL-94-V0)                                                                                                                     |                     |
| 7         | Dust Protection                                 | Should be available with or without dust protection feature                                                                                                    |                     |
| 8         | Certification                                   | ETL 4 connector test report needed for 100mtr as well as for short distance i.e 15mtr 4 connector test report by ETL. Must include Zero Bit error Test report. |                     |
| 9         | UL                                              | Must be UL Listed                                                                                                                                              |                     |
| <b>9.</b> | <b>Patch Cord, U/UTP 4P, Cat.6, length 1/ 2</b> |                                                                                                                                                                |                     |
| 1         | Standard                                        | Standardization: Compliant with Cat.6, Class E requirements: ISO/IEC 11801 2nd Edition Compliant with Cat.6 component standards IEC 60603-7-4 and 60603-7-5    |                     |
| 2         | Type                                            | Cable shield: U/UTP                                                                                                                                            |                     |
| 3         | Conductors                                      | Number of conductors : 8                                                                                                                                       |                     |
| 4         | Guage                                           | Stranding: 7 x 0.19 mm (24 AWG)                                                                                                                                |                     |
| 5         | Jacket                                          | Cable jacket characteristics: cable, metal-free                                                                                                                |                     |
| 6         | OD                                              | Cable overall diameter: 6.0 ±0.3 mm                                                                                                                            |                     |
| 7         | Wire                                            | Tube / Wire type: stranded conductor                                                                                                                           |                     |
| 8         | Insulation                                      | Insulation: solid polyolefin, 0.8 ±0.03 mm diameter                                                                                                            |                     |
| 9         | Plug                                            | Plug: Feature cable retension, with enhanced pull strength.                                                                                                    |                     |
| 10        | Tensile Strength                                | Min. 1.6Kgf/mm <sup>2</sup>                                                                                                                                    |                     |
| 11        | Type                                            | Cat 6 patch cord plug to have round cable holder and strain relief boot to avoid bending.                                                                      |                     |
| 12        | Jacket                                          | Jacket: LSZH with 8 different color options                                                                                                                    |                     |
| 13        | Certificate                                     | Jacket must be tested by NABL/ BIS certified Lab. Report Mandatory                                                                                             |                     |
| 14        | Plug                                            | Plug should have high repeatability cross talk performance                                                                                                     |                     |
| 15        | UL                                              | Must be UL Listed                                                                                                                                              |                     |
| 16        | Testing                                         | Patch Cord must be tested for Anti Bacterial - NABL test report mandatory as per ISO 22196:2011                                                                |                     |
| 17        | Certification                                   | ETL 4 connector test report needed for 100mtr as well as for short distance i.e 15mtr 4 connector test report by ETL. Must include Zero Bit error Test report. |                     |

| SNo.       | Parameter                                | Specifications                                                                                                                                                                                                                             | Compliance (Yes/No) |
|------------|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| <b>10.</b> | <b>Cat6 - UTP Field Termination Plug</b> |                                                                                                                                                                                                                                            |                     |
| 1          | Category                                 | Standardization: Compliant with Cat.6 requirements: ISO/IEC 11801 2nd Edition backward Compliant with Cat.6 component standards IEC 60603-7-4 and 60603-7-5 . Rotatable Plug                                                               |                     |
| 2          | Type                                     | Cable: UTP - Short plug with Rotation plug for better fitment.                                                                                                                                                                             |                     |
| 3          | Conductors                               | Number of conductors : 8                                                                                                                                                                                                                   |                     |
| 4          | IDC                                      | Termination: IDC type Tool less                                                                                                                                                                                                            |                     |
| 5          | Contact Finish                           | Contact Finish: 50μ gold plated on plug contact area                                                                                                                                                                                       |                     |
| 6          | Contact                                  | RJ45 Plug contacts: Phosphor bronze with 100μ nickel plated                                                                                                                                                                                |                     |
| 7          | Wire                                     | Plastic Wire Organizer: PC, Color: White, UL 94V-2                                                                                                                                                                                         |                     |
| 8          | Durability                               | IDC Durability: ≥20 Termination cycles                                                                                                                                                                                                     |                     |
| 9          | Jack Durability                          | RJ45 Jack Durability: ≥750 Plug-Jack mating cycles per IEC 60603-7-81                                                                                                                                                                      |                     |
| 10         | Temperature                              | Operating Temperature: -10 degree C to +60 degree C                                                                                                                                                                                        |                     |
| 11         | Cord retention                           | Patch Cord retention strength: 7.7 Kg Max. according to IEC 60603-7-5                                                                                                                                                                      |                     |
| 12         | Plug Insertion                           | Rj45 Plug Insertion force: 3.1 Kg Max according to IEC 60603-7-81                                                                                                                                                                          |                     |
| 13         | ROHS                                     | RoHS Complied                                                                                                                                                                                                                              |                     |
| <b>11.</b> | <b>Poles</b>                             |                                                                                                                                                                                                                                            |                     |
| 1          | Make                                     |                                                                                                                                                                                                                                            |                     |
| 2          | Model                                    | As per approved design & drawings                                                                                                                                                                                                          |                     |
| 3          | Pole type                                | Tubular pole with foundation bolts after fabrication, hot-dip galvanized.                                                                                                                                                                  |                     |
| 4          | Height                                   | For Surveillance: <b>6</b> meters (clear height) For ANPR: 7 meters (clear height)                                                                                                                                                         |                     |
| 5          | Pole Diameter                            | Diameter should be min 114.3 OD, with Min thkness 4mm                                                                                                                                                                                      |                     |
| 6          | Design                                   | Pole and its accessories shall be designed in such a way that it should withstand a windspeed of 140/kmph. Structural stability certification to be provided by recognized third party consultant (to be Government approved by Purchaser) |                     |
| 7          | Cantilever Arm Length                    | 1.5 meter / 3 meter as per site condition and approved drawing                                                                                                                                                                             |                     |
| 8          | Base Plate & Foundation                  | Base plate minimum size <b>300 mm × 300 mm × 16mm</b> Thk                                                                                                                                                                                  |                     |

| SNo.       | Parameter                  | Specifications                                                                                                                                  | Compliance (Yes/No) |
|------------|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 9          | Galvanising                | Hot Dip Galvanising on poles and cantilever should be as per IS:2629.1985 & IS 4759, Min DFT should be 80Mic.                                   |                     |
| 10         | Mounting facilities        | Integrated mounting provision for CCTV cameras, junction box for IT components, and meter box. Camera bracket to be adjustable for angle/focus. |                     |
| 11         | Cable Routing              | All wiring must be Concealed/hidden, through HDPE/DWC/tubes/pipes. No wires shall be visible from outside.                                      |                     |
| 12         | Foundation                 | Casting of Civil Foundation with foundation bolts, to ensure vibration free erection. Expected foundation depth as per site conditions.         |                     |
| 13         | Protection                 | Lightning arrester shall be provided, to protect all field equipment mounted on pole.                                                           |                     |
| 14         | Earthing                   | Proper earthing provision shall be provided for pole and mounted equipment, Min depth of 1Mtr.                                                  |                     |
| 15         | Testing and certification  | All poles shall be factory load tested and supplied with compliance certificates                                                                |                     |
| 16         | Sign Board & Number plates | A sign board describing words such as "This area under surveillance" and with serial number of the pole.                                        |                     |
| 17         | Standards                  | Fabrication, welding, and coating as per relevant IS standards                                                                                  |                     |
| <b>12.</b> | <b>42U Network Rack</b>    |                                                                                                                                                 |                     |
| 1.         |                            | Rack should be floor Mount 42U RACK (UL Certified or equivalent) (All Racks should be from same OEM)                                            |                     |
|            | Rack Size                  |                                                                                                                                                 |                     |
| 2.         |                            | Floor Mount 42U - 800 W x 1000 D for Network and 600 W x 1200 D or higher for large servers and storages.                                       |                     |
|            | Accessories                |                                                                                                                                                 |                     |
| 3.         |                            | 1U Horizontal Cable Manager                                                                                                                     |                     |
| 4.         |                            | FHU with 4 FAN 360CFM                                                                                                                           |                     |
| 5.         |                            | Vertical Power Distribution Unit with 12 x 5/15 sockets Round Pin, 230 Volts AC, 32 Amp with Plug                                               |                     |
| 6.         |                            | Mounting Hardware Kit (Pack of 20)                                                                                                              |                     |
| 7.         |                            | Vertical Cable Manager-42U-Loop                                                                                                                 |                     |
| 8.         |                            | Casters Set of 4                                                                                                                                |                     |
| 9.         |                            | Adjustable Levellers set of 4                                                                                                                   |                     |
| 10.        |                            | 19" Reduced Channel - Loop Type                                                                                                                 |                     |
| 11.        |                            | Front side - Hexagonal Perforated Single Door-42U                                                                                               |                     |



| SNo.       | Parameter               | Specifications                                                                                 | Compliance (Yes/No) |
|------------|-------------------------|------------------------------------------------------------------------------------------------|---------------------|
| 12.        |                         | Rear side- Hexagonal Perforated Dual Door-42U                                                  |                     |
| 13.        |                         | Side Panels - Vented Side Panels-42U (Set of 2)                                                |                     |
|            | Features                |                                                                                                |                     |
| 14.        |                         | Conforms to Standards                                                                          |                     |
| 15.        |                         | Powder Coated Steel Frame Welded Construction                                                  |                     |
| 16.        |                         | Equipment Mounting on DIN Standard 10sqmm Slots / Direct M6 Tap                                |                     |
| 17.        |                         | Mounting Angle should be 19" Mounting angle made of formed steel                               |                     |
| 18.        |                         | Vented and Cable entry/exit cut outs from Top & Bottom                                         |                     |
| 19.        |                         | Static Load should be 750 kgs or better.                                                       |                     |
| 20.        |                         | Depth adjustable mounting slots                                                                |                     |
| 21.        |                         | Provision to mount the cooling fans on the top panel.                                          |                     |
| <b>13.</b> | <b>22U Network Rack</b> |                                                                                                |                     |
| 1          |                         | Rack should be Floor Mount 22U Rack (UL Certified or equivalent)                               |                     |
|            | Rack Size               |                                                                                                |                     |
| 2          |                         | Floor Mount 22U – 600 W x 800 D / 1000 D suitable for Network, Server and Storage applications |                     |
|            | Accessories             |                                                                                                |                     |
| 3          |                         | 1U Horizontal Cable Manager                                                                    |                     |
| 4          |                         | FHU with 2 / 4 FAN Cooling Unit                                                                |                     |
| 5          |                         | Vertical Power Distribution Unit with minimum 6 / 8 sockets, 230V AC                           |                     |
| 6          |                         | Mounting Hardware Kit (Pack of 20)                                                             |                     |
| 7          |                         | Vertical Cable Manager – 22U                                                                   |                     |
| 8          |                         | Casters Set of 4                                                                               |                     |
| 9          |                         | Adjustable Levellers Set of 4                                                                  |                     |
| 10         |                         | 19" Mounting Channels                                                                          |                     |
| 11         |                         | Front Side – Hexagonal Perforated Lockable Door                                                |                     |
| 12         |                         | Rear Side – Perforated / Dual Split Rear Door                                                  |                     |
| 13         |                         | Side Panels – Removable / Lockable Side Panels                                                 |                     |
|            | Features                |                                                                                                |                     |
| 14         |                         | Conforms to International Standards                                                            |                     |
| 15         |                         | Powder Coated Steel Welded Construction                                                        |                     |
| 16         |                         | Equipment Mounting on DIN Standard Slots / M6 Mounting                                         |                     |
| 17         |                         | Standard 19" Rack Mounting Angle                                                               |                     |
| 18         |                         | Top & Bottom Cable Entry / Exit Provision                                                      |                     |
| 19         |                         | Static Load Capacity minimum 300 kg or higher                                                  |                     |

| SNo. | Parameter | Specifications                               | Compliance<br>(Yes/No) |
|------|-----------|----------------------------------------------|------------------------|
| 20   |           | Depth Adjustable Mounting Slots              |                        |
| 21   |           | Provision to mount Cooling Fans on Top Panel |                        |

## Group 2: Power Infrastructure & Electrical Systems

| SNo.       | Parameter                                                                 | Specifications                                                                                                     | Compliance (Yes/No) |
|------------|---------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|---------------------|
| <b>14.</b> | <b>Field UPS (True Online)</b>                                            |                                                                                                                    |                     |
| 1.         | INPUT                                                                     |                                                                                                                    |                     |
| 2.         | Acceptable Input Voltage                                                  | 100VAC-300VAC                                                                                                      |                     |
| 3.         | Phase                                                                     | Single phase with ground                                                                                           |                     |
| 4.         | Transfer Voltage Range (low load)                                         | 100VAC-300VAC (50% load)                                                                                           |                     |
| 5.         | Transfer Voltage Range (100% load)                                        | 160VAC-300VAC                                                                                                      |                     |
| 6.         | -Line low loss                                                            | 160VAC/100VAC ( $\pm 3\%$ )                                                                                        |                     |
| 7.         | -Line low comeback                                                        | 170VAC/110VAC ( $\pm 3\%$ )                                                                                        |                     |
| 8.         | -Line high loss                                                           | 300VAC ( $\pm 3\%$ )                                                                                               |                     |
| 9.         | -Line high comeback                                                       | 290VAC ( $\pm 3\%$ )                                                                                               |                     |
| 10.        | Nominal input current (r.m.s)<br>@ 230V input and battery fully recharged | 3.95A                                                                                                              |                     |
| 11.        | Inrush Current Limit                                                      | 8*Irms                                                                                                             |                     |
| 12.        | THDi                                                                      | <9% with R full load @ 230V input                                                                                  |                     |
| 13.        | Input Power Factor                                                        | $\geq 0.99$ (R FULL LOAD) @ 230V input                                                                             |                     |
| 14.        | Input Frequency Range                                                     | 45-55Hz / 54-66Hz                                                                                                  |                     |
| 15.        | Input protection                                                          | Breaker                                                                                                            |                     |
| 16.        | OVCD                                                                      | Withstand 440Vac, 24Hours                                                                                          |                     |
| 17.        | Generator Set                                                             | 2.2 x UPS Rating Power                                                                                             |                     |
| 18.        | OUTPUT                                                                    |                                                                                                                    |                     |
| 19.        | Output Power(VA) max                                                      | 1000                                                                                                               |                     |
| 20.        | Output Power(W) max                                                       | 800                                                                                                                |                     |
| 21.        | Output Power Factor                                                       | 0.8                                                                                                                |                     |
| 22.        | Output Waveform                                                           | Pure sine wave                                                                                                     |                     |
| 23.        | Output nominal voltage                                                    | 200VAC/208VAC/220VAC/230VAC/240VAC                                                                                 |                     |
| 24.        | Output Voltage Variation                                                  | $\pm 1\%$                                                                                                          |                     |
| 25.        | Output Transient recovery                                                 | 100ms (IEC 62040-3 Non-linear load)                                                                                |                     |
| 26.        | Output Voltage distortion                                                 | < 3% THD, linear load@Line mode<br>< 3% THD, linear load @ battery mode, battery voltage 12V / per battery         |                     |
| 27.        |                                                                           | < 7% THD, non-linear load@line mode<br>< 7% THD, non-linear load @ battery mode, battery voltage 12V / per battery |                     |
| 28.        | Output Frequency in inverter mode<br>Synchronization range                | 45-55Hz / 54-66Hz                                                                                                  |                     |

| SNo. | Parameter                                                                                         | Specifications                                                                                        | Compliance (Yes/No) |
|------|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|---------------------|
| 29.  | Output Frequency Slew rate                                                                        | 1 Hz/s                                                                                                |                     |
| 30.  | Output Frequency in Battery mode                                                                  | (50/60±0.05) Hz                                                                                       |                     |
| 31.  | Transfer time Inverter Mode to Battery Mode.                                                      | 0ms                                                                                                   |                     |
| 32.  | Transfer Time Inverter Mode to Bypass Mode.                                                       | 4ms                                                                                                   |                     |
| 33.  | Line mode efficiency @ full load with battery fully charged                                       | >88%                                                                                                  |                     |
| 34.  | ECO mode efficiency @ full load with battery fully charged                                        | >97.35%                                                                                               |                     |
| 35.  | Battery mode efficiency @ full load 12Vdc/Battery                                                 | >85%                                                                                                  |                     |
| 36.  | Overload Capability (Line mode)                                                                   | 100%~105% :Constant<br>105%~130% :60s<br>130%~150% :10s<br>>150% :300ms                               |                     |
| 37.  | Overload Capability (Battery mode)                                                                | 100%~105% :Constant<br>105%~130% :10s<br>130%~150% :1s<br>>150% :300ms<br>>105% and Vbat<10.5V: 300ms |                     |
| 38.  | BATTERY                                                                                           |                                                                                                       |                     |
| 39.  | DC Voltage                                                                                        | 36VDC                                                                                                 |                     |
| 40.  | Battery-Low Voltage(full load)                                                                    | 33.6VDC, 11.2V/pcs                                                                                    |                     |
| 41.  | Battery shutdown voltage @ 0 ~ 20% Load (for long run model) / 0~ 30% (for standard model)        | 33VDC, 11V/pcs                                                                                        |                     |
| 42.  | Battery shutdown voltage @ 20 ~ 70% Load (for long run model) / 30%~70% load (for standard model) | 31.5VDC, 10.5/pcs                                                                                     |                     |
| 43.  | Battery shutdown voltage @ > 70% Load                                                             | 30VDC, 10V/pcs                                                                                        |                     |
| 44.  | Charger Current                                                                                   | 10A (2/4/6/8/10A adjustable)                                                                          |                     |
| 45.  | Leakage current                                                                                   | <300uA                                                                                                |                     |

| SNo. | Parameter                      | Specifications          | Compliance (Yes/No) |
|------|--------------------------------|-------------------------|---------------------|
| 46.  | FEATURES                       |                         |                     |
| 47.  | ECO Mode                       | YES                     |                     |
| 48.  | EPO Function                   | NA                      |                     |
| 49.  | Battery Capacity Calculation   | YES                     |                     |
| 50.  | Fan Speed Control              | YES                     |                     |
| 51.  | Frequency Converter Mode(CVCF) | YES, 60% load           |                     |
| 52.  | INTERFACE                      |                         |                     |
| 53.  | RS232                          | Yes                     |                     |
| 54.  | USB                            | NA                      |                     |
| 55.  | COM Slot                       | YES                     |                     |
| 56.  | NMC card                       | Optional                |                     |
| 57.  | AS400 card (Dry contact card)  | Optional                |                     |
| 58.  | Modbus card                    | Optional                |                     |
| 59.  | Input connection               | input powercord 6A      |                     |
| 60.  | Outlet socket                  | 3 x IEC 10A outlets     |                     |
| 61.  | MECHANICAL                     |                         |                     |
| 62.  | WxHxD (mm)                     | 102X228X346             |                     |
| 63.  | Net Weight                     | 3.8Kg                   |                     |
| 64.  | Operating Temperature Range    | 0°C ~ 40 °C             |                     |
| 65.  | Relative Humidity              | 0 ~ 95% (No condensing) |                     |
| 66.  | Audible Noise                  | ≤45dB at front 1m       |                     |
| 67.  | REGULATIONS                    |                         |                     |
| 68.  | -ESD                           | IEC 61000-4-2 Level 3   |                     |
| 69.  | -RS                            | IEC 61000-4-3 Level 3   |                     |
| 70.  | -EFT                           | IEC 61000-4-4 Level 4   |                     |
| 71.  | -Surge                         | IEC 61000-4-5 Level 4   |                     |
| 72.  | -Safety                        | BIS                     |                     |
| 73.  | -Transportation                | ISTA 2A                 |                     |
| 74.  | -Protection                    | IP20 (static)           |                     |
| 75.  | ACCESSORIES                    |                         |                     |
| 76.  | User manual                    | Yes                     |                     |
| 77.  | External battery power cord    | NA                      |                     |
| 78.  | EMC                            |                         |                     |
| 79.  | Conduction                     | NA                      |                     |
| 80.  | Radiation                      | NA                      |                     |

| SNo.       | Parameter                                                | Specifications                                                                  | Compliance (Yes/No) |
|------------|----------------------------------------------------------|---------------------------------------------------------------------------------|---------------------|
| 81.        | Low frequency conducted disturbances                     | Criteria A Ref Std : IEC61000-2-2:2002                                          |                     |
| 82.        | Harmonic current                                         | Class A Ref Std :IEC 61000-3-2:2014                                             |                     |
| 83.        | ESD                                                      | Criteria B, Level 3 Ref Std : IEC 61000-4-2:2008                                |                     |
| 84.        | RS                                                       | Criteria A, Level 3 Ref Std IEC 61000-4-3:2006+AMD1:2007+AMD2:2010 CSV          |                     |
| 85.        | EFT                                                      | Criteria B ,Level 4 Ref Std :IEC 61000-4-4:2012                                 |                     |
| 86.        | Surge                                                    | Criteria B,<br>DM Level 3: 2KV,<br>CM Level 4: 4KV Ref Std : IEC 61000-4-5:2014 |                     |
| 87.        | C/S                                                      | Criteria A, level 3 Ref Std : IEC61000-4-6:2013                                 |                     |
| 88.        | M/S                                                      | Criteria B, level 4 Ref Std : IEC61000-4-8:2009                                 |                     |
| 89.        | Voltage Dips, short interruptions and voltage variations | Criteria B ,Level 4 Ref Std : IEC61000-4-11: 2004                               |                     |
| 90.        | Certificate                                              | BIS                                                                             |                     |
| <b>15.</b> | <b>Viewing Center UPS</b>                                |                                                                                 |                     |
| 1          | Capacity (in kVA)                                        | 3kVA Online UPS, 1-Phase Input / 1-Phase Output                                 |                     |
| 2          | Technology and Capability                                | True Online Double Conversion UPS Technology                                    |                     |
|            |                                                          | DSP / Microprocessor controlled architecture                                    |                     |
|            |                                                          | IGBT based inverter technology                                                  |                     |
|            |                                                          | Pure Sine Wave Output                                                           |                     |
|            |                                                          | ECO Mode for higher efficiency                                                  |                     |
|            |                                                          | Automatic Battery Management                                                    |                     |
|            |                                                          | Intelligent Fan Speed Control                                                   |                     |
|            |                                                          | LCD Display for monitoring and configuration                                    |                     |
|            |                                                          | Cold Start Capability                                                           |                     |
|            |                                                          | Generator Compatible                                                            |                     |
|            |                                                          | Automatic restart after mains recovery                                          |                     |
| 3          | Input                                                    |                                                                                 |                     |
| 3.1        | Input Voltage Range                                      | 110V – 300V AC                                                                  |                     |
| 3.2        | Nominal Input Voltage                                    | 220 / 230 / 240V AC                                                             |                     |
| 3.3        | Input Frequency                                          | 40 – 70 Hz                                                                      |                     |
| 3.4        | Input Power Factor                                       | ≥ 0.99                                                                          |                     |
| 3.5        | Input Current Harmonic Distortion (THDi)                 | ≤ 5%                                                                            |                     |
| 4          | Output                                                   |                                                                                 |                     |
| 4.1        | Output Voltage                                           | 220 / 230 / 240V AC                                                             |                     |
| 4.2        | Output Frequency                                         | 50 / 60 Hz                                                                      |                     |
| 4.3        | Output Voltage Regulation                                | ± 1%                                                                            |                     |
| 4.4        | Output Frequency Regulation                              | ± 0.1 Hz                                                                        |                     |

| SNo.       | Parameter                 | Specifications                                                                                                                                                                     | Compliance (Yes/No) |
|------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 4.5        | Output Waveform           | Pure Sine Wave                                                                                                                                                                     |                     |
| 4.6        | Crest Factor              | 3:01                                                                                                                                                                               |                     |
| 4.7        | Transfer Time             | Zero Transfer Time in Online Mode                                                                                                                                                  |                     |
| 5          | Efficiency                |                                                                                                                                                                                    |                     |
| 5.1        | Online Mode Efficiency    | ≥ 93%                                                                                                                                                                              |                     |
| 5.2        | ECO Mode Efficiency       | ≥ 97%                                                                                                                                                                              |                     |
| 6          | Battery                   |                                                                                                                                                                                    |                     |
| 6.1        | Battery Type              | VRLA / SMF Batteries                                                                                                                                                               |                     |
| 6.2        | Recharge Time             | 90% recharge within 4–6 hours                                                                                                                                                      |                     |
| 6.3        | Battery Protection        | Deep discharge and overload protection                                                                                                                                             |                     |
| 7          | Display & Monitoring      | LCD Display with Input, Output, Battery and Load Status                                                                                                                            |                     |
| 8          | Alarms                    | Audible alarms for Mains Failure, Low Battery, Overload and Fault                                                                                                                  |                     |
| 9          | Protection                | Short Circuit, Overload, Battery Low, Surge Protection                                                                                                                             |                     |
| 10         | Physical                  | Tower Type Floor Mounted UPS                                                                                                                                                       |                     |
| 10.1       | Cooling                   | Forced Air Cooling                                                                                                                                                                 |                     |
| 10.2       | Noise Level               | < 50 dBA                                                                                                                                                                           |                     |
| 11         | Environmental             |                                                                                                                                                                                    |                     |
| 11.1       | Operating Temperature     | 0°C to 40°C                                                                                                                                                                        |                     |
| 11.2       | Humidity                  | 0 – 95% RH Non-Condensing                                                                                                                                                          |                     |
| 12         | Certifications            | IEC 62040-1, IEC 62040-2, IEC 62040-3, CE Compliance                                                                                                                               |                     |
| <b>16.</b> | <b>DC UPS</b>             |                                                                                                                                                                                    |                     |
| 1          | Capacity (in kVA )        | 120kW , 3-Phase Input / 3-Phase Output UPS                                                                                                                                         |                     |
| 2          | Technology and Capability | a) True Online configuration double conversion UPS with 3-Level Inverter Technology                                                                                                |                     |
|            |                           | b) Modular & Scalable UPS with hot swappable Power Module of rating of 20kW.                                                                                                       |                     |
|            |                           | c) Hot Swappable STS Module & control Module                                                                                                                                       |                     |
|            |                           | d) Parallel capability up to Six no. of Power Modules for Vertical redundancy & up to eight UPS units for capacity.                                                                |                     |
|            |                           | e) Redundant System with optional redundant controller, Dual Aux Power Supply.                                                                                                     |                     |
|            |                           | f) Dual CAN Bus within frame & redundant CAN Bus between parallel systems to enable UPS to be removed or inserted UPS in parallel configuration without need of transferring it to |                     |
|            |                           | bypass mode                                                                                                                                                                        |                     |

| SNo.     | Parameter                                | Specifications                                                                                                                                                               | Compliance (Yes/No) |
|----------|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|          |                                          | g) Green mode of operation to improve operational efficiency (>96%) on varying & dynamic loading conditions without compromising the redundancy required in the application. |                     |
|          |                                          | h) Top & Bottom cable Entry options.                                                                                                                                         |                     |
|          |                                          | i) DSP (Digital Signal Processor) / Microprocessor based control, using IGBT devices and high switching frequency PWM                                                        |                     |
|          |                                          | j) Capability of independent or common battery bank operation of the UPS when operated in Parallel Redundant System.                                                         |                     |
|          |                                          | k) Brushless DC Fans with speed control                                                                                                                                      |                     |
|          |                                          | l) Energy Recycle Mode that enables testing of the unit for load testing without external load & helps in Load simulation                                                    |                     |
| <b>3</b> | Model Name & Number                      |                                                                                                                                                                              |                     |
| <b>4</b> | Input                                    |                                                                                                                                                                              |                     |
|          | Input facility -Phases / Wires           | 3-Phase / 4-Wire & Gnd (R, Y, B -Phases & Neutral + Ground)                                                                                                                  |                     |
|          | Nominal Input Voltage                    | 380 / 400 / 415V AC                                                                                                                                                          |                     |
|          | Input Voltage Range                      | 305 - 477 V AC                                                                                                                                                               |                     |
|          | Nominal Input Frequency                  | 50 / 60 Hz (Auto selectable)                                                                                                                                                 |                     |
|          | Input Frequency Range                    | 40-70 Hz                                                                                                                                                                     |                     |
|          | Input Power Factor                       | > 0.99 on Full resistive load Load                                                                                                                                           |                     |
|          | Input Current Harmonic Distortion (THDi) | < 3% on Full Load (with Mains Vthd less than 1%)                                                                                                                             |                     |
| <b>5</b> | Output                                   |                                                                                                                                                                              |                     |
| 5.1      | Nominal Output Voltage                   | 380 / 400 / 415V AC (Selectable)                                                                                                                                             |                     |
| 5.2      | Output Voltage Regulation                | +/- 1%                                                                                                                                                                       |                     |
| 5.3      | Nominal Output Frequency                 | 50 / 60 Hz (Selectable)                                                                                                                                                      |                     |
| 5.4      | Output Frequency Regulation              | +/- 0.05 Hz (Free Running / Self Clocked Mode)                                                                                                                               |                     |
|          |                                          | + / - 5 % (Synchronized to Mains Mode, Selectable)                                                                                                                           |                     |
| 5.5      | Output Frequency Slew Rate               | 1 Hz / s                                                                                                                                                                     |                     |
| 5.6      | Output Wave Form                         | Pure sine wave                                                                                                                                                               |                     |
| 5.7      | Output Voltage Distortion (Vthd)         | <= 1% (For 100% Linear / Resistive Load)                                                                                                                                     |                     |
|          |                                          | <= 5% (For 100% Non-Linear / RCD Load)                                                                                                                                       |                     |
| 5.8      | Crest Factor                             | 3 : 1 On Full Load                                                                                                                                                           |                     |



| SNo.      | Parameter                                                                 | Specifications                                                                                                                                                                        | Compliance (Yes/No) |
|-----------|---------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 5.9       | Unbalanced load on phases                                                 | 100% unbalanced load should be allowed                                                                                                                                                |                     |
| 5.1       | Displacement angle for 100% balanced Load                                 | 120 deg +/- 2 deg                                                                                                                                                                     |                     |
| <b>6</b>  | Transient Response / Recovery                                             |                                                                                                                                                                                       |                     |
| 6.1       | Transient response: Dynamic regulation for 0% to 90 % step load           | +/- 5%                                                                                                                                                                                |                     |
| <b>7</b>  | Transfer Time                                                             |                                                                                                                                                                                       |                     |
| 7.1       | Transfer Time (Mode of operation)                                         | Nil from Mains mode to Battery Mode                                                                                                                                                   |                     |
|           |                                                                           | Nil from Battery Mode to Mains mode                                                                                                                                                   |                     |
| 7.2       | Transfer Time (Inverter to Bypass / Bypass to Inverter)                   | < 1 ms (Synchronized Mode)                                                                                                                                                            |                     |
|           |                                                                           | < 10 ms (Asynchronized Mode)                                                                                                                                                          |                     |
| 7.3       | Automatic & Bi-directional static by-pass (In-built)                      | Uninterrupted transfer of load from Inverter to bypass (under overload / fault conditions) & automatic retransfer from bypass to inverter (on removal of overload / fault conditions) |                     |
| <b>8</b>  | Efficiency (At Nominal Voltage & Resistive Load up to kW rating of UPS)   |                                                                                                                                                                                       |                     |
| 8.1       | Overall Peak Efficiency (AC to AC) - Online (Double Conversion)           | 96%                                                                                                                                                                                   |                     |
| 8.2       | Overall Efficiency (AC to AC) - Online (Double Conversion) on 25% Loading | 95%                                                                                                                                                                                   |                     |
| 8.3       | Eco mode efficiency                                                       | 99%                                                                                                                                                                                   |                     |
| <b>9</b>  | Overload                                                                  |                                                                                                                                                                                       |                     |
| 9.1       | Inverter Overload capacity (Mains Mode & Battery Mode)                    | 125% for 10 minutes                                                                                                                                                                   |                     |
|           |                                                                           | 150% for 60 seconds, > 150% for 1 sec                                                                                                                                                 |                     |
| <b>10</b> | Display Panel (In-built Touch Display)                                    |                                                                                                                                                                                       |                     |
|           | Measurements (On Touch Display)                                           | Input: Voltage /Current/ Frequency                                                                                                                                                    |                     |
|           |                                                                           | Bypass: Voltage /Current/ Frequency                                                                                                                                                   |                     |

| SNo. | Parameter                                                                                   | Specifications                                                                                                                                                                       | Compliance (Yes/No) |
|------|---------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                                                                             | Output: Voltage / frequency / Current                                                                                                                                                |                     |
|      |                                                                                             | Battery: Voltage / Capacity                                                                                                                                                          |                     |
|      |                                                                                             | Load: In kVA / kW / Percentage                                                                                                                                                       |                     |
|      |                                                                                             | Temperature: STS/Inverter/PFC                                                                                                                                                        |                     |
|      | Event Logging & Statistical Data (On LCD): UPS should capture and display upto 10000 events | Events Logs ( 10000 events) like: Over temperature / DC Bus Fail / Fan Fail / Fuse Fail / Overload / Short-circuit / Device Fail / Inverter Fail / Rectifier Fail / Bypass Fail, etc |                     |
|      |                                                                                             | Statistical Data: No. of power failures                                                                                                                                              |                     |
|      |                                                                                             | / Transfers to Bypass / Total Running time, etc                                                                                                                                      |                     |
|      | User Programmable Parameters & Settings (On Touch Display)                                  | Bypass: Voltage / Frequency Range                                                                                                                                                    |                     |
|      |                                                                                             | Inverter: Voltage / Frequency / Eco Mode / Frequency converter                                                                                                                       |                     |
|      |                                                                                             | Battery: Type / Banks / Chargers Current / Manual & Automatic Testing                                                                                                                |                     |
|      |                                                                                             | Mode selection : online Mode, Green Mode, ECO Mode, Energy Recycle                                                                                                                   |                     |
|      |                                                                                             | Mode & Frequency conversion mode                                                                                                                                                     |                     |
|      |                                                                                             | Auto Equalize charge enable/disable option with selectable interval                                                                                                                  |                     |
|      |                                                                                             | Alarms: Buzzer Test / Buzzer Mute                                                                                                                                                    |                     |
|      |                                                                                             | Date & Time Setting                                                                                                                                                                  |                     |
|      |                                                                                             | Password: User / Administrator Setting                                                                                                                                               |                     |
|      |                                                                                             | Information: UPS Serial No. / Firmware                                                                                                                                               |                     |
|      |                                                                                             | Log & Statistical Data Reset & Firmware upgrade                                                                                                                                      |                     |
| 11   | Alarms                                                                                      |                                                                                                                                                                                      |                     |
|      | Audible Alarms                                                                              | Mains Failure / Battery Low Alarm / UPS Overload / Fault / Shortcircuit                                                                                                              |                     |
| 12   | Battery Bank                                                                                | VRLA                                                                                                                                                                                 |                     |
|      | Backup Required                                                                             | 240 minutes on 20 kVA/kW                                                                                                                                                             |                     |
|      | Make, Type, Model No. & Country of Origin                                                   | Vendor to Furnish                                                                                                                                                                    |                     |
| 13   | Physical                                                                                    |                                                                                                                                                                                      |                     |
|      | Operating Temperature                                                                       | 0 to 40 deg C full load                                                                                                                                                              |                     |
|      | Storage Temperature                                                                         | -25 to 70 deg C                                                                                                                                                                      |                     |
|      | Operating Humidity                                                                          | 0 to 95% RH (Non-condensing)                                                                                                                                                         |                     |
|      | Operating Altitude                                                                          | 1000 m (meters above sea level) without derating, Derating 1% for each additional 100m.                                                                                              |                     |
|      | Protection Class                                                                            | IP – 20                                                                                                                                                                              |                     |
|      | Type of Cooling                                                                             | Forced Air                                                                                                                                                                           |                     |

| SNo.       | Parameter                                                       | Specifications                                                                                                                                                                     | Compliance (Yes/No) |
|------------|-----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|            | Noise Level                                                     | < 65 dbA at 1 meter distance                                                                                                                                                       |                     |
|            | Form Factor                                                     | Free Standing Floor Mounted UPS                                                                                                                                                    |                     |
|            | Dimension (w x d x h) in mm                                     | Vendor to Furnish                                                                                                                                                                  |                     |
|            | Weight - in kg                                                  | Vendor to Furnish                                                                                                                                                                  |                     |
|            | Reliability                                                     | MTBF greater than 350000 hours                                                                                                                                                     |                     |
|            | Connections - Rectifier Input / Output / Bypass Input / Battery | Breakers for input,output,bypass & Maintenance bypass                                                                                                                              |                     |
| <b>14</b>  | Certifications                                                  |                                                                                                                                                                                    |                     |
|            | Manufacturer                                                    | QMS: As per ISO 9001: 2008                                                                                                                                                         |                     |
|            |                                                                 | EMS: As per ISO 14001: 2004                                                                                                                                                        |                     |
|            |                                                                 | OSHAS: As per ISO 18001: 2007                                                                                                                                                      |                     |
|            |                                                                 | TL 9000                                                                                                                                                                            |                     |
|            | Product                                                         | Safety: As per IEC62040-1                                                                                                                                                          |                     |
|            |                                                                 | EMC: As per IEC62040-2                                                                                                                                                             |                     |
|            |                                                                 | Performance : As per IEC62040-3                                                                                                                                                    |                     |
|            |                                                                 | ESD: As per IEC61000-4-2 Level 4                                                                                                                                                   |                     |
|            |                                                                 | RF: As per IEC61000-4-3 Level 3                                                                                                                                                    |                     |
|            |                                                                 | FT/Burst: As per IEC61000-4-4 Level 4                                                                                                                                              |                     |
|            |                                                                 | Surge: As per IEC61000-4-5 Level 4                                                                                                                                                 |                     |
|            |                                                                 | CE Declaration of Conformance                                                                                                                                                      |                     |
| <b>17.</b> | <b>DR UPS</b>                                                   |                                                                                                                                                                                    |                     |
| 1          | Capacity (in kVA )                                              | 120kW , 3-Phase Input / 3-Phase Output UPS                                                                                                                                         |                     |
| 2          | Technology and Capability                                       | a) True Online configuration double conversion UPS with 3-Level Inverter Technology                                                                                                |                     |
|            |                                                                 | b) Modular & Scalable UPS with hot swappable Power Module of rating of 20kW.                                                                                                       |                     |
|            |                                                                 | c) Hot Swappable STS Module & control Module                                                                                                                                       |                     |
|            |                                                                 | d) Parallel capability up to Six no. of Power Modules for Vertical redundancy & up to eight UPS units for capacity.                                                                |                     |
|            |                                                                 | e)Redundant System with optional redundant controller, Dual Aux Power Supply.                                                                                                      |                     |
|            |                                                                 | f) Dual CAN Bus within frame & redundant CAN Bus between parallel systems to enable UPS to be removed or inserted UPS in parallel configuration without need of transferring it to |                     |
|            |                                                                 | bypass mode                                                                                                                                                                        |                     |
|            |                                                                 | g) Green mode of operation to improve operational efficiency (>96%) on varying & dynamic loading                                                                                   |                     |

| SNo.     | Parameter                                | Specifications                                                                                                            | Compliance (Yes/No) |
|----------|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|---------------------|
|          |                                          | conditions without compromising the redundancy required in the application.                                               |                     |
|          |                                          | h) Top & Bottom cable Entry options.                                                                                      |                     |
|          |                                          | i) DSP (Digital Signal Processor) / Microprocessor based control, using IGBT devices and high switching frequency PWM     |                     |
|          |                                          | j) Capability of independent or common battery bank operation of the UPS when operated in Parallel Redundant System.      |                     |
|          |                                          | k) Brushless DC Fans with speed control                                                                                   |                     |
|          |                                          | l) Energy Recycle Mode that enables testing of the unit for load testing without external load & helps in Load simulation |                     |
| <b>3</b> | Model Name & Number                      |                                                                                                                           |                     |
| <b>4</b> | Input                                    |                                                                                                                           |                     |
|          | Input facility -Phases / Wires           | 3-Phase / 4-Wire & Gnd (R, Y, B -Phases & Neutral + Ground)                                                               |                     |
|          | Nominal Input Voltage                    | 380 / 400 / 415V AC                                                                                                       |                     |
|          | Input Voltage Range                      | 305 - 477 V AC                                                                                                            |                     |
|          | Nominal Input Frequency                  | 50 / 60 Hz (Auto selectable)                                                                                              |                     |
|          | Input Frequency Range                    | 40-70 Hz                                                                                                                  |                     |
|          | Input Power Factor                       | > 0.99 on Full resistive load Load                                                                                        |                     |
|          | Input Current Harmonic Distortion (THDi) | < 3% on Full Load (with Mains Vthd less than 1%)                                                                          |                     |
| <b>5</b> | Output                                   |                                                                                                                           |                     |
| 5.1      | Nominal Output Voltage                   | 380 / 400 / 415V AC (Selectable)                                                                                          |                     |
| 5.2      | Output Voltage Regulation                | +/- 1%                                                                                                                    |                     |
| 5.3      | Nominal Output Frequency                 | 50 / 60 Hz (Selectable)                                                                                                   |                     |
| 5.4      | Output Frequency Regulation              | +/- 0.05 Hz (Free Running / Self Clocked Mode)                                                                            |                     |
|          |                                          | + / - 5 % (Synchronized to Mains Mode, Selectable)                                                                        |                     |
| 5.5      | Output Frequency Slew Rate               | 1 Hz / s                                                                                                                  |                     |
| 5.6      | Output Wave Form                         | Pure sine wave                                                                                                            |                     |
| 5.7      | Output Voltage Distortion (Vthd)         | <= 1% (For 100% Linear / Resistive Load)                                                                                  |                     |
|          |                                          | <= 5% (For 100% Non-Linear / RCD Load)                                                                                    |                     |
| 5.8      | Crest Factor                             | 3 : 1 On Full Load                                                                                                        |                     |
| 5.9      | Unbalanced load on phases                | 100% unbalanced load should be allowed                                                                                    |                     |

| SNo. | Parameter                                                                 | Specifications                                                                                                                                                                        | Compliance (Yes/No) |
|------|---------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 5.1  | Displacement angle for 100% balanced Load                                 | 120 deg +/- 2 deg                                                                                                                                                                     |                     |
| 6    | Transient Response / Recovery                                             |                                                                                                                                                                                       |                     |
| 6.1  | Transient response: Dynamic regulation for 0% to 90 % step load           | +/- 5%                                                                                                                                                                                |                     |
| 7    | Transfer Time                                                             |                                                                                                                                                                                       |                     |
| 7.1  | Transfer Time (Mode of operation)                                         | Nil from Mains mode to Battery Mode                                                                                                                                                   |                     |
|      |                                                                           | Nil from Battery Mode to Mains mode                                                                                                                                                   |                     |
| 7.2  | Transfer Time (Inverter to Bypass / Bypass to Inverter)                   | < 1 ms (Synchronized Mode)                                                                                                                                                            |                     |
|      |                                                                           | < 10 ms (Asynchronized Mode)                                                                                                                                                          |                     |
| 7.3  | Automatic & Bi-directional static by-pass (In-built)                      | Uninterrupted transfer of load from Inverter to bypass (under overload / fault conditions) & automatic retransfer from bypass to inverter (on removal of overload / fault conditions) |                     |
| 8    | Efficiency (At Nominal Voltage & Resistive Load up to kW rating of UPS)   |                                                                                                                                                                                       |                     |
| 8.1  | Overall Peak Efficiency (AC to AC) - Online (Double Conversion)           | 96%                                                                                                                                                                                   |                     |
| 8.2  | Overall Efficiency (AC to AC) - Online (Double Conversion) on 25% Loading | 95%                                                                                                                                                                                   |                     |
| 8.3  | Eco mode efficiency                                                       | 99%                                                                                                                                                                                   |                     |
| 9    | Overload                                                                  |                                                                                                                                                                                       |                     |
| 9.1  | Inverter Overload capacity (Mains Mode & Battery Mode)                    | 125% for 10 minutes                                                                                                                                                                   |                     |
|      |                                                                           | 150% for 60 seconds, > 150% for 1 sec                                                                                                                                                 |                     |
| 10   | Display Panel (In-build Touch Display)                                    |                                                                                                                                                                                       |                     |
|      | Measurements (On Touch Display)                                           | Input: Voltage /Current/ Frequency                                                                                                                                                    |                     |
|      |                                                                           | Bypass: Voltage /Current/ Frequency                                                                                                                                                   |                     |
|      |                                                                           | Output: Voltage / frequency / Current                                                                                                                                                 |                     |
|      |                                                                           | Battery: Voltage / Capacity                                                                                                                                                           |                     |

| SNo. | Parameter                                                                                   | Specifications                                                                                                                                                                       | Compliance (Yes/No) |
|------|---------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                                                                             | Load: In kVA / kW / Percentage                                                                                                                                                       |                     |
|      |                                                                                             | Temperature: STS/Inverter/PFC                                                                                                                                                        |                     |
|      | Event Logging & Statistical Data (On LCD): UPS should capture and display upto 10000 events | Events Logs ( 10000 events) like: Over temperature / DC Bus Fail / Fan Fail / Fuse Fail / Overload / Short-circuit / Device Fail / Inverter Fail / Rectifier Fail / Bypass Fail, etc |                     |
|      |                                                                                             | Statistical Data: No. of power failures                                                                                                                                              |                     |
|      |                                                                                             | / Transfers to Bypass / Total Running time, etc                                                                                                                                      |                     |
|      | User Programmable Parameters & Settings (On Touch Display)                                  | Bypass: Voltage / Frequency Range                                                                                                                                                    |                     |
|      |                                                                                             | Inverter: Voltage / Frequency / Eco Mode / Frequency converter                                                                                                                       |                     |
|      |                                                                                             | Battery: Type / Banks / Chargers Current / Manual & Automatic Testing                                                                                                                |                     |
|      |                                                                                             | Mode selection : online Mode, Green Mode, ECO Mode, Energy Recycle                                                                                                                   |                     |
|      |                                                                                             | Mode & Frequency conversion mode                                                                                                                                                     |                     |
|      |                                                                                             | Auto Equalize charge enable/disable option with selectable interval                                                                                                                  |                     |
|      |                                                                                             | Alarms: Buzzer Test / Buzzer Mute                                                                                                                                                    |                     |
|      |                                                                                             | Date & Time Setting                                                                                                                                                                  |                     |
|      |                                                                                             | Password: User / Administrator Setting                                                                                                                                               |                     |
|      |                                                                                             | Information: UPS Serial No. / Firmware                                                                                                                                               |                     |
|      |                                                                                             | Log & Statistical Data Reset & Firmware upgrade                                                                                                                                      |                     |
| 11   | Alarms                                                                                      |                                                                                                                                                                                      |                     |
|      | Audible Alarms                                                                              | Mains Failure / Battery Low Alarm / UPS Overload / Fault / Shortcircuit                                                                                                              |                     |
| 12   | Battery Bank                                                                                | VRLA                                                                                                                                                                                 |                     |
|      | Backup Required                                                                             | 240 minutes on 20 kVA/kW                                                                                                                                                             |                     |
|      | Make, Type, Model No. & Country of Origin                                                   | Vendor to Furnish                                                                                                                                                                    |                     |
| 13   | Physical                                                                                    |                                                                                                                                                                                      |                     |
|      | Operating Temperature                                                                       | 0 to 40 deg C full load                                                                                                                                                              |                     |
|      | Storage Temperature                                                                         | -25 to 70 deg C                                                                                                                                                                      |                     |
|      | Operating Humidity                                                                          | 0 to 95% RH (Non-condensing)                                                                                                                                                         |                     |
|      | Operating Altitude                                                                          | 1000 m (meters above sea level) without derating, Derating 1% for each additional 100m.                                                                                              |                     |
|      | Protection Class                                                                            | IP – 20                                                                                                                                                                              |                     |
|      | Type of Cooling                                                                             | Forced Air                                                                                                                                                                           |                     |
|      | Noise Level                                                                                 | < 65 dbA at 1 meter distance                                                                                                                                                         |                     |
|      | Form Factor                                                                                 | Free Standing Floor Mounted UPS                                                                                                                                                      |                     |

| SNo. | Parameter                                                       | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Compliance (Yes/No) |
|------|-----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      | Dimension (w x d x h) in mm                                     | Vendor to Furnish                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                     |
|      | Weight - in kg                                                  | Vendor to Furnish                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                     |
|      | Reliability                                                     | MTBF greater than 350000 hours                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |
|      | Connections - Rectifier Input / Output / Bypass Input / Battery | Breakers for input,output,bypass & Maintenance bypass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
| 14   | Certifications                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |
|      | Manufacturer                                                    | QMS: As per ISO 9001: 2008                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                     |
|      |                                                                 | EMS: As per ISO 14001: 2004                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                     |
|      |                                                                 | OSHAS: As per ISO 18001: 2007                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                     |
|      |                                                                 | TL 9000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                     |
|      | Product                                                         | Safety: As per IEC62040-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
|      |                                                                 | EMC: As per IEC62040-2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                     |
|      |                                                                 | Performance: As per IEC62040-3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |
|      |                                                                 | ESD: As per IEC61000-4-2 Level 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
|      |                                                                 | RF: As per IEC61000-4-3 Level 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |
|      |                                                                 | FT/Burst: As per IEC61000-4-4 Level 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
|      |                                                                 | Surge: As per IEC61000-4-5 Level 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                     |
|      |                                                                 | CE Declaration of Conformance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                     |
| 18.  | DG Set (250 kVA)                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| 1    | Diesel Engine                                                   | Six Cylinders Inline, Liquid Cooled, Turbocharged with After Cooled, Developing 310 hp @ 1500 RPM. Engine is with Electric Start, Compression Ignition, 4 Stroke Cycle, designed to run continuously at 1500 RPM. Confirming to IS 10002, ISO-3046, BS 5514 standards. Radiator with Fan, Fuel Injection equipment with Electronic Governor, Dry type Air Cleaner, Exhaust Silencer, Lube Oil filter (Spin On Type), Fuel Oil filter (Spin On Type), 2X12V Electric starting system, Battery charging alternator, Stop Solenoid, Lube Oil pressure Gauge, Water Temperature Gauge, Lube Oil temperature Gauge, Battery Voltage, K - Cool Super Plus coolant, First Fill Lube Oil. |                     |
| 2    | Alternator                                                      | Suitable for continuous duty operations rated at 1500 RPM 415 V, 0.8 PF, 50Hz, 3Ph. in SPDP Enclosure, Self- Excited & Self- regulated, Brush less, 'H' class Insulation, Floor mounted with anti-friction Shielded Ball Bearing on end. The alternator conforms to IS: 4722, BS EN 60034-1 suitable for tropical conditions.                                                                                                                                                                                                                                                                                                                                                     |                     |

| SNo. | Parameter                                 | Specifications                                                                                                                                                                                                                                                                            | Compliance (Yes/No) |
|------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 3    | Base Frame                                | Suitable to couple above Engine & Alternator made from steel sheet metal                                                                                                                                                                                                                  |                     |
| 4    | Fuel Tank                                 | 8 Hrs Capacity for continuous running, with Diesel fuel Inlet & Outlet, Air Vent & Drain plug arrangements                                                                                                                                                                                |                     |
| 5    | Battery                                   | 2 Nos.12 V Battery with Leads                                                                                                                                                                                                                                                             |                     |
| 6    | Genset Controller Unit with Control Panel | Genset Controller unit with totally enclosed, Steel Construction Control Panel suitable for indoor floor / wall mounting installation having safeties and display parameters.                                                                                                             |                     |
| 7    | Gen-set Display Parameters                | Phase Voltage, Line current, Frequency, Average Voltage, Average Current, Phase kW & Total kW, kWH, kVA, kVAR, PF.                                                                                                                                                                        |                     |
| 8    | Engine Display Parameters                 | Lube Oil Pressure, Engine Temperature, Fuel Level Status, Engine speed, Battery Voltage, Minimum Battery Voltage, Lube Oil Temperature, Engine Hours, No. of Starts.                                                                                                                      |                     |
| 9    | Electrical Safeties (along with Display)  | Genset Under/Over voltage, Under/Over Battery voltage, Under/Over Frequency, Phase Failure, Phase sequence reverse, Over Current, Over kW.                                                                                                                                                |                     |
| 10   | Mechanical Safeties (along with Display)  | Phase Voltage, Low Lube oil pressure, High Lube oil Temperature, High engine coolant temperature, Low coolant level, Low Fuel Level, Start/Stop fail, Battery Charging Alternator fail.                                                                                                   |                     |
| 11   | Acoustic Enclosure                        | Enclosure should be modular in construction, Base Frame should be made of Sheet metal, Durable industrial locking system must be provided on Doors, Door Gaskets are made in high quality EPDM material.                                                                                  |                     |
| 12   | Corrosion Resistance                      | All sheet metal parts/components are hot dipped in seven tanks process, Pretreated and Passivated, Sheet metal components are with Pretreated and Passivated Base Powder Coated, Base Frame must be Epoxy Coated/Powder Coated, Zinc Passivated Hardware should be used to avoid rusting. |                     |
| 13   | Acoustic Insulation                       | Sound proofing of the Enclosure must do with Quality Foam confirming to IS: 7888 Standard, Acoustic foam shall be fire retardant and fire resistant, Attenuates shall be provided to control sound at entry and exit of container, specially designed Residential Silencer is provided.   |                     |



| SNo. | Parameter                     | Specifications                                                                                                                                | Compliance (Yes/No) |
|------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 14   | Ventilation & Air Circulation | Exhaust pipe inside Enclosure is thoroughly insulated by Cladding of Rock wool and Sheet.                                                     |                     |
| 15   | Electrical                    | Neutral Body Earthing points at the sides of enclosure are isolated through Moulded compound.                                                 |                     |
| 16   | Safeties                      | Emergency Push button to Stop the DG set from outside, Low Fuel oil level, Low Lube oil pressure, Low Coolant Level, High Engine Temperature. |                     |

### Group 3: Surveillance & Field Devices

| SNo.       | Parameter                  | Specifications                                                                                             | Compliance (Yes/No) |
|------------|----------------------------|------------------------------------------------------------------------------------------------------------|---------------------|
| <b>19.</b> | <b>Fixed Camera (5 MP)</b> |                                                                                                            |                     |
| 1          | Image Sensor:              | 5 MP outdoor, 1/2.8"CMOS with IP67 rating                                                                  |                     |
| 2          | Max Resolution:            | 1920 x 1080                                                                                                |                     |
| 3          | Focal Length:              | Motorized Lens 05-55mm                                                                                     |                     |
| 4          | Zoom/Focus Adjust:         | Motorized zoom and focus -Auto back focus                                                                  |                     |
| 5          | Iris:                      | P-iris                                                                                                     |                     |
| 6          | IR Distance:               | 163 ft/50m                                                                                                 |                     |
| 7          | Minimum Illumination:      | Colour 0.01 Lux, B/W 0 Lux                                                                                 |                     |
| 8          | Shutter Speed:             | Auto 1/3~1/100000 or more, manual                                                                          |                     |
| 9          | Day/Night Performance:     | True day/night (IR cut filter)                                                                             |                     |
| 10         | Wide Dynamic Range         | True WDR; 120 dB                                                                                           |                     |
| 11         | WDR Feature                | OFF, Auto, Low, Medium and High                                                                            |                     |
| 12         | Gain control               | Auto/Manual                                                                                                |                     |
| 13         | Backlight compensation     | Yes                                                                                                        |                     |
| 14         | White balance mode         | Auto/Manual                                                                                                |                     |
| 15         | Privacy masking            | 5 areas or more                                                                                            |                     |
| 16         | Motion Detection           | 4 areas or more                                                                                            |                     |
| 17         | Video Analysis             | Motion/ Tampering/ Intrusion/ Line Cross                                                                   |                     |
| 18         | Network Loss Detection     | Yes                                                                                                        |                     |
| 19         | Image Settings:            | Brightness, Contrast, Saturation, Sharpness, Mirror, Flip, Corridor, Hue, Rotation, Anti-flicker, BLC, AWB |                     |
| 20         | Video compression          | H.265, H.264 compression, M-JPEG,                                                                          |                     |
| 21         | Video streaming            | Quad streaming or better                                                                                   |                     |
| 22         | Video resolution           | 1080p, 720p, 720x567, 720x480, 640x480, 640x360, 320x240                                                   |                     |
| 23         | Streaming:                 | Unicast and Multicast streams. Quad streaming.                                                             |                     |

| SNo. | Parameter             | Specifications                                                                                            | Compliance (Yes/No) |
|------|-----------------------|-----------------------------------------------------------------------------------------------------------|---------------------|
|      |                       | Stream 1 & 2 Should be 1920x1080 @25/30 fps                                                               |                     |
| 24   | Frame rate            | 1080p @ 30 fps                                                                                            |                     |
| 25   | Bit rate              | 128K~8000K                                                                                                |                     |
| 26   | Rate Control          | CBR / CVBR                                                                                                |                     |
| 27   | GOP                   | 1~100 or more                                                                                             |                     |
| 28   | Dynamic GOP           | ON/OFF                                                                                                    |                     |
| 29   | Max Dynamic GOP       | 1~254 or more                                                                                             |                     |
| 30   | Audio Compression     | G.711 8KHz/16-bit                                                                                         |                     |
| 31   | Encoding              | A-Law and U-Law                                                                                           |                     |
| 32   | Audio In Volume       | High, Mid and Low. Should be able to available in camera web page                                         |                     |
| 33   | Audio Out Volume      | High, Mid and Low. Should be able to available in camera web page                                         |                     |
| 34   | AE Mode               | Auto, 50Hz, 60Hz and Lock                                                                                 |                     |
| 35   | Iris                  | P-iris or better                                                                                          |                     |
| 36   | ROI                   | 5 zone or more                                                                                            |                     |
| 37   | OSD                   | Date/Time and Name                                                                                        |                     |
| 38   | Audio Streaming       | Two-way                                                                                                   |                     |
| 39   | Audio Input           | Line-in                                                                                                   |                     |
| 40   | Audio Output          | Line-out                                                                                                  |                     |
| 41   | Connectors            | Should have a compulsory Reset button audio -In & Out Port, RJ 45 Port                                    |                     |
| 42   | Interface             | 10/100 Mbps Ethernet, RJ-45                                                                               |                     |
| 43   | Network port security | 802.1x                                                                                                    |                     |
| 44   | Supported protocols   | IPv4, IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, RTSP, RTP, SMTP, NTP, DHCP, FTP, Zero Configure, Bonjour |                     |
| 45   | ONVIF                 | Profile S, G, T & M                                                                                       |                     |
| 46   | Approvals:            | CE, FCC, STQC, BIS ER:01 2024, IP67, IK10, NEMA4X, RoHS, NDAA Compliant                                   |                     |
| 47   | Users                 | Live viewing/Administrator for up to 10 clients                                                           |                     |
| 48   | Browsers              | Google Chrome, Mozilla Firefox, Microsoft Edge                                                            |                     |
| 49   | Event trigger         | Motion detection, Tampering detection, Alarm in                                                           |                     |
| 50   | Notifications         | Send message via e-mail/record to FTP/NAS/SD card, record JPG/mp4                                         |                     |
| 51   | Power supply          | PoE IEEE 802.3af, Class 3/DV 12V                                                                          |                     |
| 52   | Storage               | Micro SD (512 GB)                                                                                         |                     |

| SNo.       | Parameter                | Specifications                                                                                                                                                                                                                             | Compliance (Yes/No) |
|------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 53         | Alarms:                  | 1 alarm input/1 alarm output                                                                                                                                                                                                               |                     |
| 54         | Operating Temp           | 50° to 140° F (-20° to 55° D54 E54C)                                                                                                                                                                                                       |                     |
| 55         | Humidity                 | 10% ~ 90%RH (no condensation)                                                                                                                                                                                                              |                     |
| 56         |                          | Camera, VMS & NVR should be of same make/OEM                                                                                                                                                                                               |                     |
| <b>20.</b> | <b>PTZ Camera</b>        |                                                                                                                                                                                                                                            |                     |
| 1          | Image Sensor:            | 1/2.8" 5MP Sony CMOS progressive sensor or better                                                                                                                                                                                          |                     |
| 2          | Max Resolution:          | 2592 x 1944                                                                                                                                                                                                                                |                     |
| 3          | Focal Length:            | Motorized Lens 4.25 - 170 mm (40X optical zoom) or better                                                                                                                                                                                  |                     |
| 4          | Zoom/Focus Adjust:       | Motorized zoom and Auto Focus (Auto & manual)                                                                                                                                                                                              |                     |
| 5          | IR Distance:             | 250 m or better                                                                                                                                                                                                                            |                     |
| 6          | Minimum Illumination:    | Colour: 0.05 lux; B/W: 0.01 lux (IR OFF; 0 lux IR ON)                                                                                                                                                                                      |                     |
| 7          | Iris:                    | P-iris                                                                                                                                                                                                                                     |                     |
| 8          | Shutter Speed:           | Auto 1/3~1/10000 or more, manual                                                                                                                                                                                                           |                     |
| 9          | Day & Night Performance: | Automatically removable IR-cut filter                                                                                                                                                                                                      |                     |
| 10         | HDR                      | Required                                                                                                                                                                                                                                   |                     |
| 11         | Defog                    | Required                                                                                                                                                                                                                                   |                     |
| 12         | Image Settings:          | Brightness, Sharpness, Contrast, Saturation, Hue, White Balance, Exposure Control, 3DNR, 2DNR, Colour Noise reduction, Text Overlay, ROI (areas each for stream 1 and 2); Privacy Mask (5 areas); Motion Detection (4 areas);              |                     |
| 13         | Video compression        | H.265 or better                                                                                                                                                                                                                            |                     |
| 14         | Video streaming          | Quad streaming or better                                                                                                                                                                                                                   |                     |
| 15         | Video resolution         | 2592 × 1944, 2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 1024, 1280 × 720, 1024 × 768, 800 × 600, 720 × 480, 640 × 480, 352 × 240, 320 × 240                                                                                             |                     |
| 16         | Streaming                | Unicast and Multicast streams. Quad streaming.<br>Stream 01: 2592 x 1944 @30fps<br>Stream 02: 1920 x 1080 @30fps<br>Stream 03: 1920 x 1080 @30fps<br>Stream 04: 320 x 240 @30fps<br>At least Three streams should be at @60 fps with 1080p |                     |
| 17         | Frame rate               | 5MP at 25/30 fps and 2MP @50/60 fps                                                                                                                                                                                                        |                     |
| 18         | Rate Control             | LBR/CBR/CVBR                                                                                                                                                                                                                               |                     |
| 19         | Pan Range:               | 360° continuous pan                                                                                                                                                                                                                        |                     |
| 20         | Pan Speed:               | 0.1° - 300°/second                                                                                                                                                                                                                         |                     |

| SNo. | Parameter           | Specifications                                                                                                                                                                                                                                                                                                                                                                    | Compliance (Yes/No) |
|------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 21   | Tilt Range:         | -20° - 90°                                                                                                                                                                                                                                                                                                                                                                        |                     |
| 22   | Tilt Speed:         | 0.1° - 300°/second                                                                                                                                                                                                                                                                                                                                                                |                     |
| 23   | Presets:            | 256; 8 Sequence, 8 cruise, 4 auto pan                                                                                                                                                                                                                                                                                                                                             |                     |
| 24   | Audio Compression   | G.711/ G.726/ AAC/ LPCM                                                                                                                                                                                                                                                                                                                                                           |                     |
| 25   | Audio Streaming     | 2 Way                                                                                                                                                                                                                                                                                                                                                                             |                     |
| 26   | Sytem               | PAL/NTSC                                                                                                                                                                                                                                                                                                                                                                          |                     |
| 27   | OSD                 | Date & Time, Text Contents, Image (Transparency 0-255)                                                                                                                                                                                                                                                                                                                            |                     |
| 28   | Connectors & button | 24 VAC Power: terminal block. Network/PoE: RJ-45. Audio In/Out and Alarm In/Out: terminal block. SDHC/SDXC Card Slot. Reset button. Indicator: network status LED.                                                                                                                                                                                                                |                     |
| 29   | Interface           | 1Gbp Ethernet(Auto, Half Duplex, Full Duplex), RJ-45 or better                                                                                                                                                                                                                                                                                                                    |                     |
| 30   | Security            | IP address filtering, HTTP/HTTPS Sever Certificate Validation, SSL, multi-user authority, SMTP Server Certification Validation, SFTP Server Host Key Fingerprint, Password Security, CA Certificate, User Authentication/ HTTPS/ IP Filter/ IEEE 802.1x, TLS 1.3, SHA-256, DES, AES-256, User Access Log, TPM 2.0, FIPS 140 Level 2 or better                                     |                     |
| 31   | Supported protocols | IPv4/v6, QoS, TCP, UDP, DHCP, UPnP, SNMP V3, LLDP, RTMP, RTP, RTSP(All four stream), HTTP, VLAN, HTTPS, RTSPS, FTP, NTP, ONVIF: S, G, T, M                                                                                                                                                                                                                                        |                     |
| 32   | Event Triggers      | External Input, Analytics, Network Failure Detection, Periodical Event, Manual Trigger                                                                                                                                                                                                                                                                                            |                     |
| 33   | Event Actions       | External output Activation<br>Video and audio recording to edge storage<br>File Upload : FTP, network share and email<br>Notification : HTTP, FTP, email                                                                                                                                                                                                                          |                     |
| 34   | Browsers            | Google Chrome, Mozilla Firefox, Microsoft Edge                                                                                                                                                                                                                                                                                                                                    |                     |
| 35   | Analytics           | Motion Detection, Tampering, Audio detection, Line Crossing, Object in zone, Object Counting (line cross, number of objects in Zone), Loitering, Parking Violation, Wrong Way, People gathering, Abandoned Object, Removed Object, Face Recognition, LPR Recognition, Auto Face Enrollment, Vehicle Recognition & Classification, Heat Map, PPE Detection, Auto Tracking, Tagging |                     |
| 36   | LiDER               | Required                                                                                                                                                                                                                                                                                                                                                                          |                     |

| SNo.       | Parameter                 | Specifications                                                                                                                                                                                                                                                                                                               | Compliance (Yes/No) |
|------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 37         | Power supply              | IEEE802.3bt, Type 3, class 6, max 56.00 watt AC24V                                                                                                                                                                                                                                                                           |                     |
| 38         | Storage                   | Supports Micro SD (1.5 TB), Support for recording to NAS                                                                                                                                                                                                                                                                     |                     |
| 39         | Alarms:                   | Alarm in x 4, Alarm out x 2                                                                                                                                                                                                                                                                                                  |                     |
| 40         | Operating Temp            | -40°C to 50°C, Need Inbuild Heater                                                                                                                                                                                                                                                                                           |                     |
| 41         | Humidity                  | 10% ~ 90%RH (no condensation) or better                                                                                                                                                                                                                                                                                      |                     |
| 42         | Approvals:                | CE, FCC, BIS ER:01 2024, IP66, RoHS, NDAA Compliant                                                                                                                                                                                                                                                                          |                     |
| 43         | Cyber Security compliance | The cameras offered must be cyber security certified with NDAA & ER 01:2024.                                                                                                                                                                                                                                                 |                     |
| <b>21.</b> | <b>ANPR Camera</b>        |                                                                                                                                                                                                                                                                                                                              |                     |
| 1          | Image Sensor:             | 1/2.8" 5MP Sony CMOS progressive sensor or better                                                                                                                                                                                                                                                                            |                     |
| 2          | Max Resolution:           | 2592 x 1944                                                                                                                                                                                                                                                                                                                  |                     |
| 3          | Lens                      | 5 ~ 50 mm or Better                                                                                                                                                                                                                                                                                                          |                     |
| 4          | Lens Type                 | CS/i-CS Mount, Remote Focus (ABF) or better                                                                                                                                                                                                                                                                                  |                     |
| 5          | Minimum Illumination:     | Colour 0.1 Lux, B/W 0.01 Lux                                                                                                                                                                                                                                                                                                 |                     |
| 6          | Max. Aperture:            | f/1.6                                                                                                                                                                                                                                                                                                                        |                     |
| 7          | Iris:                     | DC Auto Iris                                                                                                                                                                                                                                                                                                                 |                     |
| 8          | Field-of-View:            | H: 6.0° (tele) - 60.0° (wide)   V: 4.2° (tele) - 35.0° (wide)                                                                                                                                                                                                                                                                |                     |
| 9          | Shutter Speed:            | 1/3~1/10000 or more, manual                                                                                                                                                                                                                                                                                                  |                     |
| 10         | Day & Night Performance:  | Automatically removable IR-cut filter                                                                                                                                                                                                                                                                                        |                     |
| 11         | HDR                       | Required                                                                                                                                                                                                                                                                                                                     |                     |
| 12         | Image Settings:           | Brightness, Sharpness, Contrast, Saturation, Hue, White Balance, Exposure Control, Defog, 3DNR, 2DNR, Colour Noise reduction, HDR, EIS, Text Overlay, ROI (areas each for stream 1 and 2); Privacy Mask (5 areas); Motion Detection (4 areas); Tamper Detection, Audio Detection, Network Failure Detection, Shock Detection |                     |
| 13         | Video compression         | H.265 or better                                                                                                                                                                                                                                                                                                              |                     |
| 14         | Video streaming           | Quad streaming or better                                                                                                                                                                                                                                                                                                     |                     |
| 15         | Video resolution          | 2592 × 1944, 2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 1024, 1280 × 720, 1024 × 768, 800 × 600, 720 × 480, 640 × 480, 352 × 240, 320 × 240                                                                                                                                                                               |                     |
| 16         | Streaming                 | Unicast and Multicast streams. Quad streaming.                                                                                                                                                                                                                                                                               |                     |
|            |                           | Stream 01: 2592 x 1944 @30fps                                                                                                                                                                                                                                                                                                |                     |

| SNo. | Parameter           | Specifications                                                                                                                                                                                                                                                                                                                           | Compliance (Yes/No) |
|------|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                     | Stream 02: 1920 x 1080 @30fps                                                                                                                                                                                                                                                                                                            |                     |
|      |                     | Stream 03: 1920 x 1080 @30fps                                                                                                                                                                                                                                                                                                            |                     |
|      |                     | Stream 04: 320 x 240 @30fps                                                                                                                                                                                                                                                                                                              |                     |
|      |                     | At least Three streams should be at @60 fps with 1080p                                                                                                                                                                                                                                                                                   |                     |
| 17   | Frame rate          | 5MP at 25/30 fps and 2MP @50/60 fps                                                                                                                                                                                                                                                                                                      |                     |
| 18   | Rate Control        | LBR, CBR, CVBR                                                                                                                                                                                                                                                                                                                           |                     |
| 19   | Audio Compression   | G.726 (16/24/32/40 kbps), G.711 (ULaw/ALaw), AAC, PCM (128/256/384/768 kbps)                                                                                                                                                                                                                                                             |                     |
| 20   | Audio Streaming     | 2 Way                                                                                                                                                                                                                                                                                                                                    |                     |
| 21   | Audio Input         | Line-in and Built-in Mic                                                                                                                                                                                                                                                                                                                 |                     |
| 22   | Audio Output        | Line-out                                                                                                                                                                                                                                                                                                                                 |                     |
| 23   | Sytem               | PAL/NTSC                                                                                                                                                                                                                                                                                                                                 |                     |
| 24   | OSD                 | Date & Time, Text Contents, Image (Transparency 0-255)                                                                                                                                                                                                                                                                                   |                     |
| 25   | Connectors & button | Should have a compulsory Reset button, Audio In & Mic In (Line In) 3.5mm jack, RJ 45 Port, USB Type- A/C, Alarm I/O, RS485 Terminal                                                                                                                                                                                                      |                     |
| 26   | Interface           | 1Gbp Ethernet, RJ-45                                                                                                                                                                                                                                                                                                                     |                     |
| 27   | Security            | IP address filtering, HTTPS encrypted data transmission, SSL, multi-user authority, Password Security, CA Certificate, User Authentication/ HTTPS/ IP Filter/ IEEE 802.1x, TLS 1.3, SHA-256, DES, AES, User Access Log, TPM 2.0, FIPS 140                                                                                                |                     |
| 28   | Supported protocols | IPv4/v6, QoS, TCP, UDP, DHCP, UPnP, SNMP V3, LLDP, RTMP, RTP, RTSP, HTTP, VLAN, HTTPS, RTSPS, FTP, NTP, ONVIF: S, G, T, M                                                                                                                                                                                                                |                     |
| 29   | Browsers            | Google Chrome, Mozilla Firefox, Microsoft Edge                                                                                                                                                                                                                                                                                           |                     |
| 30   | Analytics           | Motion Detection, Tampering, Audio detection, Line Crossing, Object in zone, Object Counting (line cross, number of objects in Zone), Loitering, Parking Violation, Wrong Way, People gathering, Abandoned Object, Removed Object, Face Recognition, LPR Recognition, Auto Face Enrollment, Vehicle Recognition, Heat Map, PPE Detection |                     |
| 31   | Power supply        | PoE IEEE 802.3af, Class 3/DV 12V                                                                                                                                                                                                                                                                                                         |                     |
| 32   | Storage             | Supports Micro SD (1.5 TB), Support for recording to NAS                                                                                                                                                                                                                                                                                 |                     |
| 33   | Alarms:             | Alarm in x 2, Alarm out x 1                                                                                                                                                                                                                                                                                                              |                     |

| SNo.       | Parameter                 | Specifications                                                                                                                                                                                                                                                                                         | Compliance (Yes/No) |
|------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 34         | Operating Temp            | -50°C to 55°C, Need Inbuild Heater                                                                                                                                                                                                                                                                     |                     |
| 35         | Humidity                  | up to 90%RH (no condensation) or better                                                                                                                                                                                                                                                                |                     |
| 36         | Approvals:                | CE, FCC, BIS ER:01 2024, IP66, IK10, RoHS, NDAA Compliant                                                                                                                                                                                                                                              |                     |
| Housing    |                           |                                                                                                                                                                                                                                                                                                        |                     |
| 37         | Viewing Window:           | Tempered glass                                                                                                                                                                                                                                                                                         |                     |
| 38         | Construction:             | Die-cast aluminum alloy                                                                                                                                                                                                                                                                                |                     |
| 39         | Cabling:                  | 2x M16 waterproof cable glands                                                                                                                                                                                                                                                                         |                     |
| 40         | Fan:                      | 59° F (15° C) On; 77° F (25° C) Off (10 W)                                                                                                                                                                                                                                                             |                     |
| 41         | Power Input:              | 60W PoE IEEE 802.3at                                                                                                                                                                                                                                                                                   |                     |
| 42         | IR Features:              | 3 W; 163 ft (50 m) range                                                                                                                                                                                                                                                                               |                     |
| 43         | Coating:                  | White epoxy powder coating                                                                                                                                                                                                                                                                             |                     |
| 44         | Ratings:                  | Weather: IP66; Vandal: IK10                                                                                                                                                                                                                                                                            |                     |
| 45         | Operating Temperature:    | -58° F - 140° F (-50 °C - 60° C)                                                                                                                                                                                                                                                                       |                     |
| 46         | Cyber Security compliance | Weatherproof: IP66/68; Vandalproof: IK10                                                                                                                                                                                                                                                               |                     |
| <b>22.</b> | <b>Panoramic Camera</b>   |                                                                                                                                                                                                                                                                                                        |                     |
| 1          | Image Sensor:             | 1/1.6" 12.5 MP Sony CMOS progressive sensor or better                                                                                                                                                                                                                                                  |                     |
| 2          | Max Resolution:           | 3520 x 3520                                                                                                                                                                                                                                                                                            |                     |
| 3          | Focal Length:             | 1.7mm, (+/-) 0.1 mm                                                                                                                                                                                                                                                                                    |                     |
| 4          | IR Distance:              | 15 m or better                                                                                                                                                                                                                                                                                         |                     |
| 5          | Minimum Illumination:     | Colour 0.1 Lux, B/W 0.01 Lux                                                                                                                                                                                                                                                                           |                     |
| 6          | Field-of-View:            | 195° (at full resolution); 360° (surround view)                                                                                                                                                                                                                                                        |                     |
| 7          | Shutter Speed:            | Auto 1/3~1/10000 or more, manual                                                                                                                                                                                                                                                                       |                     |
| 8          | Day & Night Performance:  | Automatically removable IR-cut filter                                                                                                                                                                                                                                                                  |                     |
| 9          | WDR & HDR                 | Required                                                                                                                                                                                                                                                                                               |                     |
| 10         | Defog                     | Required                                                                                                                                                                                                                                                                                               |                     |
| 11         | Image Settings:           | Brightness, Sharpness, Contrast, Saturation, Hue, White Balance, Exposure Control, Defog, 3DNR, 2DNR, Colour Noise reduction, HDR, Text Overlay, ROI (areas each for stream 1 and 2); Privacy Mask (5 areas); Motion Detection (4 areas); Tamper Detection, Audio Detection, Network Failure Detection |                     |
| 12         | Video compression         | H.265 or better                                                                                                                                                                                                                                                                                        |                     |
| 13         | Video streaming           | Quad streaming or better                                                                                                                                                                                                                                                                               |                     |

| SNo. | Parameter                    | Specifications                                                                                                                                                                                                                                                                                                                                                                                                            | Compliance (Yes/No) |
|------|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 14   | Video resolution             | 3520 x 3520, 2992 x 2992, 1920 x 1080, 1280 x 1024, 1280 x 720, 1024 x 768, 800 x 600, 720 x 480, 640 x 480, 640x360, 640x512, 352x240                                                                                                                                                                                                                                                                                    |                     |
| 15   | Frame rate                   | 30fps or better                                                                                                                                                                                                                                                                                                                                                                                                           |                     |
| 16   | Edge Dewarping               | Required                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| 17   | Multiple Dewarp Display Mode | Digital PTZ, Panorama View, Single View ePTZ Dewarp, Two Views 180 Dewarp, Quad View ePTZ Dewarp                                                                                                                                                                                                                                                                                                                          |                     |
| 18   | Rate Control                 | LBR, CBR, CVBR                                                                                                                                                                                                                                                                                                                                                                                                            |                     |
| 19   | Audio Compression            | G.711, G.726, AAC, LPCM                                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| 20   | Audio Streaming              | 2 Way                                                                                                                                                                                                                                                                                                                                                                                                                     |                     |
| 21   | Audio I/O:                   | 1/1 (line in/line out), Microphone built-in, Speaker Line out                                                                                                                                                                                                                                                                                                                                                             |                     |
| 22   | Sytem                        | PAL/NTSC                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| 23   | OSD                          | Date & Time, Text Contents, Image (Transparency 0-255)                                                                                                                                                                                                                                                                                                                                                                    |                     |
| 24   | Connectors & button          | Should have a compulsory Reset button, PoE, Video, Data: RJ-45; Power: 12 VDC plug; Alarm In/Out: terminal block; Audio In/Out; Reset button                                                                                                                                                                                                                                                                              |                     |
| 25   | Interface                    | 1Gbp Ethernet, RJ-45                                                                                                                                                                                                                                                                                                                                                                                                      |                     |
| 26   | Security                     | Multi-user authentication with role-based access control, HTTP/RTSP Digest authentication, Account lockout protection, HTTPS (SSL/TLS) encryption, IP filtering (IPv4/IPv6), IEEE 802.1X (EAP-MD5/TLS 1.3/TTLS/PEAP), SNMP v3 (MD5/SHA-512, DES/AES), Certificate management (Self-signed & CA), Secure event transmission (SMTP/FTP/HTTP), System logging & audit trail, VLAN & QoS support, TPM 2.0, FIPS 140 compliant |                     |
| 27   | Supported protocols          | RTP/RTSP/RTSP (All four stream) over HTTP, RTP over UDP/TCP, MJPEG over HTTP, HTTP/HTTPS, TCP/IP, UDP, IPv4/IPv6, WebSocket, MQTT, SNMP v1/v2/v3, UPnP, LLDP, DDNS, RTMP, SMTP, FTP, HTTP Notification, IEEE 802.1X, QoS, VLAN, PPPoE, Multicast, ARP, ICMP, IGMP, NTP, ONVIF: S, G, T, M                                                                                                                                 |                     |
| 28   | Event Triggers               | External Input, Analytics, Network Failure Detection, Periodical Event, Manual Trigger                                                                                                                                                                                                                                                                                                                                    |                     |
| 29   | Event Actions                | External output Activation<br>Video and audio recording to edge storage<br>File Upload: FTP, network share and email<br>Notification: HTTP, FTP, email                                                                                                                                                                                                                                                                    |                     |







| SNo.       | Parameter                        | Specifications                                                                                                                                                                                     | Compliance (Yes/No) |
|------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 17         | Communication                    | Seamless communication between field personnel and management                                                                                                                                      |                     |
| 18         | Deployment Monitoring            | High-level overview of unit deployment and workforce coverage                                                                                                                                      |                     |
| 19         | Application Areas                | Infrastructure, transit, industrial inspections, security & rapid response                                                                                                                         |                     |
| <b>25.</b> | <b>Dashboard Camera Solution</b> |                                                                                                                                                                                                    |                     |
| 1          | Image Sensor                     | 1/3" progressive scan RGB CMOS or better, 1920x1080 or better                                                                                                                                      |                     |
| 2          | Day/ Night Operation             | Yes, with Built-in IR Cut Filter                                                                                                                                                                   |                     |
| 3          | Lens                             | 2.8 mm, F1.7                                                                                                                                                                                       |                     |
| 4          | Minimum Illumination             | Colour: 0.07 lux at 30 IRE, F1.7                                                                                                                                                                   |                     |
|            |                                  | B/W: 0.02 lux at 30 IRE, F1.7                                                                                                                                                                      |                     |
|            |                                  | 0 lux with IR illumination on                                                                                                                                                                      |                     |
| 5          | IR Illumination                  | Built in Or External Optimized IR with 15-meter range                                                                                                                                              |                     |
| 6          | Field of View                    | Horizontal field of view: 110° or better                                                                                                                                                           |                     |
| 7          | Electronic Shutter               | 1/20000 s or better                                                                                                                                                                                |                     |
| 8          | Compression                      | H.264/H.265 or better                                                                                                                                                                              |                     |
| 9          | Frame Rate and Bit Rate          | Upto 25 FPS/30 FPS at all resolutions with Controllable Bit Rate/ Bandwidth and Frame Rate                                                                                                         |                     |
| 10         | GOP/ GOV                         | Ability to change the GOP/GOV Length to optimize the bandwidth and storage                                                                                                                         |                     |
| 11         | Multi View Streams               | Up to 5 individually cropped out view areas                                                                                                                                                        |                     |
| 12         | Video Streams                    | Minimum 4 Streams @ H.265, 2MP, 25 fps/30 fps                                                                                                                                                      |                     |
| 13         | Motion Detection                 | Yes, built in with multiple configurable areas in the video stream                                                                                                                                 |                     |
| 14         | Image settings                   | WDR-120 db, Text over relay with Date & time, and a customer-specific text, camera name, graphical image etc                                                                                       |                     |
| 15         | Event Triggers                   | A. The camera shall be able to send and received trigger directly from any other camera without interface of VMS.<br>B. Intelligent Video, Edge Storage Events, Software Alarms, Camera Tampering. |                     |
| 16         | Edge Storage                     | Built in SD card slot with support of 512 GB SD card.                                                                                                                                              |                     |
| 17         | Storage                          | The Camers shall have the feature to directly record the videos/ images onto Nas without any Software                                                                                              |                     |

| SNo.       | Parameter                  | Specifications                                                                                                                                                                                                                                                                                            | Compliance (Yes/No) |
|------------|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 18         | Network Protocols          | IPv4/IPv6, RTP, TCP/IP, UDP/IP, HTTP, HTTPS, IGMP, ICMP, DHCP, DNS, SMTP, FTP, NTP, DDNS, QoS, SNMP, 802.1x                                                                                                                                                                                               |                     |
| 19         | Security                   | Password protection, IP address filtering, HTTPS encryption, IEEE 802.1x (EAP-TLS) network access control, Digest authentication, User access log, Centralized Certificate Management, brute force delay protection, signed firmware, Camera should check authenticity of firmware every time it reboots. |                     |
| 20         | Firmware Upgrade           | The firmware upgrade shall be done through web interface, The firmware shall be available free of cost                                                                                                                                                                                                    |                     |
| 21         | Logs                       | The camera shall provide minimum 150 logs of latest connections, access attempts, users connected, changes in the cameras etc                                                                                                                                                                             |                     |
| 22         | Memory                     | 1 GB RAM, 512 MB Flash                                                                                                                                                                                                                                                                                    |                     |
| 23         | Interface                  | RJ45: male, 10BASE-T/100BASE-TX or M12: female, rugged, D-coded with rotatable coupling nut.                                                                                                                                                                                                              |                     |
|            |                            | 3.5 mm audio in connector,                                                                                                                                                                                                                                                                                |                     |
|            |                            | 1 input, 1 output, 12 V DC/15 mA                                                                                                                                                                                                                                                                          |                     |
| 24         | Enclosure                  | IP66/67, IK10 or better, aluminium casing,                                                                                                                                                                                                                                                                |                     |
| 25         | Power requirements         | Power over Ethernet (PoE) IEEE                                                                                                                                                                                                                                                                            |                     |
|            |                            | 802.3af/802.3at Type 1 Class 2 or 3 Max.: 12 W                                                                                                                                                                                                                                                            |                     |
| 26         | Operating Temp & Humidity  | -5°C to 55°C & 10–100% RH (noncondensing)                                                                                                                                                                                                                                                                 |                     |
| 27         | Analytics                  | Motion Detection, Tampering, Shock detection, Line crossing, Loitering, Audio Detection The camera shall provide a platform allowing the upload of third-party applications into the camera                                                                                                               |                     |
| 28         | MAC compliant              | The MAC Addresses of all the camera supplied should be from OEM.                                                                                                                                                                                                                                          |                     |
| 29         | Audio                      | External microphone input or line input, built-in microphone                                                                                                                                                                                                                                              |                     |
| <b>26.</b> | <b>Drones</b>              |                                                                                                                                                                                                                                                                                                           |                     |
| 1          | Platform Type              | Drone / UAV Quadcopter                                                                                                                                                                                                                                                                                    |                     |
| 2          | Endurance (Tethered)       | Minimum 12 Hours Mission Time                                                                                                                                                                                                                                                                             |                     |
| 3          | Endurance (Untethered)     | Minimum 35 Minutes Flight Time                                                                                                                                                                                                                                                                            |                     |
| 4          | All Up Weight              | Maximum 20 Kilograms                                                                                                                                                                                                                                                                                      |                     |
| 5          | Maximum Operating Altitude | Up to 3000 meters AMSL                                                                                                                                                                                                                                                                                    |                     |

| SNo. | Parameter                      | Specifications                                      | Compliance (Yes/No) |
|------|--------------------------------|-----------------------------------------------------|---------------------|
| 6    | Maximum Operating Height (AGL) | Up to 125 meters Above Ground Level                 |                     |
| 7    | Payload Type                   | EO/IR Integrated Camera or other compatible sensors |                     |
| 8    | Anti-Jam GNSS Capability       | Anti-jam GNSS supported (Optional)                  |                     |
| 9    | Wind Resistance                | 35 kmph steady winds and 50 kmph gust resistance    |                     |
| 10   | Environmental Protection       | Water and Dust Resistant                            |                     |
| 11   | Operating Temperature          | -10°C to +55°C                                      |                     |
| 12   | Autonomous Operation           | Fully Autonomous Operation Supported                |                     |
| 13   | Hover Capability               | Hovering capability up to 125 meters                |                     |
| 14   | RF / GPS Protection            | Immune to RF and GPS jamming                        |                     |
| 15   | Communication Link             | Fiber Optic Data Link                               |                     |
| 16   | Acoustic Signature             | Minimal Decibel Count                               |                     |
| 17   | Visual Signature               | Incredibly Low Visual Signature                     |                     |
| 18   | Payload Flexibility            | Custom Payload Integration Supported                |                     |
| 19   | Imaging Capability             | Best-in-class Day/Night Combined Payloads           |                     |
| 20   | Safety Mechanisms              | Multiple onboard safety features                    |                     |
| 21   | Application                    | Border Control Operations                           |                     |
| 22   | Application                    | Military Force Protection                           |                     |
| 23   | Application                    | Perimeter Protection                                |                     |
| 24   | Application                    | Infrastructure Security & Monitoring                |                     |
| 25   | Application                    | Tactical & Frontline Support                        |                     |
| 26   | Application                    | Ad-hoc Telecom Tower Deployment                     |                     |
| 27   | Application                    | Surveillance of Forward Posts                       |                     |
| 28   | Application                    | Base Security for Military Compounds                |                     |
| 29   | Application                    | Effective Patrolling & Overwatch                    |                     |
| 30   | Application                    | Special Operations Support                          |                     |
| 31   | Application                    | Search & Rescue Operations                          |                     |
| 32   | Winch Control System           | Fully Automatic Motorized Winch Control System      |                     |
| 33   | Power Output                   | 3000W Standard Power Output                         |                     |
| 34   | Power Input                    | 220V AC Input Supply                                |                     |
| 35   | Release Mechanism              | Tension-based Release Mechanism                     |                     |
| 36   | Display Interface              | LCD Display for Important Parameters                |                     |
| 37   | Emergency Protection           | Emergency External Stop Switch                      |                     |
| 38   | Network Integration            | Fiber-optic integration with existing user network  |                     |
| 39   | Secure Communication           | Encrypted Secure Fiber-optic Communication          |                     |

| SNo.       | Parameter                          | Specifications                                                                                    | Compliance (Yes/No) |
|------------|------------------------------------|---------------------------------------------------------------------------------------------------|---------------------|
| 40         | Operational Requirement            | Minimal manpower required for operation                                                           |                     |
| 41         | Tether Cable Length                | Minimum 125 meters                                                                                |                     |
| 42         | Ground Control Station             | Personalized GCS Software                                                                         |                     |
| 43         | Mission Planning                   | Mission Planning Capability Supported                                                             |                     |
| 44         | GCS Hardware                       | Rugged MIL-grade Laptop                                                                           |                     |
| 45         | Operation Mode                     | One Touch Operation Supported                                                                     |                     |
| 46         | Fail-safe Feature                  | Automatic Return to Home on communication/power failure                                           |                     |
| 47         | GPS Redundancy                     | Multiple GPS modules onboard                                                                      |                     |
| 48         | Power Backup                       | Seamless switching to onboard battery during power failure                                        |                     |
| <b>27.</b> | <b>Local Processing Unit (LPU)</b> |                                                                                                   |                     |
| 1          |                                    | Local Processing Unit Shall be Aluminium Alloy Casing                                             |                     |
| 2          |                                    | Local Processing Unit Shall be of min. 9th Generation with Core i7 CPU                            |                     |
| 3          |                                    | It shall have 2 nos. LAN 16-bit DIO SATA, 4, COM, 6-48 V DC Wide Voltage Input                    |                     |
| 4          |                                    | It shall support GPU Intel HD Graphics 630 min.                                                   |                     |
| 5          |                                    | Memory DDR4 2133 MHz, up to 32 GB                                                                 |                     |
| 6          |                                    | Display Port 1 nos., VGA 1 nos. HDMI                                                              |                     |
| 7          |                                    | It shall support min. Secondary storage 2 X 2.5" SATA HDD/SSD Bay/ 1XM.2 2280 SATA Interface      |                     |
| 8          |                                    | It shall support min. USB 3.) (4) nos.                                                            |                     |
| 9          |                                    | It shall have LAN- 2 Nos. Intel I210T PCIe Gig. Ethernet, 1 nos. PCIe Gig Ethernet support iV Pro |                     |
| 10         |                                    | AC Input External Adaptor (Option)                                                                |                     |
| 11         |                                    | Voltage input- 100 VAC ~240 VAC @ 50~60Hz                                                         |                     |
| 12         |                                    | Temperature 0 ~ 70 Degree C                                                                       |                     |
| 13         |                                    | Storage Temperature 0 ~ 60 Degree C                                                               |                     |
| 14         |                                    | Certifications CE, FCC                                                                            |                     |

#### Group 4: Public Safety, Communication & Emergency Systems

| SNo.       | Parameter                       | Specifications                                                      | Compliance (Yes/No) |
|------------|---------------------------------|---------------------------------------------------------------------|---------------------|
| <b>28.</b> | <b>Emergency Call Box (ECB)</b> |                                                                     |                     |
| 1          | Field Side Equipment            | Construction: Cast Iron/Steel Foundation, Sturdy Body for equipment |                     |

| SNo.       | Parameter                             | Specifications                                                                                                                                                                                                                     | Compliance (Yes/No) |
|------------|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 2          |                                       | Call Button: Watertight Large Push Button, Visual Feedback for button press                                                                                                                                                        |                     |
| 3          |                                       | Connectivity: Ethernet                                                                                                                                                                                                             |                     |
| 4          |                                       | Sensors: For tempering/ vandalism                                                                                                                                                                                                  |                     |
| 5          |                                       | IP66, IK09 Protection                                                                                                                                                                                                              |                     |
| 6          |                                       | Operating Temperature 0 to 70 C                                                                                                                                                                                                    |                     |
| 7          |                                       | Speaking Distance minimum 5 ft                                                                                                                                                                                                     |                     |
| 8          |                                       | Inbuilt Class D Amplifier                                                                                                                                                                                                          |                     |
| 9          |                                       | Minimum 3 Inputs and 2 Output relay contacts                                                                                                                                                                                       |                     |
| 10         |                                       | ECB should be able to make calls to the PA system                                                                                                                                                                                  |                     |
| 1          | CCR Side Equipment                    | Central Software based server application capable of working on virtual environment/cloud with 100% redundancy for DC & DR. System should be capable for Secure connection of device as per international standard ISO 27001:2013. |                     |
| 2          |                                       | Access control mechanism would be also required to establish so that the usage is regulated.                                                                                                                                       |                     |
| 3          |                                       | Integration with VaMS and Command and control centre or any other component if required                                                                                                                                            |                     |
| 4          |                                       | PA Master Controller to have facility for multiple mic inputs, direct dialling buttons, LCD screen                                                                                                                                 |                     |
| 5          |                                       | Software Client for making Calls to PA and ECB                                                                                                                                                                                     |                     |
| 6          |                                       | Automatic Volume Control, Call recording of all ECB calls with date and time                                                                                                                                                       |                     |
| 7          |                                       | Operating temperature for control desk 0 to +60C                                                                                                                                                                                   |                     |
| <b>29.</b> | <b>PAS Amplifier</b>                  |                                                                                                                                                                                                                                    |                     |
| 1          | 125-Watt IP amplifier                 | 125-Watt IP amplifier with 70/100 Volt loudspeaker output                                                                                                                                                                          |                     |
| <b>30.</b> | <b>PAS Horn Speaker</b>               |                                                                                                                                                                                                                                    |                     |
| 1          | 30W Horn Speaker                      | 30W Horn Speaker                                                                                                                                                                                                                   |                     |
| <b>31.</b> | <b>Digital Handheld Wireless Sets</b> |                                                                                                                                                                                                                                    |                     |
| 1          | Device Type                           | Nationwide 4G LTE Push-to-Talk Handheld Device                                                                                                                                                                                     |                     |
| 2          | Communication Type                    | Private and Group Push-to-Talk Communication                                                                                                                                                                                       |                     |
| 3          | Connectivity                          | 4G LTE, 3G and Wi-Fi Connectivity                                                                                                                                                                                                  |                     |
| 4          | GPS Capability                        | GPS Location Tracking Supported                                                                                                                                                                                                    |                     |
| 5          | Audio Quality                         | Loud and Clear Audio with Noise Suppression                                                                                                                                                                                        |                     |
| 6          | Bluetooth                             | Bluetooth Enabled                                                                                                                                                                                                                  |                     |
| 7          | Emergency Button                      | Dedicated Emergency Alert Button                                                                                                                                                                                                   |                     |
| 8          | Lone Worker Protection                | Lone Worker Monitoring Supported                                                                                                                                                                                                   |                     |

| SNo.       | Parameter                                     | Specifications                                                                                                                                            | Compliance (Yes/No) |
|------------|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 9          | Man Down Alert                                | Automatic Man Down Detection Supported                                                                                                                    |                     |
| 10         | Fall Alert                                    | Fall Detection Supported                                                                                                                                  |                     |
| 11         | Channel Capacity                              | Multiple Channel Support                                                                                                                                  |                     |
| 12         | Contact Capacity                              | Large Contact List Support                                                                                                                                |                     |
| 13         | Battery Capacity                              | High-Capacity Li-Ion Battery                                                                                                                              |                     |
| 14         | Battery Backup                                | Long Duration Battery Backup                                                                                                                              |                     |
| 15         | GNSS Support                                  | GPS / GLONASS / Galileo / BeiDou Supported                                                                                                                |                     |
| 16         | Wi-Fi Standard                                | IEEE 802.11 Wi-Fi Support                                                                                                                                 |                     |
| 17         | SIM Capability                                | SIM Based LTE Communication                                                                                                                               |                     |
| 18         | Protection Rating                             | IP Rated Rugged Device                                                                                                                                    |                     |
| 19         | Encryption                                    | AES-256 Encryption Supported                                                                                                                              |                     |
| 20         | Operating Temperature                         | Industrial Operating Temperature Support                                                                                                                  |                     |
| 21         | Environmental Compliance                      | MIL-STD Rugged Compliance                                                                                                                                 |                     |
| 22         | Device Management                             | Over-the-Air Device Management Supported                                                                                                                  |                     |
| 23         | Push-to-Talk                                  | Instant Push-to-Talk Communication                                                                                                                        |                     |
| 24         | Real-Time Presence                            | Real-Time User Presence Supported                                                                                                                         |                     |
| 25         | GPS Tracking                                  | Real-Time User Tracking Supported                                                                                                                         |                     |
| 26         | Group Calling                                 | Group and Broadcast Calling Supported                                                                                                                     |                     |
| 27         | Secure Communication                          | Secure Nationwide Communication                                                                                                                           |                     |
| 28         | Cloud Integration                             | Motorola WAVE PTX Cloud Supported                                                                                                                         |                     |
| 29         | Mobile Integration                            | Mobile Application Integration Supported                                                                                                                  |                     |
| 30         | Dispatch Integration                          | Compatible with WAVE Dispatch Console                                                                                                                     |                     |
| <b>32.</b> | <b>ECB &amp; PA Control Desk Call Station</b> |                                                                                                                                                           |                     |
| 1          |                                               | Indoor IP based ECB and PA Control Desk Call Station with 8-inch Touch Display for centralized emergency communication and public announcement management |                     |
| 2          |                                               | High resolution capacitive touch screen display for call handling, monitoring and system operation                                                        |                     |
| 3          |                                               | Gooseneck Microphone Kit for live voice announcements and emergency communication                                                                         |                     |
| 4          |                                               | Integrated Desk Mount Kit suitable for control room / ICCC desk installation                                                                              |                     |
| 5          |                                               | Supports PA and ECB call initiation, monitoring and call management functions                                                                             |                     |
| 6          |                                               | Native IP / Ethernet based communication architecture                                                                                                     |                     |
| 7          |                                               | Supports SIP / VoIP based communication and integration with centralized server                                                                           |                     |



| SNo.       | Parameter        | Specifications                                                             | Compliance (Yes/No) |
|------------|------------------|----------------------------------------------------------------------------|---------------------|
| 8          |                  | Built-in speaker and microphone for handsfree communication                |                     |
| 9          |                  | User friendly graphical interface for quick access and operation           |                     |
| 10         |                  | Multiple programmable function keys for emergency and broadcast operations |                     |
| 11         |                  | Supports live announcements, recorded messages and zone selection          |                     |
| 12         |                  | Full duplex audio communication with echo cancellation and noise reduction |                     |
| 13         |                  | Compatible with centralized PA and ECB management software platform        |                     |
| 14         |                  | Real-time status indication and event monitoring facility                  |                     |
| 15         |                  | Suitable for 24x7 continuous operation in ICCC / Control Room environment  |                     |
| <b>33.</b> | <b>IP Phones</b> |                                                                            |                     |
| 1          |                  | Enterprise Grade IP Phone with SIP based communication support             |                     |
| 2          |                  | HD Voice Quality with wideband audio support                               |                     |
| 3          |                  | Backlit LCD / Color Display for call status and user interface             |                     |
| 4          |                  | Supports multiple SIP accounts and line appearances                        |                     |
| 5          |                  | Full Duplex Speakerphone with Acoustic Echo Cancellation                   |                     |
| 6          |                  | Dual 10/100/1000 Mbps Ethernet Ports with integrated switch                |                     |
| 7          |                  | Power over Ethernet (PoE) support as per IEEE 802.3af                      |                     |
| 8          |                  | Supports handset, handsfree and headset operation modes                    |                     |
| 9          |                  | Programmable DSS / Soft Keys for quick dialing and functions               |                     |
| 10         |                  | Supports Call Hold, Transfer, Forward, Conference and Redial functions     |                     |
| 11         |                  | Supports Caller ID, Call Waiting and Call History                          |                     |
| 12         |                  | XML / Web based configuration and centralized provisioning support         |                     |
| 13         |                  | Supports VLAN, QoS and Network Security features                           |                     |
| 14         |                  | Compatible with SIP based IP PBX and Unified Communication platforms       |                     |

| SNo.       | Parameter                          | Specifications                                                                                                                                                                                                                     | Compliance (Yes/No) |
|------------|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 15         |                                    | Supports IPv4 / IPv6 network protocols                                                                                                                                                                                             |                     |
| 16         |                                    | Wall Mount and Desktop installation support                                                                                                                                                                                        |                     |
| 17         |                                    | RJ45 Ethernet Interface for LAN connectivity                                                                                                                                                                                       |                     |
| 18         |                                    | Low power consumption with energy efficient operation                                                                                                                                                                              |                     |
| 19         |                                    | Operating Temperature suitable for indoor office environment                                                                                                                                                                       |                     |
| 20         |                                    | CE / FCC / RoHS compliant product                                                                                                                                                                                                  |                     |
| <b>34.</b> | <b>Public Address System (PAS)</b> |                                                                                                                                                                                                                                    |                     |
| 1          | Field Side Equipment               | Should have the capability to control individual PAS i.e. to make an announcement at select location (1:1) or multiple locations (1: many). The PAS should also support both, Live and Recorded inputs                             |                     |
| 2          |                                    | IP amplifier with minimum 250 Watts, Class D.                                                                                                                                                                                      |                     |
| 3          |                                    | Native IP connectivity, no convertors to be used                                                                                                                                                                                   |                     |
| 4          |                                    | 0 to 55 C Temperature rating for Amplifier                                                                                                                                                                                         |                     |
| 5          |                                    | Automatic Volume Control                                                                                                                                                                                                           |                     |
| 6          |                                    | Frequency Response: 50Hz to 15000 Hz for Amplifier                                                                                                                                                                                 |                     |
| 7          |                                    | 2Inputs and 1 Output relay contacts in Amplifier                                                                                                                                                                                   |                     |
| 8          |                                    | Speaker: Minimum 4 Speakers 30 W capacity                                                                                                                                                                                          |                     |
| 9          |                                    | Frequency Response of Speaker 350 -10,000Hz                                                                                                                                                                                        |                     |
| 10         |                                    | Line Monitoring Facility for speakers                                                                                                                                                                                              |                     |
| 11         |                                    | IP 55 Housing for amplifier                                                                                                                                                                                                        |                     |
| 1          | Control room Side Equipment        | Central Software based server application capable of working on virtual environment/cloud with 100% redundancy for DC & DR. System should be capable for Secure connection of device as per international standard ISO 27001:2013. |                     |
| 2          |                                    | Access control mechanism would be also required to establish so that the usage is regulated.                                                                                                                                       |                     |
| 3          |                                    | Integration with VaMS and Command and control centre or any other component if required                                                                                                                                            |                     |
| 4          |                                    | PA Master Controller to have facility for multiple mic inputs, direct dialling buttons, LCD screen                                                                                                                                 |                     |
| 5          |                                    | Software Client for making Calls to PA and ECB                                                                                                                                                                                     |                     |
| 6          |                                    | Automatic Volume Control, Call recording of all PA announcements with date and time                                                                                                                                                |                     |
| 7          |                                    | Operating temperature for control desk 0 to +60C                                                                                                                                                                                   |                     |
| <b>35.</b> | <b>Dispatcher Subscription</b>     |                                                                                                                                                                                                                                    |                     |

| SNo. | Parameter              | Specifications                                  | Compliance (Yes/No) |
|------|------------------------|-------------------------------------------------|---------------------|
| 1    | Application Type       | Browser-Based Dispatch Application              |                     |
| 2    | Deployment             | Cloud Based Centralized Communication Platform  |                     |
| 3    | Accessibility          | Accessible from Any Internet Connection         |                     |
| 4    | Communication Type     | Push-to-Talk Voice Dispatching                  |                     |
| 5    | Talkgroup Monitoring   | Monitor up to 20 Talkgroups                     |                     |
| 6    | Communication Modes    | One-to-One, Group and Broadcast PTT             |                     |
| 7    | Presence Monitoring    | Available, DND and Offline Status Monitoring    |                     |
| 8    | Talkgroup Scanning     | Priority Talkgroup Scanning Supported           |                     |
| 9    | Voice Messaging        | Voice Message Fallback Supported                |                     |
| 10   | Call Logging           | Call Logging Supported                          |                     |
| 11   | Call Recording         | Call Recording Supported                        |                     |
| 12   | Supervisory Override   | Supervisory Override Supported                  |                     |
| 13   | Alerts                 | Alert Notification Supported                    |                     |
| 14   | Messaging Support      | Integrated Multimedia Messaging                 |                     |
| 15   | Text Messaging         | Text Message Support up to 2000 Characters      |                     |
| 16   | Image Sharing          | GIF, JPEG, PNG Image Sharing Supported          |                     |
| 17   | Video Sharing          | MPEG-4 Video Sharing Supported                  |                     |
| 18   | Audio Sharing          | AAC and MP3 Audio Sharing Supported             |                     |
| 19   | Document Sharing       | PDF Attachment Sharing Supported                |                     |
| 20   | Location Sharing       | Real-Time Location Sharing Supported            |                     |
| 21   | Mapping Capability     | User Mapping and Tracking Supported             |                     |
| 22   | Geofencing             | Geofencing Supported                            |                     |
| 23   | Location History       | Location Replay and History Supported           |                     |
| 24   | Address Search         | Point of Interest and Address Search Supported  |                     |
| 25   | In-Map Communication   | Communication through Map Interface Supported   |                     |
| 26   | Processor Requirement  | Intel Core i5 or Above Recommended              |                     |
| 27   | RAM Requirement        | Minimum 8 GB RAM                                |                     |
| 28   | Operating System       | Windows 8.1/10 Pro or Enterprise                |                     |
| 29   | Browser Support        | Internet Explorer 11 and Chrome 45+             |                     |
| 30   | Internet Requirement   | Minimum 2 Mbps Internet Connectivity            |                     |
| 31   | Audio Device Support   | Headsets, Microphones and Speakers Supported    |                     |
| 32   | Platform Compatibility | Compatible with WAVE PTX Ecosystem              |                     |
| 33   | Dispatch Control       | Centralized Team Coordination Supported         |                     |
| 34   | Real-Time Coordination | Real-Time Communication and Resource Management |                     |
| 35   | Secure Access          | Secure Login and Access Control Supported       |                     |

#### Group 5: Network and Communication Infrastructure

| SNo. | Parameter   | Specifications | Compliance (Yes/No) |
|------|-------------|----------------|---------------------|
| 36.  | Core Router |                |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                | Compliance (Yes/No) |
|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 1    |           | 1U/2U or chassis based 19 Inch Rack mountable Ethernet switch.                                                                                                                                                                |                     |
| 2    |           | All Functionalities of Switch shall be IPv6 compliant, and it should work on IPv6 Platform without any additional hardware/ software.                                                                                         |                     |
| 3    |           | The switch shall be supplied with the latest Modular OS version                                                                                                                                                               |                     |
| 4    |           | Switch should support minimum 48x10/25G SFP28+ Ports and 8x40/100G QSFP28 from day 1.                                                                                                                                         |                     |
| 5    |           | Must offer system performance of at least 4000 Gbps switch bandwidth and 1000 Mpps forwarding rate.                                                                                                                           |                     |
| 6    |           | Switch should support dedicated/Virtual stacking with minimum 400Gbps of Cluster Capacity. Minimum 3meter Stacking cables and accessories should be supplied along with switches. Switch should support stacking upto 8 units |                     |
| 7    |           | Switch must support dual redundant FAN modules and Hot Swappable power supplies                                                                                                                                               |                     |
| 8    |           | Switch should support minimum 16GB RAM and 64GB flash/SSD                                                                                                                                                                     |                     |
| 9    |           | Should support minimum 250K MAC or more                                                                                                                                                                                       |                     |
| 10   |           | Should support minimum 200K IPV4 Routes                                                                                                                                                                                       |                     |
| 12   |           | Should support minimum 100K IPV6 Routes                                                                                                                                                                                       |                     |
| 13   |           | Should support IEEE standards: IEEE 802.3ab, IEEE 802.3z, IEEE 802.3ae, IEEE 802.3ad, IEEE 802.1ab, IEEE 802.1v                                                                                                               |                     |
| 14   |           | Vlan Ids:4000 or more and 4K active VLANs                                                                                                                                                                                     |                     |
| 15   |           | Switch should support IEEE 802.1d Spanning tree protocol                                                                                                                                                                      |                     |
| 16   |           | Switch should support 802.1s MSTP (Multiple instances of STP)                                                                                                                                                                 |                     |
| 17   |           | Switch should support 802.1w RSTP (Rapid spanning tree), Should support IP FRR/IRF /ITU G.8032 or equivalent for ring resiliency for fast/better convergence from day 1                                                       |                     |
| 18   |           | Networking Solution should support Loop Free topology with STAR, RING and Mesh architecture.                                                                                                                                  |                     |
| 19   |           | Switch should support 802.3ad Link Aggregation                                                                                                                                                                                |                     |
| 20   |           | Switch should support atleast 8 nos of 802.1p Priority Queues per port.                                                                                                                                                       |                     |

| SNo.       | Parameter            | Specifications                                                                                                                                                                        | Compliance (Yes/No) |
|------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 21         |                      | Switch should support IGMP Snooping, MLD v1/v2 from day 1, Multicast Groups-4K or more, switch should support BGP, OSPFv3 and EVPN/VxLAN or equivalent for future scalability.        |                     |
| 22         |                      | Switch should support Port mirroring/RSPAN                                                                                                                                            |                     |
| 23         |                      | Switch should support shall be supported with Ipv4/Ipv6: Static routing, PBR, RIPv2, RiPng and OSPFv2/v3                                                                              |                     |
| 24         |                      | Switch should be scalable to support BGP and IS-IS in same hardware.                                                                                                                  |                     |
| 25         |                      | Switch should support MAC and 802.1 X authentication                                                                                                                                  |                     |
| 26         |                      | Switch should support Radius and TACACS                                                                                                                                               |                     |
| 27         |                      | Switch should support out-of-band management Port, Console Port and USB port.                                                                                                         |                     |
| 28         |                      | Switch should support RMON (4 Groups)                                                                                                                                                 |                     |
| 29         |                      | Switch should support network management via SNMPv1/v2/v3                                                                                                                             |                     |
| 30         |                      | Switch Shall support Netflow/IPFIX/sflow for flow exports.                                                                                                                            |                     |
| 31         |                      | Switch should support for Config/image upload and download from TFTP/FTP servers.                                                                                                     |                     |
| 32         |                      | Switch should support 80MB or more packet buffer                                                                                                                                      |                     |
| 33         |                      | The switch shall conform to IEC-60950/CSA-60950/EN-60950/UL-60950, EN 300 386, CISPR 32, Class A, IEC 61000-4-5 standard for safety requirements of information technology equipment. |                     |
| 34         |                      | The offered equipment must be able to operate in the following environmental conditions                                                                                               |                     |
| 35         |                      | Operating temperature: 0°C to 45°C                                                                                                                                                    |                     |
| 36         |                      | Relative Humidity: 10% to 95% Non-condensing                                                                                                                                          |                     |
| 37         |                      | Switch MAC ID should reflect the OEM/Manufacturing Entity Name and it Should be available public domain to verify the same.                                                           |                     |
| 38         |                      | OEM Should be present in Latest IDC/Gartner Reports.                                                                                                                                  |                     |
| 39         |                      | Switching OEM Should have 15 years+ presence in India.                                                                                                                                |                     |
| <b>37.</b> | <b>Core Switches</b> |                                                                                                                                                                                       |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                               | Compliance (Yes/No) |
|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 1    |           | 1U/2U or chassis based 19 Inch Rack mountable Ethernet switch.                                                                                                                                                               |                     |
| 2    |           | All Functionalities of Switch shall be IPv6 compliant and it should work on IPv6 Platform without any additional hardware/ software.                                                                                         |                     |
| 3    |           | The switch shall be supplied with the latest Modular OS version                                                                                                                                                              |                     |
| 4    |           | Switch should support minimum 48x10/25G SFP28+ Ports and 8x40/100G QSFP28 from day 1.                                                                                                                                        |                     |
| 5    |           | Must offer system performance of at least 4000 Gbps switch bandwidth and 1000 Mpps forwarding rate.                                                                                                                          |                     |
| 6    |           | Switch should support dedicated/Virtual stacking with minimum 400Gbps of Cluster Capacity. Minimum 3meter Stacking cables and accessories should be supplied along with switches.Switch should support stacking upto 8 units |                     |
| 7    |           | Switch must support dual redundant FAN modules and Hot Swappable power supplies                                                                                                                                              |                     |
| 8    |           | Switch should support minimum 16GB RAM and 64GB flash/SSD                                                                                                                                                                    |                     |
| 9    |           | Should support minimum 250K MAC or more                                                                                                                                                                                      |                     |
| 10   |           | Should support minimum 200K IPV4 Routes                                                                                                                                                                                      |                     |
| 12   |           | Should support minimum 100K IPV6 Routes                                                                                                                                                                                      |                     |
| 13   |           | Should support IEEE standards:-IEEE 802.3ab,IEEE 802.3z,IEEE 802.3ae,IEEE 802.3ad,IEEE 802.1ab,IEEE 802.1v                                                                                                                   |                     |
| 14   |           | Vlan Ids:4000 or more and 4K active VLANs                                                                                                                                                                                    |                     |
| 15   |           | Switch should support IEEE 802.1d Spanning tree protocol                                                                                                                                                                     |                     |
| 16   |           | Switch should support 802.1s MSTP (Multiple instances of STP)                                                                                                                                                                |                     |
| 17   |           | Switch should support 802.1w RSTP (Rapid spanning tree), Should support IP FRR/IRF /ITU G.8032 or equivalent for ring resiliency for fast/better convergence from day 1                                                      |                     |
| 18   |           | Networking Solution should support Loop Free topology with STAR ,RING and Mesh architecture.                                                                                                                                 |                     |
| 19   |           | Switch should support 802.3ad Link Aggregation                                                                                                                                                                               |                     |
| 20   |           | Switch should support atleast 8 nos of 802.1p Priority Queues per port.                                                                                                                                                      |                     |
| 21   |           | Switch should support IGMP Snooping, MLD v1/v2 from day 1 , Multicast Groups-4K or more , switch should support BGP ,OSPFv3 and EVPN/VxLAN or equivalent for future scalability.                                             |                     |
| 22   |           | Switch should support Port mirroring/RSPAN                                                                                                                                                                                   |                     |
| 23   |           | Switch should support shall be supported with Ipv4/Ipv6: Static routing, PBR, RIPv2,RiPng and OSPFv2/v3                                                                                                                      |                     |

| SNo.       | Parameter                             | Specifications                                                                                                                                                                        | Compliance (Yes/No) |
|------------|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 24         |                                       | Switch should scalable to support BGP and IS-IS in same hardware.                                                                                                                     |                     |
| 25         |                                       | Switch should support MAC and 802.1 X authentication                                                                                                                                  |                     |
| 26         |                                       | Switch should support Radius and TACACS                                                                                                                                               |                     |
| 27         |                                       | Switch should support out-of-band management Port, Console Port and USB port.                                                                                                         |                     |
| 28         |                                       | Switch should support RMON ( 4 Groups )                                                                                                                                               |                     |
| 29         |                                       | Switch should support network management via SNMPv1/v2/v3                                                                                                                             |                     |
| 30         |                                       | Switch Shall support Netflow/IPFIX/sflow for flow exports.                                                                                                                            |                     |
| 31         |                                       | Switch should support for Config/image upload and download from TFTP/FTP servers.                                                                                                     |                     |
| 32         |                                       | Switch should support 80MB or more packet buffer                                                                                                                                      |                     |
| 33         |                                       | The switch shall conform to IEC-60950/CSA-60950/EN-60950/UL-60950, EN 300 386, CISPR 32, Class A, IEC 61000-4-5 standard for safety requirements of information technology equipment. |                     |
| 34         |                                       | The offered equipment must be able to operate in the following environmental conditions                                                                                               |                     |
| 35         |                                       | Operating temperature: 0°C to 45°C                                                                                                                                                    |                     |
| 36         |                                       | Relative Humidity: 10% to 95% Non-condensing                                                                                                                                          |                     |
| 37         |                                       | Switch MAC ID should reflect the OEM/Manufacturing Entity Name and it Should be available public domain to verify the same.                                                           |                     |
| 38         |                                       | OEM Should be present in Latest IDC/Gartner Reports.                                                                                                                                  |                     |
| <b>38.</b> | <b>L3 Managed Distribution Switch</b> |                                                                                                                                                                                       |                     |
| 1          |                                       | 1U/2U or chassis based 19 Inch Rack mountable Ethernet switch.                                                                                                                        |                     |
| 2          |                                       | All Functionalities of Switch shall be IPv6 compliant, and it should work on IPv6 Platform without any additional hardware/ software.                                                 |                     |
| 3          |                                       | The switch shall be supplied with the latest Modular OS version                                                                                                                       |                     |
| 4          |                                       | Switch should support minimum 48x10/25G SFP28+ Ports and 8x40/100G QSFP28 from day 1.                                                                                                 |                     |
| 5          |                                       | Must offer system performance of at least 4000 Gbps switch bandwidth and 1000 Mpps forwarding rate.                                                                                   |                     |
| 6          |                                       | Switch should support dedicated/Virtual stacking port with minimum 400Gbps of Stacking/Cluster                                                                                        |                     |

| SNo. | Parameter | Specifications                                                                                                                                                          | Compliance (Yes/No) |
|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | Capacity. Minimum 3meter Stacking cables and accessories should be supplied along with switches. Switch should support stacking upto 8 units                            |                     |
| 7    |           | Switch must support dual redundant FAN modules and Hot Swappable power supplies                                                                                         |                     |
| 8    |           | Switch should support minimum 16GB RAM and 64GB flash/SSD                                                                                                               |                     |
| 9    |           | Should support minimum 250K MAC or more                                                                                                                                 |                     |
| 10   |           | Should support minimum 200K IPV4 Routes                                                                                                                                 |                     |
| 11   |           | Should support minimum 100K IPV6 Routes                                                                                                                                 |                     |
| 12   |           | Should support minimum 100K multicast entries/routes                                                                                                                    |                     |
| 13   |           | Should support IEEE standards: IEEE 802.3ab, IEEE 802.3z, IEEE 802.3ae, IEEE 802.3ad, IEEE 802.1ab, IEEE 802.1v                                                         |                     |
| 14   |           | Vlan Ids:4000 or more and 4K active VLANs                                                                                                                               |                     |
| 15   |           | Switch should support IEEE 802.1d Spanning tree protocol                                                                                                                |                     |
| 16   |           | Switch should support 802.1s MSTP (Multiple instances of STP)                                                                                                           |                     |
| 17   |           | Switch should support 802.1w RSTP (Rapid spanning tree), Should support IP FRR/IRF /ITU G.8032 or equivalent for ring resiliency for fast/better convergence from day 1 |                     |
| 18   |           | Networking Solution should support Loop Free topology with STAR, RING and Mesh architecture.                                                                            |                     |
| 19   |           | Switch should support 802.3ad Link Aggregation                                                                                                                          |                     |
| 20   |           | Switch should support at least 8 nos of 802.1p Priority Queues per port.                                                                                                |                     |
| 21   |           | Switch should support IGMP Snooping, MLD v1/v2 from day 1, Multicast Groups-4K or more, switch should support BGP, OSPFv3 and EVPN/VxLAN for future scalability.        |                     |
| 22   |           | Switch should support Port mirroring/RSPAN                                                                                                                              |                     |
| 23   |           | Switch should support shall be supported with Ipv4/Ipv6: Static routing, PBR, RIPv2, RiPng and OSPFv2/v3                                                                |                     |
| 24   |           | Switch should be scalable to support BGP and IS-IS in same hardware.                                                                                                    |                     |
| 25   |           | Switch should support MAC and 802.1 X authentication                                                                                                                    |                     |
| 26   |           | Switch should support Radius and TACACS                                                                                                                                 |                     |



| SNo. | Parameter | Specifications                                                                                                                                                                        | Compliance (Yes/No) |
|------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 27   |           | Switch should support out-of-band management Port, Console Port and USB port.                                                                                                         |                     |
| 28   |           | Switch should support RMON (4 Groups)                                                                                                                                                 |                     |
| 29   |           | Switch should support network management via SNMPv1/v2/v3                                                                                                                             |                     |
| 30   |           | Switch Shall support Netflow/IPFIX/sflow for flow exports.                                                                                                                            |                     |
| 31   |           | Switch should support for Config/image upload and download from TFTP/FTP servers.                                                                                                     |                     |
| 32   |           | Switch should support 32MB or more packet buffer                                                                                                                                      |                     |
| 33   |           | The switch shall conform to IEC-60950/CSA-60950/EN-60950/UL-60950, EN 300 386, CISPR 32, Class A, IEC 61000-4-5 standard for safety requirements of information technology equipment. |                     |
| 34   |           | The offered equipment must be able to operate in the following environmental conditions                                                                                               |                     |
| 35   |           | Operating temperature: 0°C to 45°C                                                                                                                                                    |                     |
| 36   |           | Relative Humidity: 10% to 95% non-condensing                                                                                                                                          |                     |
| 37   |           | Switch MAC ID should reflect the OEM/Manufacturing Entity Name, and it Should be available public domain to verify the same.                                                          |                     |
| 38   |           | OEM Should be present in Latest IDC/Gartner Reports.                                                                                                                                  |                     |
| 39   |           | Switching OEM Should have 15 years+ presence in India.                                                                                                                                |                     |

#### Group 6: Cyber Security Infrastructure

| SNo.       | Parameter                | Specifications                                                                                                                                                                                            | Compliance (Yes/No) |
|------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| <b>39.</b> | <b>Firewall</b>          |                                                                                                                                                                                                           |                     |
| A1         | A. Hardware Architecture | The appliance-based security platform should provide firewall, Application Control, Antimalware/Antivirus, Web Filtering and IPS functionality in a single appliance from day one                         |                     |
| A2         |                          | The appliance should support atleast 8x 10GE SFP+/SFP, 8 x GE RJ45, dual Hot Swappable Power Supply from dayone. And also have provision for 4x GE Slots SFP along with dedicated management and HA port. |                     |
| A3         |                          | The appliance hardware should be a multicore CPU architecture with a hardened 64-bit operating system.                                                                                                    |                     |

| SNo. | Parameter                    | Specifications                                                                                                                                                                       | Compliance (Yes/No) |
|------|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| A4   |                              | Proposed Firewall can be ASIC based in nature / open architecture based on multi-core cpu to protect & scale against dynamic latest security threats.                                |                     |
| B1   | B. Performance & Scalability | Firewall shall support Transparent and NAT/Route modes concurrently using Virtual Contexts. Minimum 10 Virtual Firewall licenses required                                            |                     |
| B2   |                              | Firewall shall support a minimum of 30 Gbps application control throughput/ firewall throughput in real-world environment including AVC (Application Visibility Control) and logging |                     |
| B3   |                              | Firewall shall deliver minimum 25 Gbps NGFW Threat Prevention throughput with all features enabled (Application, NGIPS, AV, AM, logging).                                            |                     |
| B4   |                              | Architecture shall separate Control Plane (management) and Data Plane (security and network processing). This separation can be physical or logical.                                 |                     |
| B5   |                              | Firewall must be a single appliance with redundant fans and hot-swappable power supplies                                                                                             |                     |
| B6   |                              | Firewall shall support at least 12 million concurrent sessions.                                                                                                                      |                     |
| B7   |                              | Firewall shall support at least 700,000 connections per second.                                                                                                                      |                     |
| B8   |                              | Firewall shall support 50 Gbps IPSec VPN throughput or higher.                                                                                                                       |                     |
| B9   |                              | Appliance must include TPM chip to protect cryptographic keys and passwords from tampering or phishing.                                                                              |                     |
| C1   | C. Firewall Features         | Firewall shall support access-rules based on IPv4/IPv6, user/groups, application, geolocation, URL, zones, VLAN, etc.                                                                |                     |
| C2   |                              | Support for manual and auto NAT, Static NAT, Dynamic NAT, Dynamic PAT.                                                                                                               |                     |
| C3   |                              | Support for NAT64, NAT66, and DHCPv6 from day one.                                                                                                                                   |                     |
| C4   |                              | Support Static, OSPF, OSPFv3, and BGP routing protocols.                                                                                                                             |                     |
| C5   |                              | Support multicast protocols including IGMP and PIM                                                                                                                                   |                     |
| C6   |                              | Detect, log, and take action against network traffic using over 3,500 application signatures.                                                                                        |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                | Compliance (Yes/No) |
|------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| C7   |           | Application signatures must be manually and automatically updatable.                                                                                                                                                                                          |                     |
| C8   |           | Administrator shall define application control policies by application group or list                                                                                                                                                                          |                     |
| C9   |           | System must provide automatic inspection for traffic using non-standard ports.                                                                                                                                                                                |                     |
| C10  |           | IPS module must support 18,000+ signatures and import Snort/Suricata format                                                                                                                                                                                   |                     |
| C11  |           | Provide IP reputation feeds with regularly updated global databases.                                                                                                                                                                                          |                     |
| C12  |           | Support integration of third-party and custom IP reputation feeds, including global blacklist                                                                                                                                                                 |                     |
| C13  |           | Support DNS-based threat intelligence feeds.                                                                                                                                                                                                                  |                     |
| C14  |           | OEM must operate its own global Threat Intelligence and Analysis Center.                                                                                                                                                                                      |                     |
| C15  |           | Detection engine should identify reconnaissance, buffer overflow, VoIP, and P2P attacks                                                                                                                                                                       |                     |
| C16  |           | Support geo-location-based threat detection and blocking.<br><br>Ability to sanitize Microsoft Office documents and PDF files by stripping harmful active content (hyperlinks, embedded media, JavaScript, macros) while preserving textual content integrity |                     |
| C17  |           | Engine must detect variants of known and unknown threats (zero-day).                                                                                                                                                                                          |                     |
| C18  |           | Provide SD-WAN features with path measurement (jitter, latency, packet loss).                                                                                                                                                                                 |                     |
| C19  |           | Support URL-based threat intelligence feeds.                                                                                                                                                                                                                  |                     |
| C20  |           | Support WAN load balancing algorithms – volume, session, IP-based, spillover.                                                                                                                                                                                 |                     |
| C21  |           | Provide AV and file blocking per-policy or user group for HTTP, SMTP, POP3, IMAP, FTP, etc                                                                                                                                                                    |                     |
| C22  |           | Integrated web content filtering solution without external devices/modules.                                                                                                                                                                                   |                     |
| C23  |           | Query real-time URL database with 110M+ websites categorized in 70+ categories                                                                                                                                                                                |                     |
| C24  |           | Allow web filtering per policy or per user for HTTP and HTTPS traffic.                                                                                                                                                                                        |                     |
| C25  |           | Include blocking of web plug-ins (ActiveX, Java, Cookies), URL blocking, and exempt lists                                                                                                                                                                     |                     |

| SNo. | Parameter                    | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                             | Compliance (Yes/No) |
|------|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| C26  |                              | Firewall must support post-quantum cryptography algorithms such as ML-KEM, BIKE, HQC, Frodo                                                                                                                                                                                                                                                                                                                                                |                     |
| C27  |                              | Integrated traffic shaping and bandwidth management functionality                                                                                                                                                                                                                                                                                                                                                                          |                     |
| D1   | D. High Availability         | Support Active/Active and Active/Standby failover modes.                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| D2   |                              | Support EtherChannel or equivalent for redundancy and failover control                                                                                                                                                                                                                                                                                                                                                                     |                     |
| D3   |                              | Support redundant interfaces to ensure link-level redundancy.                                                                                                                                                                                                                                                                                                                                                                              |                     |
| D4   |                              | Support IEEE 802.3ad link aggregation for bandwidth increase and redundancy.                                                                                                                                                                                                                                                                                                                                                               |                     |
| D5   |                              | Include integrated redundant hot-swappable power supplies.                                                                                                                                                                                                                                                                                                                                                                                 |                     |
| D6   |                              | Support automatic traffic redirection from failed links to healthy ones.                                                                                                                                                                                                                                                                                                                                                                   |                     |
| E1   | E. Management & OEM Criteria | Firewall on-device manager and proposed external manager should have GUI access over standard browser. In case of firewall manager fails, device should be access through on device manager using standard browser for networks and security policy                                                                                                                                                                                        |                     |
| E2   |                              | OEM must not be blacklisted in the last three years by any government body.                                                                                                                                                                                                                                                                                                                                                                |                     |
| E3   |                              | OEM must have a local representative or authorized support presence in the India.                                                                                                                                                                                                                                                                                                                                                          |                     |
| E4   |                              | Include 5-year licenses for all major services – Firewall, VPN, IPS, URL Filtering, Anti-Bot, APT, Antivirus, Anti-Spam, DNS and 24x7 Support.                                                                                                                                                                                                                                                                                             |                     |
| E5   |                              | All throughput must be achieved from a single appliance. Clustering/stacking (N+1) not accepted.                                                                                                                                                                                                                                                                                                                                           |                     |
| E6   |                              | Firewall family or operating system must have valid EAL4 certification or higher.                                                                                                                                                                                                                                                                                                                                                          |                     |
| E7   |                              | Proposed solution must preferably have same Single OS at all layers to manage and provide complete centralized control over office networking. Solution must have facility to have security grid with automation capability to create key stiches using inetgrations out of the box for firewalls, Switches, routers and AP's which should be monitored basis regular triggers to provide automated action capability. All the events/logs |                     |

| SNo.       | Parameter                             | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Compliance (Yes/No) |
|------------|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|            |                                       | from Firewall, Switches, APs, Router should be stored in a single solution proposed.                                                                                                                                                                                                                                                                                                                                                                                                                           |                     |
| E8         |                                       | OEM should be present in latest Gartner's Leader quadrant                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                     |
| E9         |                                       | Complete solution should be from single OEM to support secured, homogeneous to support seamless integration solution.                                                                                                                                                                                                                                                                                                                                                                                          |                     |
| <b>40.</b> | <b>WAF &amp; Server Load Balancer</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                     |
| 1          |                                       | The appliance should be high performance purpose built next generation multi-tenant hardware with Network function virtualization . The Appliance should support multiple network functions virtualization with dedicated hardware resources for each virtual instance. The Device should have 2 Virtual Instance from day 1 and scalable upto 12 Instances on license upgrade. It should also run 3rd party and open source network functions on same appliance like Linux- CentOS/Ubuntu based applications. |                     |
| 2          |                                       | The Appliance should have 8*10GbE SFP+ ports and minimum 4 TB HDD and dual power supply.                                                                                                                                                                                                                                                                                                                                                                                                                       |                     |
| 3          |                                       | The WAF OEM should be different from Firewall OEM and WAF OS and SLB OS should be different.                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| 4          |                                       | The appliance should support L7 RPS should be 10 Million and support 50 K SSL TPS for RSA 2K key, 35 K SSL TPS for ECDSA P25.                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| 5          |                                       | WAF should support in-line modes- Bridge, routed, transparent mode, reverse proxy mode and out of path ( TAP/SPAN).                                                                                                                                                                                                                                                                                                                                                                                            |                     |
| 6          |                                       | The WAF should support negative and positive security model The positive Security recognizes the characteristics of normal application traffic by automatic traffic learning in order to form the positive security model (whitelist model), which allows only traffic matching these whitelists to pass.                                                                                                                                                                                                      |                     |
| 9          |                                       | The WAF should detect and block SQL injection attacks, support injection detection based on get, post, cookie, etc., and support the detection of code bypassing SQL injection; The WAF should prevent XSS cross-site attacks, including the detection of storage and reflection cross-site                                                                                                                                                                                                                    |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                         | Compliance (Yes/No) |
|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | methods, and the detection of code bypassing XSS cross-site attacks.                                                                                                                                                                                                                                   |                     |
| 10   |           | The solution should provide full ipv6 support and OEM should be IPv6 gold-certified. OEM should be listed vendor for ipv6 phase-2 certification.                                                                                                                                                       |                     |
| 11   |           | The WAF should protect against command injection attacks, such as Linux and Windows system command execution; The WAF should protect against common types of injection attacks, including SSI, LDAP, XPATH, mail header, file injection, etc.                                                          |                     |
| 13   |           | The WAF should protect application layer and Network DOS attacks, support application layer resource consumption type denial of service attack detection and denial of service attack detection caused by malformed data and malformed protocol.                                                       |                     |
| 14   |           | The WAF should prevent attacks against session tampering and hijacking, including attacks against cookie, session and user parameters, and can prevent attacks such as directory traversal attacks and CSRF attacks.                                                                                   |                     |
| 15   |           | The solution should support server load balancing algorithms i.e. round robin, weighted round robin, least connection, Persistent IP, Hash IP, Hash Cookie, consistent hash IP, shortest response, proximity, SNMP, SIP session ID, hash header etc.                                                   |                     |
| 16   |           | The solution should support Multi-level virtual service policy routing,-Static, default and backup policies for intelligent traffic distribution to backend servers                                                                                                                                    |                     |
| 17   |           | The WAF should support Web Anti-Defacement (WAD) function to detect and prevent the defaced web pages from being returned to the client. It should returns the cached original web page to make the anti-defacement effects unnoticeable or returns a 503-error page to the client to end the service. |                     |
| 18   |           | The solution should provide application & server health checks for well-known protocols such as ARP, ICMP, TCP, DNS, RADIUS, HTTP/HTTPS, RTSP etc.                                                                                                                                                     |                     |
| 19   |           | The solution must support Single Sign-On (SSO) for web-based applications and web-based file server                                                                                                                                                                                                    |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                              | Compliance (Yes/No) |
|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | access. It should also support SAML secure application access                                                                                                                                                                                                                                                                                               |                     |
| 20   |           | The solution should provide comprehensive and reliable support for high availability and N+1 clustering based on Standard VRRP Per VIP based Active-active & active standby unit redundancy mode.                                                                                                                                                           |                     |
| 21   |           | The access control of black- and whitelists should be supported, and global and local settings should be supported.                                                                                                                                                                                                                                         |                     |
| 22   |           | The WAF support access control based on client source IP, server URL and port.                                                                                                                                                                                                                                                                              |                     |
| 23   |           | The WAF should support IP reputation subscription to protect against Botnet, Cybercrime, Phishing, SPAM, TOR, scanners etc.                                                                                                                                                                                                                                 |                     |
| 24   |           | The WAF should support Access control based on GeoIP regions: The administrator can generate IP blacklist based on the IP region table to achieve the region-based access control. The WebUI can generate and display region-based statistics graphs/security events.                                                                                       |                     |
| 25   |           | The WAF should have auto-learning feature, enhancing network security through real-time traffic analysis. It automatically generates IP subnets for protection by continuously learning network patterns. One for querying the status and details of the network model learning, and another for resetting the learned model to refine security strategies. |                     |
| 26   |           | The Web Application Firewall (WAF) must support HTTP/2 and HTTP/1.1 for both communications.                                                                                                                                                                                                                                                                |                     |
| 32   |           | WAF should support Browser fingerprint for identification and tracking technology that relies on various characteristics such as browser type, version, installed plugins, screen resolution, and other system parameters of the user's network environment rather than IP addresses.                                                                       |                     |
| 33   |           | The solution should support certificate parser, and solution should integrate with client certificates to maintain end to end security and non-repudiation. It should support Certificate format as                                                                                                                                                         |                     |

| SNo.       | Parameter              | Specifications                                                                                                                                                                                                                                                                                                                                                                                                    | Compliance (Yes/No) |
|------------|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|            |                        | "OpenSSL/Apache, *.PEM", "MS IIS, *.PFX", and "Netscape, *.DB".                                                                                                                                                                                                                                                                                                                                                   |                     |
| 34         |                        | It should support advance functions Authoritative name sever, DNS proxy/DNS NAT, full DNS server with DNSEC, DNS DDOS, application load balancing from day one. It should be capable of handling complete Full DNS bind records including A,MX, AAAA, CNAME, PTR, SOA etc.                                                                                                                                        |                     |
| 35         |                        | The solution should have license upgrade feature on same appliance to support machine authentication based on combination of HDD ID, CPU info and OS related parameters i.e. mac address to provide secure access/authentication to corporate resources.                                                                                                                                                          |                     |
| 36         |                        | The WAF should have reports which can be generated according to time, and the report graphics can be set to column, bar, and pie charts. Reports can be exported to multiple formats, such as PDF, HTML and Excel; The WAF should have reports which can be automatically generated on a regular basis, such as daily, weekly, and monthly; the reports can be sent to the designated recipient via FTP or email. |                     |
| <b>41.</b> | <b>DDOS Protection</b> |                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| 1          |                        | The proposed solution should have dedicated DDoS protection device not as add on license Feature on ADC and NGFW. The solution should have external bypass functionality.                                                                                                                                                                                                                                         |                     |
| 2          |                        | The proposed solution should detect and mitigate both network- layer DDoS attacks and advanced application layer attacks.                                                                                                                                                                                                                                                                                         |                     |
| 3          |                        | The proposed solution should have the capability to be configured in detect as well as protect mode.                                                                                                                                                                                                                                                                                                              |                     |
| 4          |                        | The proposed solution should be deployed in inline mode ( L2 & L3) and SPAN/TAP mode (out of path).                                                                                                                                                                                                                                                                                                               |                     |
| 5          |                        | The proposed solution should prevent suspicious traffic for threats and blocking malicious traffic.                                                                                                                                                                                                                                                                                                               |                     |
| 6          |                        | The Solution must have 50 K SSL TPS for RSA 2K key and 35 K SSL TPS for ECDSA P25 and L7 RPS should be 6 million and L4 CPS should be 4 million.                                                                                                                                                                                                                                                                  |                     |



| SNo. | Parameter | Specifications                                                                                                                                                                                                                                     | Compliance (Yes/No) |
|------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 7    |           | The Appliance should have dedicated 8x10GbE SFP+ ports (SX Fiber incl.) and Minimum 4TB SSD and dual power supply.                                                                                                                                 |                     |
| 8    |           | Should protect ICMP attacks: ICMP floods, ping floods, smurf, IP Spoofing, LAND attack, Teardrop, IP Option Timestamp, IP Option Route Record, IP Option Source Route, Ping of Death, Tracert, ICMP Redirect, ICMP Unreachable, ICMP Large Packet. |                     |
| 9    |           | The solution should support protection policy for L3 protocol (IP), L4 protocol (TCP, UDP, ICMP) and layer 7 protocol SSL handshake attack                                                                                                         |                     |
| 10   |           | Should protect TCP based attacks: TCP SYN Flood, TCP SYN-ACK Flood, TCP ACK Flood, TCP FIN/RST Flood, TCP Connection Flood, TCP Slow Connection, TCP Abnormal Connection, TCP Fragments Flood, Defence WinNuke, TCP Error Flag                     |                     |
| 11   |           | Should protect UDP based attacks: UDP Flood, UDP Fragment Flood, UDP Fingerprint, Fraggle, UDP Large Packet                                                                                                                                        |                     |
| 12   |           | Should protect HTTP & HTTPS based attacks: HTTP GET Flood, HTTP POST Flood, HTTP Slowloris, HTTP Slow POST, HTTP URL monitor, SSL Handshake, SSL Renegotiation                                                                                     |                     |
| 13   |           | Should protect DNS based attacks: DNS Cache Poisoning Defense, DNS Length Check Defense , DNS NXDomain Defense, DNS Query Flood Defense , DNS Reply Flood Defense, DNS TTL Check , DNS Source Authentication                                       |                     |
| 14   |           | The solution should support Brute Force attack mitigation                                                                                                                                                                                          |                     |
| 15   |           | The solution should support the behaviour based DDOS mitigation.                                                                                                                                                                                   |                     |
| 16   |           | The solution should provide the traffic AUTO learning function for the DDOS traffic monitoring                                                                                                                                                     |                     |
| 17   |           | The traffic Auto learning threshold can be applied automatically after auto learning completed.                                                                                                                                                    |                     |
| 18   |           | The solution should provide the multi-level DDOS mitigation policy and different mitigation action based on DDOS traffic type.                                                                                                                     |                     |
| 19   |           | The solution should Access control list for IP, TCP, UDP, DNS, HTTP, URL, blacklist and whitelist,                                                                                                                                                 |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                         | Compliance (Yes/No) |
|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 20   |           | The solution should support Access control list based on inbound GeolIP with configurable duration.                                                                                                                                                                    |                     |
| 21   |           | The solution should be able to import third party IP database through File or URL.                                                                                                                                                                                     |                     |
| 22   |           | The system should support IPv4 and IPv6 dual stack without deteriorating performance                                                                                                                                                                                   |                     |
| 23   |           | The solution shall have built-in high availability (HA) features in the following mode: Active-Passive, Active-Active using VRRP                                                                                                                                       |                     |
| 24   |           | The solution shall be able to immediately support both IPv4 and IPv6 and implements dual stack architecture.                                                                                                                                                           |                     |
| 25   |           | The solution must be able to integrate with existing management system via SNMP version 3 and SNMP version 2                                                                                                                                                           |                     |
| 26   |           | The solution must provide the latest Management Information Base (MIB) file for SNMP operation.                                                                                                                                                                        |                     |
| 27   |           | The solution log shall contain the following information: Attack logging like Source IP, Destination IP, Destination Port, Group Name, Service Name, Protocol Attack Type, Action, Anomaly Count, DDoS Attack and logging to Syslog                                    |                     |
| 28   |           | The solution shall provide the flexibility of performing configuration via GUI and command base remotely.                                                                                                                                                              |                     |
| 29   |           | The solution should support IPv6 as well as IPv4 and have the ability to turn IPv4/IPv6 traffic to IPv6/IPv4 traffic on the backend and the solution should be IPv6 ready logo certified from the day 1 and OEM should be listed vendor for ipv6 phase-2 certification |                     |
| 30   |           | The solution shall be able to export syslog to existing syslog server and SIEM system.                                                                                                                                                                                 |                     |
| 31   |           | The solution shall support the provisioning of the reports - Attack reports -top sources, targets, attack type, Attack Severity Distribution, Attack Source Region                                                                                                     |                     |
| 32   |           | The solution must be able to generate summary attack report of daily/weekly/monthly                                                                                                                                                                                    |                     |
| 33   |           | The solution must provide packet capture for debugging.                                                                                                                                                                                                                |                     |

| SNo.       | Parameter                                       | Specifications                                                                                                                                                                                        | Compliance (Yes/No) |
|------------|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| <b>42.</b> | <b>Network Intrusion Detection System (IDS)</b> |                                                                                                                                                                                                       |                     |
| 1          |                                                 | Scope: Supply, install, configure, test, commission Network Intrusion Detection System (NIDS) sensors and central manager with licenses for entire contract period; integrate with existing SOC/SIEM. |                     |
| 2          |                                                 | Compliance: Adherence to CERT-In Directions dated 28-Apr-2022 incl. 6-hour incident reporting, 180-day log retention in India, and NTP sync with NIC/NPL traceable servers.                           |                     |
| 3          |                                                 | Architecture: Out-of-band NIDS sensors (SPAN/TAP); option to run inline in fail-open for PoC only; centralized manager (appliance/VM) with MFA and RBAC.                                              |                     |
| 4          |                                                 | IPv4/IPv6 Dual Stack: Full detection on IPv4 and IPv6 traffic; interoperability per TEC IPv6 conformance guidance.                                                                                    |                     |
| 5          |                                                 | Detection Methods: Signature, protocol anomaly, and behavior/ML-based detection for L2–L7 including HTTP/2/3, TLS/QUIC, DNS, SMTP, SMB, SQL, SSH.                                                     |                     |
| 6          |                                                 | Encrypted Traffic Analytics: JA3/JA3S, SNI/cert telemetry and flow analytics without mandatory TLS decryption.                                                                                        |                     |
| 7          |                                                 | Threat Intel & Updates: Automatic signature/intel updates; STIX/TAXII support; air-gapped update option; update caching on-prem.                                                                      |                     |
| 8          |                                                 | ICS/OT/IoT Awareness: Protocol decoders for Modbus, DNP3, BACnet, MQTT, CoAP where applicable.                                                                                                        |                     |
| 9          |                                                 | Analytics & Triage: Risk scoring, ATT&CK mapping, campaign grouping, deduplication/suppression, custom correlation, incident timelines.                                                               |                     |
| 10         |                                                 | Forensics: PCAP extraction with configurable retention; chain-of-custody metadata; case evidence packaging for CERT-In reporting.                                                                     |                     |
| 11         |                                                 | Logging & Retention: Store security logs >=180 days locally; export to SIEM via syslog/CEF/LEEF/JSON with hashing.                                                                                    |                     |
| 12         |                                                 | Time Synchronization: All components sync with NIC/NPL or traceable NTP servers; drift alerts.                                                                                                        |                     |

| SNo. | Parameter                                                 | Specifications                                                                                                                                                                                                                                                                                                                                    | Compliance (Yes/No) |
|------|-----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 13   |                                                           | Performance (per sensor): Sustained IDS throughput >=5 Gbps; >=100k new flows/sec; >=2M concurrent flows; >=3 Mpps; PCAP buffer >=2 TB.                                                                                                                                                                                                           |                     |
| 14   |                                                           | High Availability: Manager and sensors support HA/cluster; rolling upgrades; health monitoring (SNMP/REST).                                                                                                                                                                                                                                       |                     |
| 15   |                                                           | Security of Platform: Hardened OS, secure boot, signed updates, FIPS-validated crypto or equivalent; no default/hidden accounts; mutual TLS for mgmt.                                                                                                                                                                                             |                     |
| 16   |                                                           | Access Control: Granular RBAC (viewer/analyst/incident-manager/admin), MFA, JIT access, dual-control for destructive actions.                                                                                                                                                                                                                     |                     |
| 17   |                                                           | Integrations: SIEM/SOAR/ticketing via REST/syslog/TAXII; CERT-In/NIC-CERT incident export templates; NTP evidence in reports.                                                                                                                                                                                                                     |                     |
| 18   |                                                           | Reporting: CERT-In 6-hour incident templates; monthly SOC posture reports; log-retention attestations.                                                                                                                                                                                                                                            |                     |
| 19   |                                                           | Manageability: Backup/restore of policies/signatures/cases; DR runbooks; multi-tenant segregation for multi-dept operations.                                                                                                                                                                                                                      |                     |
| 20   |                                                           | QoS/Resilience Context: DNS abuse/BGP anomaly monitoring hooks and dashboards (read-only analytics) for resilience posture.                                                                                                                                                                                                                       |                     |
| 23   |                                                           | Warranty & Support: 5-year comprehensive OEM warranty with signature/content updates; TAC L3 support in India.                                                                                                                                                                                                                                    |                     |
| 27   |                                                           | Data Governance: All logs/PCAP/telemetry stored/processed within India; cloud components (if any) must support audit & data residency.                                                                                                                                                                                                            |                     |
| 43.  | <b>Security Information &amp; Event Management (SIEM)</b> |                                                                                                                                                                                                                                                                                                                                                   |                     |
| 1    |                                                           | The Next generation SIEM should encompass logs, packet, user and end point data in single platform with added context and threat Intelligence Should provide complete network forensics and visibility through deep packet inspection high speed packet capture and analysis. SIEM for Logs and deep packet inspection should be from Single OEM. |                     |
| 2    |                                                           | The solution should be able to collect raw logs in real-time to a Central log database from any IP                                                                                                                                                                                                                                                |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Compliance (Yes/No) |
|------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | <p>Device (existing/proposed) including but not limited to:</p> <ul style="list-style-type: none"> <li>• Networking devices (Router/switches etc.)</li> <li>• Security devices (IDS/IPS, Anti- Virus/HIPS, Patch Management, Firewall/DB Security solutions etc.)</li> <li>• Operating systems (Linux/Windows/SOLARIS OS etc.)</li> <li>• Enterprise Platforms (Servers, Storage, Database etc.)</li> <li>• Logs from All City Networks devices and sensors to identify malicious traffic using standard Protocols.</li> </ul>                                                                                                   |                     |
| 3    |           | <p>The solution should be able to collect the logs in an agent/ agent less manner and store the same to a Central log database from any IP Device. The raw logs should be time stamped, compressed to optimize storage utilization. The solution should be able to perform Real time monitoring of log data and perform Network traffic analysis to identify threats. Should be able to monitor traffic from L2 to L7 layer metrics conversations in the network and share the network data (Packet + Meta data) to generate alerts as they happen in real time by using single correlation and detection rules within SIEM.</p> |                     |
| 4    |           | <p>The solution should collect the entire log sent by the devices by guaranteeing chain of custody for regulatory compliance should provide pre-defined report templates. The reports should also provide reports out of the box such as PCI- DSS, HIPAA, SOX, NERC, FISMA, ISO, GLBA, GPG13.</p>                                                                                                                                                                                                                                                                                                                                |                     |
| 5    |           | <p>The SIEM &amp; Log Monitoring solution should be from a different OEM than the Prevention Security solutions like F/W, IPS, HIPS, AV, DLP, EMS, FIM, APN, NPM and Encryption.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
| 6    |           | <p>The solution must have three-tiered architecture with physical segregation of duties between them. Collectors to collect and forward, Logger to retain raw and normalized logs for forensics, audit and compliance and forward to correlation which should do real time correlation and must be able to handle twice the peak EPS and 3 times the Burst</p>                                                                                                                                                                                                                                                                   |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Compliance (Yes/No) |
|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | <p>EPS without queuing or dropping logs. All three tiers/components (Collection, Correlation and Management) should be sized and licensed for same amount of EPS count.</p> <p>Platform must be on VM's or physical servers.</p> <p>Solution must be Sized for 10,000 Sustained EPS considering event size of 500 bytes or 400 GB per day and all the infrastructure including Total storage (Min 150 TB from day 1) should be considered on the above parameters without any assumptions. Solution should support online log management with up to 6 months of log retention.</p> |                     |
| 7    |           | SIEM solution should have provision for parser creation for unsupported / home grown applications. The solution should also support API integration with other proposed devices.                                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| 8    |           | SIEM solution should be able to receive and consume global threat feeds automatically and manually.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                     |
| 9    |           | The Solution should detect common events like D-DOS / DOS, Scanning, Worms, Unexpected application services. (e.g., tunnelled protocols, backdoors, use of forbidden application Protocols), Policy violations, etc. The solution should profile traffic by TCP and UDP Port.                                                                                                                                                                                                                                                                                                      |                     |
| 10   |           | The proposed system should encrypt the logs or the channel of logs transmission before sending to the correlation engine. The System should also compress the logs before transmission to the log correlation engine.                                                                                                                                                                                                                                                                                                                                                              |                     |
| 11   |           | Should be able to provide complete packet-by-packet details pertaining to one or more session of interest including Session replay, page reconstruction, image views, artefact & raw packet and object extractions.                                                                                                                                                                                                                                                                                                                                                                |                     |
| 12   |           | The SIEM solution should provide correlation against data collected from multiple devices across the network. There should be no limitation or license should not be based on number of devices to be supported. Any addition in no. of devices should have no cost impact on department.                                                                                                                                                                                                                                                                                          |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Compliance (Yes/No) |
|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 13   |           | The SIEM solution should be capable to obtain security logs from different sources and integrate the logs for correlation and analysis.                                                                                                                                                                                                                                                                                                                                                          |                     |
| 14   |           | Should have a minimum predefined set of rules to monitor the complete file system must be able to whitelist files that may have suspicious behaviours but are in fact legitimate                                                                                                                                                                                                                                                                                                                 |                     |
| 15   |           | The solution should have ability to detect high privilege access anomaly detection for misuse, sharing, or takeover. Uses behavioural analysis to identify any anomalous activity that falls outside of the user normal pattern of life. Unusual Credential use - models the times and devices normally used by each username, and alerts when there is an unusual combination                                                                                                                   |                     |
| 16   |           | The product must provide the ability to schedule reports to run hourly, daily, weekly or monthly. There must be numerous output formats and delivery options for scheduled reports.                                                                                                                                                                                                                                                                                                              |                     |
| 17   |           | Solution must collect log from all log-generating devices including application and it must not have limitation in number of devices it will collect logs from.                                                                                                                                                                                                                                                                                                                                  |                     |
| 18   |           | Solution must secure logs at source itself by identification of logs using a stateless (no key management) architecture of format preserving encryption. The solution should display the type of data being transported via HTTP into and out of the network (i.e. text, image, video etc.), The solution should support session reconstruction and object extractions from sessions. It should have ability to recover files which are in the payload of network traffic such as PDF, exe, etc. |                     |
| 19   |           | The solution must provide value in assisting in adhering to audit requirements, alerting of non-compliance and providing necessary reports that can be used during an audit.                                                                                                                                                                                                                                                                                                                     |                     |
| 20   |           | The solution must be capable of detecting attacks in real-time through advance correlation using single rule for logs and packets to pivot on the exact payload for reconstruction and generate digital evidence .The central correlation engine database                                                                                                                                                                                                                                        |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Compliance (Yes/No) |
|------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | should be updated with real time security intelligence updates provided by the SIEM OEM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| 21   |           | The solution must be able to detect malicious payload in network traffic. Detect and reconstruct files back to its original type. Detect hidden or embedded files. Detect and flag out renamed files                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                     |
| 22   |           | <p>The proposed solution must be able to provide the complete platform to perform Network forensics solution. Solution should create indexes for payload objects and not just rely on header information should have out of the Box Packet Parsers for identification and analysis of protocols and other header metrics.</p> <p>The solution should provide network traffic insight by</p> <ol style="list-style-type: none"> <li>Classifying protocols and applications</li> <li>Reconstructed file such as a Word document, image, Web page, VOIP and system files</li> <li>Deep-packet inspection</li> <li>Cross correlation for Analysis &amp; Aggregation</li> <li>Reconstruct sessions and analyze artifacts</li> <li>Preview artifacts and attachments</li> </ol> |                     |
| 23   |           | Network traffic inspection to detect suspicious activities such as different malware family used by Threat Actor groups, TTPs used for malicious activities and lateral movements or The solution should detect and respond to threats based on MITRE ATT&CK tactics and techniques and report the appropriate MITRE ATT&CK tactic and /or technique in the platform user interface, provide support for STIX/TAXII integrations.                                                                                                                                                                                                                                                                                                                                         |                     |
| 24   |           | The logger layer must have storage to store online logs and must be capable of providing dashboards like failed logins, bandwidth talkers, late or early login etc. Should provide RBAC to generate dashboard for different stakeholders                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| 25   |           | Support disaster recovery setup with warm / hot back up for Console, Correlation and Collection with ready to function state at any given time and system should display number of use cases deployed mapped which would provide a view on security posture.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                     |



| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Compliance (Yes/No) |
|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 26   |           | Provides the following but not limited to real time alerting based on observed security threats: DDoS, Worm outbreak, Botnets, Exploitation and attack attempts, Attack sources vis-à-vis specific attacks and top exploits, compromised systems, Unexpected application services (e.g., tunnelled protocols, backdoors, use of forbidden application Protocols), attack vectors such as the following are detected, Web Login brute force attempts, Should provide complete network visibility through deep packet inspection through high speed packet capture and analysis. |                     |
| 27   |           | The solution should be software based SIEM with hardened OS, database platform. Collection, Co-relation and Console layer should be physically and logical separate.                                                                                                                                                                                                                                                                                                                                                                                                           |                     |
| 28   |           | Raw and normalized Logs should be handled and stored in tamper proof way across SIEM solution. Alter/modify tamper rights w.r.t Raw logs. SIEM should support syslog over TLS to ensure that logs can be transported in a confidential manner.                                                                                                                                                                                                                                                                                                                                 |                     |
| 29   |           | The solution must provide a complete audit trail and accountability during the incident handling for forensic investigations. The system should have ability to perform event forensics to determine what really happened before, during, and after the event.                                                                                                                                                                                                                                                                                                                 |                     |
| 30   |           | SIEM should have the ability to natively collect logs from logstash.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                     |
| 31   |           | Search Performance – Structured Data: The proposed solution search performance must be capable of searching through millions of structured (indexed) events                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |
| 32   |           | The proposed solution must provide a common Content Editor to create or modify resources within the system. All aspects of this editor must apply to the development of rules, reports, dashboards and any other resource that will be created in the system.                                                                                                                                                                                                                                                                                                                  |                     |
| 33   |           | Solution should use self-learning behavioural analysis to dynamically model each user,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                      | Compliance (Yes/No) |
|------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | probabilistically identifying any anomalous activity that falls outside of the user normal pattern of life.                                                                                                                                                                                                                                         |                     |
| 34   |           | Solution should be focused on unsupervised machine learning so that it does not require any human/analyst to create data science models. Solution should support Machine Learning (ML) driven risk scores and risk profiles for user                                                                                                                |                     |
| 35   |           | To avoid generating too many false positives, solution must support deploying correlation rules in test mode to test the rules thoroughly before deploying in production mode. The solution should allow a wizard-based interface for rule creation. The solution should support logical operations and nested rules for creation of complex rules. |                     |
| 36   |           | The solution should have the capability to send notification messages and alerts through email, Syslog and Scripts, etc.                                                                                                                                                                                                                            |                     |
| 37   |           | Solution should support Machine Learning (ML) driven risk scores and risk profiles for user                                                                                                                                                                                                                                                         |                     |
| 38   |           | SIEM UEBA solution should not be app based or plugin based and should be dedicated machine learning engine running on appliance                                                                                                                                                                                                                     |                     |
| 39   |           | UEBA in built in SIEM should be a pure unsupervised machine learning engine with no need to configure any settings not limited to baselines, thresholds, decays, risks scores. Also, there should not be any need to configure thresholds through settings during learning or production phase                                                      |                     |
| 40   |           | Quoted SIEM Solution must have its presence in India for more than 10 years OEM of the SIEM must have at least 3 deployments of more than 20000 Sustained EPS in Government of India organization. Relevant documents for the same to be provided along with technical bid.                                                                         |                     |

#### Group 7: ICCC and Control Center Infrastructure

| SNo. | Parameter                                           | Specifications | Compliance (Yes/No) |
|------|-----------------------------------------------------|----------------|---------------------|
| 44.  | Integrated Command & Control Center (ICCC) Platform |                |                     |

| SNo. | Parameter                           | Specifications                                                                                                                                                                                                                                                                                | Compliance (Yes/No) |
|------|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 1    | Solution & Platform                 | The Command & Control solution should be implemented and complied to the industry open standards based Commercial-of- the-shelf (COTS) products.                                                                                                                                              |                     |
| 2    |                                     | The Command & Control solution should be Microservice based & support containerization of services.                                                                                                                                                                                           |                     |
| 3    |                                     | The Command & Control solution should be Cloud ready and has to be Cloud Agnostic.                                                                                                                                                                                                            |                     |
| 4    |                                     | System shall have capability to host on On-premise and Cloud Data Centre.                                                                                                                                                                                                                     |                     |
| 5    |                                     | System must have load balancing and high availability to meet SLA.                                                                                                                                                                                                                            |                     |
| 6    |                                     | System must provide a comprehensive and industry accredited Unified Open Standard API (Application Program Interface) or SDK (Software Development's Kit) to allow interfacing and integration with existing systems, and future application and sensors which will be deployed on the field. |                     |
| 7    |                                     | System shall have capability to support future integration with department's future initiatives                                                                                                                                                                                               |                     |
| 8    |                                     | System should support Interoperability and Portability (replicable).<br>System shall be able to integrate with any type of sensor platform or vertical solutions being used for the smart services irrespective of the technology used.                                                       |                     |
| 9    |                                     | Solution should not be dependent on proprietary hardware.                                                                                                                                                                                                                                     |                     |
| 10   |                                     | System shall be able to normalize the data coming from different devices of same type or different data sources and should support Common Standard Open Data Models for data normalization (i.e. Different VMS from different OEMs, etc.) and display unified view of alerts                  |                     |
| 11   | Command & Control Center Components | Web / Client server to manage client requests.<br>Client should provide web-based access to dashboards, one-stop portals / GUI to event information, overall status, and details.                                                                                                             |                     |
| 12   |                                     | ICCC, through its integration with various smart devices and smart applications, will act as a Decision Support System for city administration to                                                                                                                                             |                     |

| SNo. | Parameter           | Specifications                                                                                                                                                                                                                                 | Compliance (Yes/No) |
|------|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                     | respond to the real time events by consuming data feeds from different data sources and by processing information out of these data sets                                                                                                       |                     |
| 13   |                     | The system should provide language support for both Hindi and English language on the user interface. The user should have the option to select either of the 2 languages                                                                      |                     |
| 14   |                     | Mobility: should enable app-based access to monitor alerts, and SOPs to mobile users.                                                                                                                                                          |                     |
| 15   |                     | Security & Roles – should manage roles definition for internal as well as external access                                                                                                                                                      |                     |
| 16   |                     | Centralized data storage for operational data : Should provide facility for centralized storage of operational data                                                                                                                            |                     |
| 17   | Incident Management | Should have an ability to display alarm condition through visual display and audible tone                                                                                                                                                      |                     |
| 18   |                     | Should have an ability to simultaneously handle multiple alarms from multiple workstations                                                                                                                                                     |                     |
| 19   |                     | Should have an ability to sort alerts/Incident according to different configurable columns                                                                                                                                                     |                     |
| 20   |                     | Should have an ability to automatically prioritize and display multiple alarms and status conditions according to pre- defined parameters such as alarm type, location, sensor, severity, etc.                                                 |                     |
| 21   |                     | Should display the highest priority alarm and associated data / video in the queue as default, regardless of the arrival sequence                                                                                                              |                     |
| 22   |                     | Should support comprehensive reporting on event status in real time manually or automatically by a sensor, CCTV video feeds, any other sensor.                                                                                                 |                     |
| 23   |                     | Should support for sudden critical events and linkage to standard operating procedures automatically without human intervention. Operator should be able to associate pre-defined forms and attachments while handling an Incident in runtime. |                     |
| 24   |                     | Should have an ability to export alarm report in various formats including pdf, jpeg, html, txt formats                                                                                                                                        |                     |
| 25   |                     | Should support for multiple incidents with both segregated and/or overlapping management and response teams.                                                                                                                                   |                     |

| SNo. | Parameter     | Specifications                                                                                                                                                                                                         | Compliance (Yes/No) |
|------|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 26   |               | Should support Geospatial rendering of event and incident information.                                                                                                                                                 |                     |
| 27   |               | Should support plotting of area of impact using polynomial lines to divide the area into multiple zones on the GIS maps.                                                                                               |                     |
| 28   |               | Should support incorporation of resource database for operation and mobilizing the field resources for response. Resources may be assigned and mobilized as per the defined Standard Operating Procedure in the system |                     |
| 29   | GIS Display   | Shall view the environment through geospatial map and shall support OGC WMS standard.                                                                                                                                  |                     |
| 30   |               | Shall allow user to view sensor and related name from the displayed map.                                                                                                                                               |                     |
| 31   |               | Shall allow all resources, objects, sensors and elements on the map to be georeferenced such that they have a real-world coordinate.                                                                                   |                     |
| 32   |               | Shall visually display a camera sensor and icons for different category of cameras.                                                                                                                                    |                     |
| 33   |               | Shall visually display an alarming sensor on map.                                                                                                                                                                      |                     |
| 34   |               | Shall visually differentiate sensor alarm on map through color and icon identifiers                                                                                                                                    |                     |
| 35   |               | Shall allow user to choose camera and take live video image snapshot and save to file from any camera                                                                                                                  |                     |
| 36   |               | Shall allow user to choose camera from map to move PTZ cameras                                                                                                                                                         |                     |
| 37   |               | Shall allow user to choose camera to play, pause, stop, fast-forward, rewind, and play recorded video from preset time                                                                                                 |                     |
| 38   | Video Display | Shall view live or recorded video from CCTV Camera / VMS                                                                                                                                                               |                     |
| 39   |               | Shall display video in 1x1, 2x2, 3x3 and 4x4 window formats                                                                                                                                                            |                     |
| 40   |               | Shall enable operator to specify video windows to be displayed in matrix                                                                                                                                               |                     |
| 41   |               | Shall view either live or recorded video can be displayed in the video matrix window.                                                                                                                                  |                     |
| 42   |               | Shall enable matrix settings to be saved per user                                                                                                                                                                      |                     |
| 43   |               | Shall play, fast-forward, rewind, pause, and specify time to play recorded video                                                                                                                                       |                     |

| SNo. | Parameter                            | Specifications                                                                                                                                                                                                  | Compliance (Yes/No) |
|------|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 44   |                                      | Shall take a video still image (snapshot) from live or recorded video                                                                                                                                           |                     |
| 45   |                                      | Shall have the capability to move PTZ cameras                                                                                                                                                                   |                     |
| 46   |                                      | Shall enable video snapshot to be taken and saved from any windowpane in the matrix view                                                                                                                        |                     |
| 47   |                                      | Shall rotate through multiple video views based on predefined video camera sequence and duration.                                                                                                               |                     |
| 48   |                                      | Shall enable user to only view and control video for which they have been assigned permissions by the administrator                                                                                             |                     |
| 49   | Standard Operations Procedures (SOP) | Command & Control Center should provide for defining un-limited number of configurable and customizable standard operating procedures through graphical, easy to use interface.                                 |                     |
| 50   |                                      | Standard Operating Procedures should be established, approved sets of actions considered to be the best practices for responding to a situation or carrying out an operation.                                   |                     |
| 51   |                                      | The users should be able to edit the SOP, including adding, editing, or deleting the activities.                                                                                                                |                     |
| 52   |                                      | In run time, users shall be able to modify tasks statuses on the list. They should be able to complete tasks, cancel them and mark them as 'in progress'. Completing a task shall be as easy as checking a box. |                     |
| 53   |                                      | The users should be able to also add comments to or stop the SOP (prior to completion).                                                                                                                         |                     |
| 54   |                                      | There should be provision for automatically logging the actions, changes, and commentary for the SOP and its activities, so that an electronic record is available for after- action review.                    |                     |
| 55   |                                      | The system will support post incident analysis through different reports generated that will enable the authorities to find gap/deficiency in the incident handling and help improve and/or rewrite SOPs        |                     |
| 56   |                                      | The SOP Tool should have capability to define the following activity types:                                                                                                                                     |                     |
| 57   |                                      | Manual Activity - An activity that is done manually by the owner and provide details in the description field.                                                                                                  |                     |

| SNo. | Parameter                             | Specifications                                                                                                                                                                                    | Compliance (Yes/No) |
|------|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 58   |                                       | Automation Activity - An activity that initiates and tracks a particular work order and select a predefined work order from the list.                                                             |                     |
| 59   |                                       | If-Then-Else Activity - A conditional activity that allows branching based on specific criteria. Either enter or select values for Then and Else.                                                 |                     |
| 60   |                                       | Notification Activity - An activity that displays a notification window that contains an email template for the activity owner to complete and then sends an email notification.                  |                     |
| 61   | Field Mobile User                     | The ICCC shall support mobile apps support for Android smartphones and tablets. The mobile apps shall communicate with the Mobile Server of the DC over any WiFi or mobile GPRS/3G/4G connection. |                     |
| 62   |                                       | Mobile apps shall communicate with the ICCC via a Mobile. Communication between the mobile device and the Mobile Server shall support encryptions.                                                |                     |
| 63   |                                       | Mobile User shall receive the alert from Operator to address the incident on field                                                                                                                |                     |
| 64   |                                       | Mobile user shall provide function to update the status of alert, share input via message and close alert activities are completed                                                                |                     |
|      |                                       | Mobile user shall be allowed to create emergency situation alert via SOS button                                                                                                                   |                     |
| 65   |                                       | Mobile app allows user to Upload Attachment directly through camera & user should be able to View/Remove attachment before uploading                                                              |                     |
| 66   | Health Monitoring                     | Should provide icon-based user interface on the GIS map to report non-functional device.                                                                                                          |                     |
| 67   |                                       | Should also provide a single tabular view to list all devices along with their availability status in real time.                                                                                  |                     |
| 68   |                                       | The ICCC shall monitor the health of the system, log health related events, and calculate statistics like uptime, downtime.                                                                       |                     |
| 69   | Dashboard & Key Performance Indicator | Real time dashboard on the situational view should provide information about security information so that officials have better understanding of what is happening on the ground.                 |                     |
| 70   |                                       | Should provide dashboard filtering capabilities that enable end-users to dynamically filter the data in                                                                                           |                     |

| SNo. | Parameter                      | Specifications                                                                                                                                                                                                                                 | Compliance (Yes/No) |
|------|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                | their dashboard based upon criteria, such as region, dates, product, brands, etc. and capability to drill down to the details                                                                                                                  |                     |
| 71   |                                | Command & Control Center should be able to facilitate measurement or criteria based on performance policies against defined SLAs                                                                                                               |                     |
| 72   |                                | Green indicates that the status is acceptable, based on the parameters for that KPI, no action is required.                                                                                                                                    |                     |
| 73   |                                | Yellow indicates that caution or monitoring is required, action may be required.                                                                                                                                                               |                     |
| 74   |                                | Red indicates that the status is critical and action is recommended.                                                                                                                                                                           |                     |
| 75   | Reporting Requirement          | The system should provide Informative and aesthetic dashboards providing simple clicks and friendly visualization                                                                                                                              |                     |
| 76   |                                | The solution should generate reports of alerts/incidents based on the area, sensor type or periodic or any other customer reports as per choice of the administrators                                                                          |                     |
| 77   |                                | The reports generated can be scheduled to specific stakeholders on daily, weekly or any custom basis without manual intervention                                                                                                               |                     |
| 78   | Collaboration Tools            | The CCC platform should have the capability to bring in multiple stake holders automatically into a common collaboration platform for ex: persistent chat rooms in response to a SOP defined to handle a particular event.                     |                     |
| 79   | Authentication                 | Use authentication information to authenticate individuals and/or assign roles.                                                                                                                                                                |                     |
| 80   |                                | Support LDAP authentication mechanism.                                                                                                                                                                                                         |                     |
| 81   | Authorization & Access Control | Comprehensive policy-based security administration to provide all users specific access based on user's responsibilities for relevant web components. Maintenance of authorization policy in a central repository for administration purposes. |                     |
| 82   |                                | Should support to enable assignment of permissions to groups, and administration of access control across multiple applications and resources. Secure administration tools to manage users, groups, permissions and policies.                  |                     |



| SNo.       | Parameter                                 | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                              | Compliance (Yes/No) |
|------------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 83         | Multi-Level Access Control & Management   | User will be defined with Geography boundary to load the relevant sensors and alerts                                                                                                                                                                                                                                                                                                                                                                        |                     |
| 84         |                                           | Escalation of alerts to next level if not addressed in defined time limit                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| 85         |                                           | Central monitoring will have complete visibility of alerts and provide guidance to field operation team                                                                                                                                                                                                                                                                                                                                                     |                     |
| 86         | Administration Activities                 | The Configuration UI application shall allow the administrator or users with appropriate privileges to change the system configuration.                                                                                                                                                                                                                                                                                                                     |                     |
| 87         |                                           | The Configuration UI shall have a home page with single-click access to various tasks.                                                                                                                                                                                                                                                                                                                                                                      |                     |
| 88         |                                           | <p>The Integrated UI shall provide links to facilitate the following functions:</p> <ul style="list-style-type: none"> <li>• Configure Site hierarchy (multi-level support expected)</li> <li>• Configure the Sensor systems (like VMS, FRS, PAS, ...)</li> <li>• Configure Users, Roles and Permissions</li> <li>• Configure Alert &amp; related categories</li> <li>• Configure business rules and escalation rule</li> </ul>                             |                     |
| 89         | Event correlation                         | Command & Control Centre should be able to correlate two or more events coming from different subsystems (incoming sensors) based on time, place, custom attribute and provide correlation notifications to the operators based on predefined business and operational rules in the configurable and customizable rule engine.                                                                                                                              |                     |
| 90         | Flexible single sign-on (SSO)             | Support LDAP authentication mechanism                                                                                                                                                                                                                                                                                                                                                                                                                       |                     |
| <b>45.</b> | <b>Enterprise Management System (EMS)</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
| 1          |                                           | NMS shall be able to monitor and configure asked switches, router and wireless access points (should be proposed against the proposed devices) and should have scalability to manage up to 5000 devices in future. NMS shall be able to manage both wired and wireless networks in single pane of glass management. APM can be provided by same EMS OEM or it can be an integrated solution from other OEM. Rest all the modules should be from single OEM. |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                  | Compliance (Yes/No) |
|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 2    |           | NMS should be scalable to provide deep application visibility using AVC, NetFlow/Sflow,NBAR or packet inspection to recognize a wide variety of applications and SNMP.NMS should be able to provide Network topology.                                                                                                                           |                     |
| 3    |           | The proposed EMS OEM must have at least 2 deployment (in state/central Government/ PSU/BFSI) in India with 10,000 core network devices such as router, switch, firewall being monitored and their configuration is also managed in this deployment in last five years. Reference PO copy and completion/ signoff document need to be submitted. |                     |
|      |           | The solution should be capable of running in Linux platform with time series database (not RDBMS) as backend and should be 64-bit application to fully utilize the server resources on which it is installed.                                                                                                                                   |                     |
|      |           | The organization should have ISO 45001, ISO 55000, ISO 270001, ISO 27034, SOC3 and CMMI Level 3 certification for their internal processes and certificate must be provided.                                                                                                                                                                    |                     |
|      |           | Proposed solution should be CIS certified and certificate must be provided.                                                                                                                                                                                                                                                                     |                     |
|      |           | Proposed solution should have IPR/copyright registered in India. Copyright certificate to be submitted.                                                                                                                                                                                                                                         |                     |
|      |           | Proposed solution should be ITIL v4 complied for 9 processes from Peoplecert.                                                                                                                                                                                                                                                                   |                     |
| 4    |           | Should provide a customizable at-a-glance summary of all discovered devices and existing network switches to proactively identify problem areas and help prevent network downtime. The network has to be manageable at Network Operations Center(NOC) and through secured browser.                                                              |                     |
| 5    |           | Should be able to discover, configure, monitor, manage, and deploy configurations todynamically update groups of devices.                                                                                                                                                                                                                       |                     |
| 6    |           | Should allow flexible definitions of administrator roles and responsibilities with RBAC(Role based Access Control) for different teams.                                                                                                                                                                                                         |                     |

| SNo. | Parameter                                    | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                | Compliance (Yes/No) |
|------|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 7    |                                              | Should enable performance management by providing customizable dashboards and historical data visibility.                                                                                                                                                                                                                                                                                                                     |                     |
| 8    |                                              | Should be able to generate reports designed to summarize utilization of and traffic pattern on network interfaces.                                                                                                                                                                                                                                                                                                            |                     |
| 9    |                                              | Tool should provide option for the users to choose personalized GUI Color theme (Multi-Color, Dark/Light Theme), It should have Multi-Language Support so every state user can use system with in their own language. Multiple Logo supports based on the user state, system should load their state default logo. System should support Key board shortcuts to navigate through different modules and perform faster actions |                     |
| 10   |                                              | Should have direct OEM 24x7x365 TAC support and hardware replacement warranty for 5Years.                                                                                                                                                                                                                                                                                                                                     |                     |
|      | Enterprise management System (EMS) - General |                                                                                                                                                                                                                                                                                                                                                                                                                               |                     |
| 11   |                                              | Enterprise Management System should provide for end to end performance, availability, fault and event and impact management for all enterprise resources that encompasses the heterogeneous networks, systems, applications, databases and client infrastructure present in the enterprise                                                                                                                                    |                     |
| 12   |                                              | The EMS shall be able to support the proposed hardware and software Components (IT and Non-IT) deployed. The software shall be capable of providing early warning signals on the performance issues, and future infrastructure capacity augmentation. The EMS shall also support single pane / dashboard with visibility across multiple areas of applications for monitoring                                                 |                     |
| 13   |                                              | <p>Following functionalities are essential and required from such EMS tools:</p> <ul style="list-style-type: none"> <li>• Availability Monitoring, Management and Reporting</li> <li>• Performance Monitoring, Management and Reporting</li> <li>• Helpdesk Monitoring, Management and Reporting</li> <li>• Asset Management</li> </ul>                                                                                       |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                   | Compliance (Yes/No) |
|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | <ul style="list-style-type: none"> <li>Incident Management and RCA reporting Change and Configuration management</li> </ul>                                                                                                                                                                      |                     |
| 14   |           | The Service Management solution to be used for incident and problem management, Inventory& Asset management, Service Request Management, Self Service, Service level management should be built to leverage the same common Configuration Management Database (CMDB) with a unified architecture |                     |
| 15   |           | The tool should have Integrated Web based feature to build Network Diagram, No separate client window to configure network Diagram. The builder should be similar to MS Visio with all pre-loaded shapes and icons.                                                                              |                     |
| 16   |           | Solution should provide for future scalability of the whole system without major architectural changes                                                                                                                                                                                           |                     |
| 17   |           | Solution should be distributed, and scalable and open to third party integration                                                                                                                                                                                                                 |                     |
| 18   |           | The solution should be able to monitor all the IT assets for the organization across all the location spread across including servers, network, routers, switches etc.                                                                                                                           |                     |
| 19   |           | The agent and agentless monitor should be able to collect & manage event/ fault, performance and capacity data and should not require separate collectors                                                                                                                                        |                     |
| 20   |           | The solution should reduce manual customization efforts and should speed-up problem identification and resolution of the IT performance anomalies with intelligent events                                                                                                                        |                     |
| 21   |           | Solution should carry out probable cause analysis thereby helping operators to identify the root cause without having to write complex rules for correlation                                                                                                                                     |                     |
| 22   |           | Should be configurable to suppress events for key systems/ devices that are down for routine maintenance or planned outage                                                                                                                                                                       |                     |
| 23   |           | The solution should provide the mechanism for creation of knowledgebase and provision the same to the end users with the ability to search for known errors from the knowledge base                                                                                                              |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                       | Compliance (Yes/No) |
|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 24   |           | The solution should provide network, server, application and database performance information and alarms and should be able to show it in a single console and provide a reporting interface for all network and system components                                                                                                   |                     |
| 25   |           | The solution should be extensible enough to support capacity planning and optimization with data collected through the deployed performance management agent or from agentless data collectors                                                                                                                                       |                     |
| 26   |           | Database Monitoring: The solution should be able to monitor all the market leading database solution providers                                                                                                                                                                                                                       |                     |
| 27   |           | The Database monitoring should seamlessly integrate with the same EMS dashboard/ Portal and provide integration with the central event console                                                                                                                                                                                       |                     |
| 28   |           | The tool should provide the organization the ability to easily collect and analyse specific information of applications & databases                                                                                                                                                                                                  |                     |
| 29   |           | The solution should manage service levels for delivery and support of business services                                                                                                                                                                                                                                              |                     |
| 30   |           | Ability to create custom KPI metrics and scorecard/compliance reports that are updated automatically                                                                                                                                                                                                                                 |                     |
| 31   |           | Single dashboard provides the as-is scenario by consolidating the data across the organization                                                                                                                                                                                                                                       |                     |
| 32   |           | Should support top down dashboards with drill down capabilities into detailed information                                                                                                                                                                                                                                            |                     |
| 33   |           | Should support comprehensive and configuration-level roll-back for changes                                                                                                                                                                                                                                                           |                     |
| 34   |           | Should support Configuration-level Control of Tasks, Objects, and Policies                                                                                                                                                                                                                                                           |                     |
| 36   |           | The configuration changes to be done on target network devices must follow an approval-based system wherein changes can be performed only after required approvals are passed. Tool must have in-built approval mechanism along with option to integrate with Change Management module of other ITSM tools for the approval process. |                     |
| 37   |           | Tool must provide an option for taking remote access via Telnet / SSH to target CLI- based Network Devices with an option to record all sessions to                                                                                                                                                                                  |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Compliance (Yes/No) |
|------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | capture all commands being executed on the remote devices. The tool must allow session relay wherein a higher-privileged user can view the ongoing CLI session of a lower-privileged user in real-time from the tool GUI. The sessions should be saved for historical analysis with flexible filter options like searching for sessions in which a particular command has been executed.                                                                                                                                                                 |                     |
| 38   |           | It should automatically trends and provides dynamic performance baselines for applications and services                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| 39   |           | It should proactively identify errors affecting end-users, instead of waiting for a call from an employee or an incident being raised                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |
| 40   |           | It should provide comprehensive view of application performance from the end- user perspective; it should distinguish between broad and targeted slow-downs, allowing drill- down into                                                                                                                                                                                                                                                                                                                                                                   |                     |
| 41   |           | Solution should provide DDoS reports in real time within 1 minute after detection of attack with details of IP, Ports, ASN numbers, Router Interfaces, Customers facing the attacks                                                                                                                                                                                                                                                                                                                                                                      |                     |
| 42   |           | It should use real end user performance as one of the feed for more accurate root cause analysis and automated repair of business service performance issues                                                                                                                                                                                                                                                                                                                                                                                             |                     |
|      | Technical |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                     |
| 43   |           | <p>Application monitoring parameters:</p> <ul style="list-style-type: none"> <li>• Database Monitoring Attributes</li> <li>• User Connections (#)</li> <li>• Transaction Count</li> <li>• Log Space Available</li> <li>• Deadlocks/ sec</li> <li>• Database Free Space (%)</li> <li>• Database Used Space (MB)</li> <li>• Disk Reads (per sec)</li> <li>• Disk Writes (per sec)</li> <li>• Cache hit ratio</li> <li>• Lock Memory</li> <li>• Average Wait Time (per table)</li> <li>• Buffer Cache Hit Ratio (%)</li> <li>• Commits (per sec)</li> </ul> |                     |

| SNo. | Parameter                                                      | Specifications                                                                                                                                                                                                                                                                                                                                          | Compliance (Yes/No) |
|------|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                                                | <ul style="list-style-type: none"> <li>Memory Used (MB)</li> <li>Percent Memory Used (%)</li> <li>Availability (%)</li> <li>Commits (per sec)</li> <li>Percent Memory Used (%)</li> <li>Buffer Cache Hit Ratio (%)</li> <li>Active Instances (#)</li> </ul>                                                                                             |                     |
| 44   |                                                                | The proposed system shall support multiple types of discovery like IP range discovery including built-in support for IPv6, Seed router based discovery and discovery whenever new devices are added with capability to exclude specific devices                                                                                                         |                     |
| 45   |                                                                | Web Server Monitors but not limited to: <ul style="list-style-type: none"> <li>Post Requests (per sec)</li> <li>Get Requests (per sec)</li> <li>Errors (per sec)</li> <li>Client-Side Errors (per sec)</li> </ul>                                                                                                                                       |                     |
|      |                                                                | Server-Side Errors (per sec) Percent Busy Connections (%)                                                                                                                                                                                                                                                                                               |                     |
| 46   |                                                                | Solution should support comprehensive SLA management platform that cuts across Infrastructure Management and Service Management. For e.g. monitors and reports across different parameters like CPU utilization, disk space, response times, resolution times (e.g. incident closed on 2 hours) performance and custom parameters of an enterprise etc. |                     |
| 47   |                                                                | The solution should have a consolidated, automated graphical report for SLA compliance with ability to drill down to reason for non-compliance                                                                                                                                                                                                          |                     |
|      | Discovery, Configuration and Faults: Monitoring and Management |                                                                                                                                                                                                                                                                                                                                                         |                     |
| 48   |                                                                | The proposed system shall support multiple types of discovery like IP range discovery including built-in support for IPv6, Seed router based discovery and discovery whenever new devices are added with capability to exclude specific devices                                                                                                         |                     |
| 49   |                                                                | The system shall provide discovery & inventory of physical network devices like Layer-2 & Layer-3 switches, Routers and other IP devices and shall provide mapping of LAN & WAN connectivity.                                                                                                                                                           |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                        | Compliance (Yes/No) |
|------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 50   |           | The discovery shall be able to identify and model of the ICT asset.                                                                                                                                                                                                                                                   |                     |
| 51   |           | The proposed system shall provide a detailed asset report, organized by system shall provide sufficient reports that identify unused ports in the managed network infrastructure that can be reclaimed and reallocated. The proposed system shall also intelligently determine which ports are operationally dormant. |                     |
| 52   |           | The proposed system shall determine device availability and shall exclude outages from the availability calculation with an option to indicate the reason.                                                                                                                                                            |                     |
| 53   |           | The proposed system shall include the ability to monitor and visualize a virtualized system infrastructure by discovering and monitoring virtual machines and providing ability to depict the logical relationships between virtual servers and virtual machines.                                                     |                     |
| 54   |           | Should monitor Type of Service (ToS), Differentiated Services Codepoint (DSCP), and Per-Hop Behaviour (PHB), BGP AS and NEXT HOP                                                                                                                                                                                      |                     |
| 55   |           | The proposed solution shall have the ability to collect data from the virtual systems without solely relying on SNMP.                                                                                                                                                                                                 |                     |
| 56   |           | The proposed solution shall support an architecture that can be extended to support multiple virtualization platforms and technologies.                                                                                                                                                                               |                     |
| 57   |           | The proposed system shall support SNMPv3-based network discovery and management out- of-box without the need for any external third-party modules.                                                                                                                                                                    |                     |
| 58   |           | The proposed system shall be able to administer configuration changes to network elements by providing toolkits to automate the following administrative tasks of effecting configuration changes to network elements like Capture running & start- up configuration, Upload configuration etc.                       |                     |
|      | Reporting |                                                                                                                                                                                                                                                                                                                       |                     |
| 59   |           | The proposed system shall provide sufficient reports pertaining to asset and change management, alarms and availability of critical                                                                                                                                                                                   |                     |



| SNo. | Parameter                                           | Specifications                                                                                                                                                                                                                                                                                                                                                                           | Compliance (Yes/No) |
|------|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                                     | network resources as well as network response times for critical links.                                                                                                                                                                                                                                                                                                                  |                     |
| 60   |                                                     | The proposed system shall able to perform real-time or scheduled capture of device configurations. It shall also provide features to capture, view & upload network device configuration.                                                                                                                                                                                                |                     |
| 61   |                                                     | The proposed system shall able to store historical device configurations captured in the database and thereby enable comparison of current device configuration against a previously captured configuration as well as compare the current configuration against any user-defined standard baseline configuration policy.                                                                |                     |
| 62   |                                                     | The proposed system shall be able to monitor compliance & enforce change control policies within the diverse infrastructure by providing data & tools to run compliance reports, track& remediate violations, and view history of changes.                                                                                                                                               |                     |
| 63   |                                                     | The proposed tool shall display configuration changes differences in GUI within central Console. Also this shall be able to identify which user has made changes or modifications to device configurations using the Interface.                                                                                                                                                          |                     |
|      | Service Level Management: Monitoring and Management |                                                                                                                                                                                                                                                                                                                                                                                          |                     |
| 64   |                                                     | The proposed service management system shall provide a detailed service dashboard view indicating the health of each of the component and services provisioned as well as the SLAs.                                                                                                                                                                                                      |                     |
| 65   |                                                     | The system shall provide an outage summary that gives a high-level health indication foreach service as well as the details and root cause of any outage.                                                                                                                                                                                                                                |                     |
| 66   |                                                     | The system shall be capable of managing IT and Non- IT resources in terms of the business services they support, specify and monitor service obligations, and associate users/Departments/ Organizations with the services they rely on and related Service/Operational Level Agreements. Presently, services shall include E-mail, Internet Access, Intranet and other services hosted. |                     |

| SNo. | Parameter                                                                           | Specifications                                                                                                                                                                                                                                                                      | Compliance (Yes/No) |
|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 67   |                                                                                     | The Service Level Agreements (SLAs) definition facility shall support defining a set of one or more service that specify the Service obligations stipulated in an SLA contract for a particular time period (weekly, monthly, and so on).                                           |                     |
| 68   |                                                                                     | SLA violation alarms shall be generated to notify whenever an agreement is violated or is in danger of being violated.                                                                                                                                                              |                     |
| 69   |                                                                                     | The system shall provide the capability to designate planned maintenance periods for services and take into consideration maintenance periods defined at the IT resources level. In addition, the capability to exempt any service outage from impacting an SLA shall be available. |                     |
| 70   |                                                                                     | Should be able to receive flows from non-SNMP-enabled devices, like VMware vSwitch                                                                                                                                                                                                  |                     |
| 71   |                                                                                     | The system shall provide a historical reporting facility that shall allow for the generation of on-demand and scheduled reports of Service related metrics with capabilities for customization of the report presentation.                                                          |                     |
| 72   |                                                                                     | The system shall provide for defining service policies like Service Condition High\Low Sensitivity, Port Status High\Low Sensitivity shall be provided out of the box.                                                                                                              |                     |
| 73   |                                                                                     | The System shall have all the capabilities of a Network Management System which shall provide Real-time network monitoring and Measurement off end-to- end Network performance & availability to define service levels and further improve upon them.                               |                     |
|      | Network Performance Monitoring, Management and Reporting: Monitoring and Management |                                                                                                                                                                                                                                                                                     |                     |
| 74   |                                                                                     | The tool shall provide a live exceptions list displaying the various health and threshold exceptions that are occurring in the managed infrastructure.                                                                                                                              |                     |
| 75   |                                                                                     | The tool shall have the capability to configure different polling speeds for different devices in the                                                                                                                                                                               |                     |

| SNo. | Parameter                                                                               | Specifications                                                                                                                                                                                                                                                                                                                                                      | Compliance (Yes/No) |
|------|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                                                                         | managed infrastructure with capability to poll critical devices                                                                                                                                                                                                                                                                                                     |                     |
| 76   |                                                                                         | This central console shall also provide all required network performance reports (including latency, threshold violations, packet errors, availability, bandwidth utilization etc.) for the network infrastructure. The proposed system shall identify over-and under-utilized links and assist in maximizing the utilization of current resources.                 |                     |
| 77   |                                                                                         | The proposed system shall provide an integrated performance view for all the managed systems and networks along with the various threshold violations alarms in them.                                                                                                                                                                                               |                     |
| 78   |                                                                                         | The proposed monitoring solution should be able to monitor network traffic by capturing flow data from network devices, including Cisco Netflow v5 or v9, Juniper J- Flow, IPFIX, sFlow, NetStream data and also sampled Netflow data. Solution must be able to store ALL flows without any rollups or loss for retention period - for security and audit purposes. |                     |
| 79   |                                                                                         | The proposed system shall be able to auto-calculate resource utilization baselines for the entire managed systems and networks and allow user to set corresponding upper and lower threshold limits.                                                                                                                                                                |                     |
|      | Application Performance Monitoring, Management and Reporting: Monitoring and Management |                                                                                                                                                                                                                                                                                                                                                                     |                     |
| 80   |                                                                                         | The proposed solution shall proactively monitor all user transactions for any web- application hosted; detect failed transactions; gather evidence necessary for triage and diagnosis of problems that affect user experiences and prevent completion of critical business processes                                                                                |                     |
| 81   |                                                                                         | The proposed solution shall see response times based on different call parameters. For example, the proposed solution shall be able to provide CPU utilization metrics.                                                                                                                                                                                             |                     |
| 82   |                                                                                         | The proposed solution shall give visibility into user experience without the need to install agents on user desktops.                                                                                                                                                                                                                                               |                     |

| SNo. | Parameter                                                                                        | Specifications                                                                                                                                                                                                                                                                                                                                    | Compliance (Yes/No) |
|------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 83   |                                                                                                  | The proposed solution shall be able to provide the ability to detect and alert which exact end users experience HTTP error codes such as 404 errors or errors coming from the web application.                                                                                                                                                    |                     |
| 84   |                                                                                                  | The proposed system shall be able to detect user impacting defects and anomalies and reports them in real-time for Slow Response Time, Fast Response time, Low Throughput, Partial Response, Missing component within transaction                                                                                                                 |                     |
| 85   |                                                                                                  | The proposed system shall be able to instantly identify whether performance problems like slow response times are within or outside the Data center without having to rely on network monitoring tools.                                                                                                                                           |                     |
| 86   |                                                                                                  | The proposed system shall be able to provide trend analysis reports and compare the user experience over time by identifying transactions whose performance or count has deteriorated over time.                                                                                                                                                  |                     |
|      | Systems and Database Performance Monitoring, Management and Reporting: Monitoring and Management |                                                                                                                                                                                                                                                                                                                                                   |                     |
| 87   |                                                                                                  | The proposed system shall address management challenges by providing centralized management across physical and virtual systems. The proposed system shall be able to monitor various operating system parameters such as processors, memory, files, processes, file systems, etc. where applicable, using agents on the servers to be monitored. |                     |
| 88   |                                                                                                  | It shall be possible to configure the operating system monitoring agents to monitor based on user-defined thresholds for warning/critical states and escalate events to event console of enterprise management system.                                                                                                                            |                     |
| 89   |                                                                                                  | It shall also be able to monitor various operating system parameters depending on the operating system being monitored yet offer a similar interface for viewing the agents and setting thresholds.                                                                                                                                               |                     |
| 90   |                                                                                                  | The proposed solution shall support monitoring Processors, File Systems, Log Files, System Processes, and Memory etc.                                                                                                                                                                                                                             |                     |

| SNo. | Parameter                                       | Specifications                                                                                                                                                                                                                                                                                                                                                                              | Compliance (Yes/No) |
|------|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 91   |                                                 | The proposed tool shall provide Process and NT Service Monitoring wherein if critical application processes or services fail, administrators are immediately alerted and processes and services are automatically re-started.                                                                                                                                                               |                     |
| 92   |                                                 | The proposed tool shall be able to provide Log File Monitoring which enables administrator to watch system logs and text log files by specifying messages to watch for. When matching messages gets logged, the proposed tool shall notify administrators and enable to act like sending an email.                                                                                          |                     |
| 93   |                                                 | The proposed database performance management system shall integrate network, server & database performance management systems and provide the unified view of the performance state in a single console.                                                                                                                                                                                    |                     |
| 94   |                                                 | It shall be able to automate monitoring, data collection and analysis of performance from single point.                                                                                                                                                                                                                                                                                     |                     |
| 95   |                                                 | It shall also provide the ability to set thresholds and send notifications when an event occurs, enabling database administrators (DBAs) to quickly trace and resolve performance- related bottlenecks.                                                                                                                                                                                     |                     |
| 96   |                                                 | The proposed system shall provide Performance Management and Reporting Provides real- time and historical performance of physical and virtual environments enabling customers gain valuable insights of a given virtual container of the relative performance of a given Virtual Machine compared to other Virtual Machines, and of the relative performance of groups of Virtual Machines. |                     |
| 97   |                                                 | Role based Access Enables role-based management by defining access privileges according to the role of the user.                                                                                                                                                                                                                                                                            |                     |
| 98   |                                                 | The proposed Virtual Performance Management system shall integrate latest virtualization technologies                                                                                                                                                                                                                                                                                       |                     |
|      | Helpdesk - Monitoring, Management and Reporting |                                                                                                                                                                                                                                                                                                                                                                                             |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                               | Compliance (Yes/No) |
|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 99   |           | The proposed helpdesk system shall provide flexibility of logging, viewing, updating and closing incident manually via web interface.                                                                                                                                                                                                                                                                                                                        |                     |
| 100  |           | The proposed helpdesk system shall support ITIL processes like request management, problem management, configuration management and change order management with out-of-the-box templates for various ITIL service support processes.                                                                                                                                                                                                                        |                     |
| 101  |           | Each incident shall be able to associate multiple activity logs entries via manual update or automatic update from other enterprise management tools.                                                                                                                                                                                                                                                                                                        |                     |
| 102  |           | The proposed helpdesk system shall be able to provide flexibility of incident assignment based on the workload, category, location etc.                                                                                                                                                                                                                                                                                                                      |                     |
| 103  |           | Each escalation policy shall allow easy definition on multiple escalation levels and notification to different personnel via window GUI/console with no or minimum programming.                                                                                                                                                                                                                                                                              |                     |
| 104  |           | The proposed helpdesk system shall provide grouping access on different security knowledge articles for different group of users. The proposed helpdesk system shall have an updateable knowledge base for tech al analysis and further help end-users to search solutions for previously solved issues. The proposed helpdesk system shall support tracking of SLA (service level agreements) for call requests within the help desk through service types. |                     |
| 105  |           | The proposed helpdesk system shall be capable of assigning call requests to technical staff manually as well as automatically based on predefined rules, and shall support notification and escalation over email, web etc.                                                                                                                                                                                                                                  |                     |
| 106  |           | The proposed helpdesk system shall integrate tightly with the Knowledge tools and CMDB and shall be accessible from the same login window.                                                                                                                                                                                                                                                                                                                   |                     |
| 107  |           | It shall support remote management for end-user & allow analysts to do the desktop sharing for any system located anywhere, just connected to internet.                                                                                                                                                                                                                                                                                                      |                     |
| 108  |           | The proposed tool must provide an option to design dynamic workflows, lifecycle, Tasks, Notification action for each service which can be requested                                                                                                                                                                                                                                                                                                          |                     |

| SNo. | Parameter                                             | Specifications                                                                                                                                                                                                                                                                                                                              | Compliance (Yes/No) |
|------|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      | Incident Management and Root Cause Analysis Reporting |                                                                                                                                                                                                                                                                                                                                             |                     |
| 109  |                                                       | Tool should have option to promote knowledge to analysts (ServiceDesk) and end users (Service Portal)                                                                                                                                                                                                                                       |                     |
| 110  |                                                       | Incidents shall be categorized and prioritized. While prioritizing incidents the impact and urgency of the incident shall be taken into consideration.                                                                                                                                                                                      |                     |
| 111  |                                                       | It shall be ensured that the incident database is integrated with Known Error Database (KeDB), Configuration Management Database (CMDB). These details shall be accessible to relevant personnel as and when needed.                                                                                                                        |                     |
| 112  |                                                       | Information security incidents and weaknesses associated with information systems shall be communicated in a manner allowing timely corrective action to be taken.                                                                                                                                                                          |                     |
| 113  |                                                       | Conduct regular reviews on performance of incident management activities against documented Key Performance Indicators (KPI's).                                                                                                                                                                                                             |                     |
| 114  |                                                       | Controls related to incident management need to be implemented and each implemented control shall have a documentary evidence to substantiate and demonstrate effective implementation.                                                                                                                                                     |                     |
|      | Change and Configuration Management                   |                                                                                                                                                                                                                                                                                                                                             |                     |
| 115  |                                                       | Change and configuration management shall be governed by the change management and configuration management policy.                                                                                                                                                                                                                         |                     |
| 116  |                                                       | Change management provides information on changes, and enables better control of changes to reduce errors and disruption in services.                                                                                                                                                                                                       |                     |
| 117  |                                                       | All changes shall be initiated using change management process; and a Request for Change (RFC) shall be created. All requests for change shall be evaluated to determine the impact on business processes and IT services, and to assess whether change shall adversely affect the operational environment and introduce unacceptable risk. |                     |
| 118  |                                                       | Controls related to change management need to be implemented and each implemented control shall                                                                                                                                                                                                                                             |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                            | Compliance (Yes/No) |
|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | have a documentary evidence to substantiate and demonstrate effective implementation.                                                                                                                                                                                                     |                     |
| 119  |           | The roles and responsibilities of the management shall include review and approval of the implementation of change management policies, processes and procedures.                                                                                                                         |                     |
| 120  |           | A configuration management database shall be established which stores unique information about each type Configuration Item CI or group of CI.                                                                                                                                            |                     |
| 121  |           | The Configuration Management Database (CMDB) shall be managed such that it ensures its reliability and accuracy including control of update access.                                                                                                                                       |                     |
| 122  |           | The degree of control shall maintain the integrity of services and service components taking into consideration the service requirements and the risks associated with the CI.                                                                                                            |                     |
| 123  |           | Corrective actions shall be taken for any deficiencies identified in the audit and shall be reported to the management and process owners.                                                                                                                                                |                     |
| 124  |           | Information from the CMDB shall be provided to the change management process and the changes to the CI shall be traceable and auditable.                                                                                                                                                  |                     |
| 125  |           | A configuration baseline of the attached CI shall be taken before deployment of a release into the live environment. It shall be stored in the safe environment with appropriate access control.                                                                                          |                     |
| 126  |           | Master copies of CI shall be recorded in the CMDB and shall be stored in secure physical or electronic libraries which shall be referenced in the configuration records. This shall be applicable to documentations, license information, and software and hardware configuration images. |                     |
| 127  |           | Master copies of CI shall be recorded in the CMDB and shall be stored in secure physical or electronic libraries which shall be referenced in the configuration records. This shall be applicable to documentations, license information, and software and hard                           |                     |
|      | IPAM      |                                                                                                                                                                                                                                                                                           |                     |



| SNo. | Parameter        | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Compliance (Yes/No) |
|------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 128  |                  | IPAM solution should have complete IP discovery , IP management with historical tracking                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| 129  |                  | IPAM should have IP Grouping, Sub grouping and role and privileged based access.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                     |
| 130  |                  | Support both IPv4 and V6 along with IP Classes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
|      | Asset Management |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                     |
| 131  |                  | IMACD Lifecycle Management with ITSM Integration: The system must provide full support for the IMACD lifecycle - including Installation, Movement, Addition, Change, and Disposal of IT assets. These IMACD processes should be seamlessly integrated with core ITSM modules such as Incident, Change, and Problem Management. For instance, if a Change Request is initiated for asset relocation, the related IMACD request must be cross-referenced and linked for traceability. All IMACD workflows should support role-based access control (RBAC) at both request and process levels, ensuring secure, permission- driven operations. Additionally, audit trails must be maintained for compliance and transparency. |                     |
| 132  |                  | Asset Installation Management: The platform should allow users to initiate Asset Installation Requests covering deployment of hardware, software, and network components. These requests must include task assignments, approval workflows, and validation checkpoints to ensure that deployed asset are configured correctly and integrated seamlessly into t h e existing infrastructure. Support for dependency mapping and post-install verification is essential.                                                                                                                                                                                                                                                     |                     |
| 133  |                  | Asset Movement with Intelligent Gatepass Control: The system must support Asset Movement Requests, including the generation of digital Gatepasses with customizable fields. Each Gatepass should contain QR codes for individual assets, ownership details, source and destination addresses, and movement status, signature field etc. The Gatepass should be exportable in PDF format and support scanning during transit and at the receiving location. Upon successful receipt and                                                                                                                                                                                                                                     |                     |

| SNo.       | Parameter                      | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Compliance (Yes/No) |
|------------|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|            |                                | scanning, the system should automatically update the asset's location and clear or transfer ownership accordingly.                                                                                                                                                                                                                                                                                                                                               |                     |
| 134        |                                | Asset Addition and Capacity Expansion Support: Users must be able to raise Asset Addition Requests for onboarding new users, devices, applications, or IT components. The process should include validation checks, approvals, asset tagging, and integration with capacity/resource planning modules. The system should track and document each addition to ensure alignment with IT policies and future scalability.                                           |                     |
| 135        |                                | Asset Disposal and Compliance Management: The system must facilitate secure and compliant Asset Disposal processes for obsolete, damaged, or redundant IT assets. This includes integration with disposal vendors, capture of disposal certificates, data sanitization logs, and final approval workflows. The platform should ensure adherence to organizational, environmental, and legal standards, and maintain disposal audit records for future reference. |                     |
| <b>46.</b> | <b>Videowall</b>               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
|            | Video wall cube                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
|            | Display Wall Screen size       | 70" (diagonally) with Laser Light Source complete configuration with covered base                                                                                                                                                                                                                                                                                                                                                                                |                     |
|            | Indicative Configuration       | 10 columns x 4 rows                                                                                                                                                                                                                                                                                                                                                                                                                                              |                     |
|            | Projection Technology          | LASER DLP based Rear Projection                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
|            | Total resolution of Video wall | Minimum wall resolution of video wall should be 320 Megapixel                                                                                                                                                                                                                                                                                                                                                                                                    |                     |
|            | Screen to Screen Gap           | ≤ 0.2 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
|            |                                | Individual cube should be equipped with One laser bank, and the laser bank should have an array of diodes. Single or multiple diode failure should not impact image display on the screen. Multiple Laser banks not acceptable due to possibility of convergence issues                                                                                                                                                                                          |                     |
|            | Brightness of engine           | Min 2200 Lumens                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
|            | Laser Safety                   | Minimum 1000 Laser cubes should be working in India to prove Laser safety                                                                                                                                                                                                                                                                                                                                                                                        |                     |

| SNo. | Parameter                                                                                                       | Specifications                                                                                                                      | Compliance (Yes/No) |
|------|-----------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      | Brightness Uniformity                                                                                           | Minimum 95 %                                                                                                                        |                     |
|      | Dust Prevention                                                                                                 | Should be IP6X certified. Test certificate should be submit as proof along with technical bid submission                            |                     |
|      | Light Source Lifetime                                                                                           | Lifetime of Light Source in normal Mode : 1,25,000Hrs                                                                               |                     |
|      | Remote                                                                                                          | IR remote control should also be provided for quick access                                                                          |                     |
|      | Inputs                                                                                                          | 1 no. of Display Port, DVI and HDMI each                                                                                            |                     |
|      | Screen Support                                                                                                  | Screen should be minimum 3 layers with a Hard Backing to prevent bulging                                                            |                     |
|      | Heat Dissipation                                                                                                | Less Than 1400 BTU/h – Normal mode                                                                                                  |                     |
|      | Power                                                                                                           | Dual Redundant and Hot Swappable Power Supply. This should be built inside the cube for fail safe operation with cooling features   |                     |
|      |                                                                                                                 | Power supplies extended or kept outside the cube are not acceptable                                                                 |                     |
|      | Eco mode                                                                                                        | Less than 350 Watt                                                                                                                  |                     |
|      | Cooling Inside Cube                                                                                             | Any advanced cooling mechanism and Cooling mechanism should not have any hazardous liquid.                                          |                     |
|      | Remote management                                                                                               | Remote management through IP for parameter adjustment. Should be able to control & monitor individual cube, multiple cubes.         |                     |
|      | through IP                                                                                                      |                                                                                                                                     |                     |
|      | Access                                                                                                          | Rear only                                                                                                                           |                     |
|      | Pixel clock                                                                                                     | Min 162 MHz or higher to ensure flicker less display                                                                                |                     |
|      | Source Redundancy                                                                                               | System should able to switch to secondary input if primary input is not available.                                                  |                     |
|      |                                                                                                                 | System should also automatically switch back to primary input from secondary input as soon as the primary input is available again. |                     |
|      | Cube Depth                                                                                                      | Cube Depth - 550 ±5 % mm                                                                                                            |                     |
|      | Operating conditions                                                                                            |                                                                                                                                     |                     |
|      | Temperature                                                                                                     | 10°C-40°C   50°F-105°F                                                                                                              |                     |
|      | Humidity                                                                                                        | Up to 80% non-condensing                                                                                                            |                     |
|      | Video wall controller                                                                                           |                                                                                                                                     |                     |
|      | The network-based solution should consist of a set of encoders and decoders, which can encode Digital or Analog |                                                                                                                                     |                     |

| SNo. | Parameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Specifications                                  | Compliance (Yes/No) |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|---------------------|
|      | signals and transmit them over the network. The decoders should be able to decode these signals and display up to 64 sources per channel. The decoders should have high accuracy frame-sync to enable multiple decoders to form a prefect video wall. It should be possible to show any of the input sources or all of the input sources in any position on the wall, in any size and any configuration. The system should support automatic format detection for plug and play simplicity. Adding a source or display unit to the system should only entail adding an encoder or a decoder. The quantity of encoders should be equal to the inputs to the system; the quantity of the decoders should be equal to the no of displays in the system. The encoder and decoders should meet the minimum specification as follows. |                                                 |                     |
|      | ENCODER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                 |                     |
|      | Parameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Desired Specification                           |                     |
|      | Input                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | HDMI 2.0/ DP1.2 support up to 3840x 2160@ 60 Hz |                     |
|      | Input Color Depth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Color Depth 8 /10bits per pixel                 |                     |
|      | Input Channels                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Channels 1                                      |                     |
|      | Ethernet                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Ethernet Gigabit 1000 BASE-T                    |                     |
|      | Interface                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2x RJ-45, Redundant LAN port                    |                     |
|      | Protocols                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Protocols DHCP, UDP,TCP/IP                      |                     |

| SNo. | Parameter             | Specifications                                                                                 | Compliance (Yes/No) |
|------|-----------------------|------------------------------------------------------------------------------------------------|---------------------|
|      | IP Address            | IP Address Static IP address, Automatic IP address                                             |                     |
|      | Power on Ethernet     | Support POE                                                                                    |                     |
|      | KVM                   | Support IP KVM function                                                                        |                     |
|      | MTBF                  | > 100,000 Hours                                                                                |                     |
|      | Supported Resolutions | Minimum Up to 3840x 2160 @ 60 Hz                                                               |                     |
|      | Power Requirement     | 100-240 VAC                                                                                    |                     |
|      | Operation Temperature | Minimum range 0-40 deg. C                                                                      |                     |
|      | Display processor     |                                                                                                |                     |
|      | Parameter             | Desired Specification                                                                          |                     |
|      | Output                | HDMI 2.0 support up to 3840x 2160@ 60 Hz                                                       |                     |
|      | Color Depth           | 8/10 bits                                                                                      |                     |
|      | Channel               | Channels 1                                                                                     |                     |
|      | Ethernet              | Gigabit 1000 BASE-T                                                                            |                     |
|      | Interface             | 2x RJ-45, Redundant LAN port                                                                   |                     |
|      | Power on Ethernet     | Support POE                                                                                    |                     |
|      | Protocols             | DHCP, UDP, TCP/IP                                                                              |                     |
|      | IP Address            | Static IP address, Automatic IP address                                                        |                     |
|      | KVM                   | Support IP KVM function                                                                        |                     |
|      | Image Processing      | Max. 64 free window in one display                                                             |                     |
|      |                       | High tap filter for image scaling                                                              |                     |
|      |                       | Support H2.64/H.265/ MPEG4 Decoding                                                            |                     |
|      |                       | Accurate synchronization for display wall                                                      |                     |
|      |                       | Bezel Compensation                                                                             |                     |
|      |                       | Window title with vector texts                                                                 |                     |
|      | MTBF                  | > 100,000 Hours                                                                                |                     |
|      | Power Requirement     | 100-240 VAC                                                                                    |                     |
|      | Operation Temperature | Minimum range 0-40 deg. C                                                                      |                     |
|      | SERVER SPECIFICATIONS |                                                                                                |                     |
|      | CPU                   | CPU: Processor: Intel Xeon E3-1230 v5 Processor (Quad Core, 3.40 GHz, 8M Cache, 80W) or above; |                     |
|      | Memory                | 8GB UDIMM, 2400MT/s, Single Rank, x8 Data Width or above;                                      |                     |
|      | Network               | 1000-M LAN port*2;                                                                             |                     |
|      | OS                    | Windows Server 2008/2012/2016 (64 bits                                                         |                     |
|      | HDD                   | 240GB SSD SATA Mix Use 6Gbps 512n 2.5in Hot-plug Drive or above;                               |                     |

| SNo. | Parameter                      | Specifications                                                                                                                                                                               | Compliance (Yes/No) |
|------|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      | WALL MANAGEMENT SOFTWARE       |                                                                                                                                                                                              |                     |
|      | Architecture                   | Browser & Server based Architecture                                                                                                                                                          |                     |
|      | Web browser login              | User should be able to login the server with Internet Explorer. There should be no need to install any additional software on the control computer.                                          |                     |
|      | Layouts                        | Should support static layout and automatic layout creation, editing, loading, and deleting. Any layout should be loaded in under 1 sec (irrespective of size of display & number of windows) |                     |
|      | Multiple Display Support       | Software should able to manage multiple displays simultaneously including status monitoring, video window control and properties setup.                                                      |                     |
|      | Preview of signals             | Software should able to preview video signals before opening window on display wall                                                                                                          |                     |
|      | Drag & Drop                    | Operator should be able to preview the content of video/RGB signal by dragging the signal source into the signal preview window should be possible                                           |                     |
|      | Preview of signals             | The system software should support at least 5 RGB / Video signals preview at the same time.                                                                                                  |                     |
|      | Multiple concurrent users      | Software should support multiple users managing a display wall or more display walls at the same time.                                                                                       |                     |
|      | Layout Scheduler               | All the Layouts can be scheduled as per user convenience                                                                                                                                     |                     |
|      | Auto Launch of Layouts         | Software should support auto launch of Layouts according to specified time event by user                                                                                                     |                     |
|      | Log file                       | Software should support user log file management                                                                                                                                             |                     |
|      | Offline Layouts                | It should be possible to create offline layouts                                                                                                                                              |                     |
|      | No of input source per channel | It should support at least 48 signal sources displaying in one display unit simultaneously with freely scalable windows.                                                                     |                     |
|      | Playback                       | The software GUI should be able to show the live view of all the sources on the browser                                                                                                      |                     |
|      | Grid management                | System software should able to manage Videowall region into multiple regions as per user requirements.                                                                                       |                     |
|      | Pre window option              | User should be able to see multiple signal source in one window with specified time interval and with user defined sequence.                                                                 |                     |
|      | Wi-Fi Control                  | User should be able to control complete system through IPAD and Android system over Wi-Fi                                                                                                    |                     |

| SNo.       | Parameter             | Specifications                                                                                                                                                             | Compliance (Yes/No) |
|------------|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| <b>47.</b> | <b>Workstations</b>   |                                                                                                                                                                            |                     |
| 1          | Processor             | Intel Core Ultra 7 265K (20 Core 3.9GHz) or better                                                                                                                         |                     |
| 2          | RAM                   | 32 GB DDR5 5600 MT/s to be supplied.                                                                                                                                       |                     |
|            |                       | Support upto 128GB DDR5 5600 MT/s                                                                                                                                          |                     |
| 3          | Storage               | 512 GB M.2 NVMe SSD to be supplied                                                                                                                                         |                     |
|            |                       | Support upto 3x M.2 NVMe SSD                                                                                                                                               |                     |
|            |                       | Support upto 3x 3.5" HDD, front accessible                                                                                                                                 |                     |
| 4          | Chipset               | Intel W880 workstation class chipset                                                                                                                                       |                     |
| 5          | Graphic Card          | 1x Nvidia RTX2000 ADA 16GB GPU to be supplied.                                                                                                                             |                     |
|            |                       | Support upto Nvidia RTX Pro 6000 Blackwell workstation edition.                                                                                                            |                     |
| 6          | Network               | 1x 1GbE and 1x 5GbE                                                                                                                                                        |                     |
| 7          | Expansion Slots       | 4 – PCIe add-in slots (1- Gen5 x16 + 3- x4 of mixed Gen3/Gen4)                                                                                                             |                     |
| 8          | I/O Ports             | USB Type A – 2 in front and 2 in rear                                                                                                                                      |                     |
|            |                       | USB Type C – 2 in front and 2 in rear                                                                                                                                      |                     |
|            |                       | 1 – RJ45 1GbE                                                                                                                                                              |                     |
|            |                       | 1 – Global headset jack (audio in/out combo)                                                                                                                               |                     |
| 9          | Power                 | Support for 360W, 500W and 1500W PSU.                                                                                                                                      |                     |
|            |                       | Suitable PSU to be provided as per system requirement.                                                                                                                     |                     |
| 10         | OS                    | Windows 11 Pro                                                                                                                                                             |                     |
| 11         | Monitor               | Dual 24" monitors should be supplied from the same OEM                                                                                                                     |                     |
| 12         | Keyboard & Mouse      | Wired Keyboard & Mouse from same OEM                                                                                                                                       |                     |
| 13         | Optical Drive         | 8x DVD+/-RW                                                                                                                                                                |                     |
| 14         | Form Factor           | 32L mid-tower for better PSU/GPU headroom                                                                                                                                  |                     |
| 15         | Security Features     | SafelD with ControlVault 3+: Dedicated hardware credential vault, FIPS 140-3 Level 3 certified.                                                                            |                     |
|            |                       | SafeBIOS & Indicators of Attack: Off-host BIOS / firmware verification and telemetry to detect tampering at device level; integrated with industry-leading security tools. |                     |
|            |                       | TPM 2.0, Digital Device Identity and Secured Component Verification (DDI), Certificate Based Authentication (CBA) and Authenticated BIOS Interface (ABI)                   |                     |
| 16         | Product Certification | BIS, Energy Star and EPEAT                                                                                                                                                 |                     |

| SNo.       | Parameter                                     | Specifications                                                                                                                                                                                                | Compliance (Yes/No) |
|------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 17         | OEM Certification                             | ISO9001, ISO27001 and ISO45001                                                                                                                                                                                |                     |
| 18         | Warranty                                      | 5 years On-site comprehensive Next Business Day warranty with 24x7x365 remote hardware support. The warranty details along with the offered BOM should be available online on the support website of the OEM. |                     |
| <b>48.</b> | <b>Keyboard Joystick for PTZ</b>              |                                                                                                                                                                                                               |                     |
| 1          | Joystick Type                                 | 3-axis proportional joystick with Pan / Tilt / Twist Zoom control                                                                                                                                             |                     |
| 2          | PTZ Control                                   | Real-time proportional PTZ movement with variable speed control                                                                                                                                               |                     |
| 3          | Preset Control                                | Support for PTZ preset call and preset programming                                                                                                                                                            |                     |
| 4          | Buttons                                       | Minimum 8                                                                                                                                                                                                     |                     |
| 5          | Housing                                       | Metal and plastic                                                                                                                                                                                             |                     |
| 6          | Power                                         | DC12V-2A                                                                                                                                                                                                      |                     |
| 7          | Interface                                     | 1 Ethernet port, IEEE 802.11b/g/n                                                                                                                                                                             |                     |
| 8          | Connectors                                    | Minimum USB2.0                                                                                                                                                                                                |                     |
| 9          | Operating temperature                         | 14°F-131°F (-10°C~55°C)                                                                                                                                                                                       |                     |
| 10         | Operating Humidity                            | 20%~80% Frostless                                                                                                                                                                                             |                     |
| 11         | Storage Temperature                           | 14°F-140°F (-10°C-60°C)                                                                                                                                                                                       |                     |
| 12         | Storage Humidity                              | 0-90% Frostless                                                                                                                                                                                               |                     |
| 13         | Product Certification                         | CE/FCC/BIS                                                                                                                                                                                                    |                     |
| <b>49.</b> | <b>LED TV 55"</b>                             |                                                                                                                                                                                                               |                     |
| 1          | Screen Size (Diagonal) (cm)                   | 53.5 - 55.5                                                                                                                                                                                                   |                     |
| 2          | Panel Type                                    | Twisted Nematic (TN)                                                                                                                                                                                          |                     |
| 3          | Resolution (Pixels)                           | 1920 x 1080 (Full HD)                                                                                                                                                                                         |                     |
| 4          | Aspect Ratio                                  | 16:09                                                                                                                                                                                                         |                     |
| 5          | Brightness (Nits)                             | 250                                                                                                                                                                                                           |                     |
| 6          | Native Contrast Ratio (Minimum)               | 1000:01:00                                                                                                                                                                                                    |                     |
| 7          | Viewing Angle (Horizontal: Vertical) (Degree) | 170:160                                                                                                                                                                                                       |                     |
| 8          | Response Time (millisecond)                   | 5 milliseconds                                                                                                                                                                                                |                     |
| 9          | Antiglare Coating                             | No                                                                                                                                                                                                            |                     |
| 10         | Split Screen Feature                          | Available                                                                                                                                                                                                     |                     |
| 11         | Inbuilt Speakers                              | Available                                                                                                                                                                                                     |                     |



| SNo. | Parameter                                            | Specifications | Compliance (Yes/No) |
|------|------------------------------------------------------|----------------|---------------------|
| 12   | VGA Port                                             | Available      |                     |
| 13   | HDMI Port                                            | Not Available  |                     |
| 14   | DVI-D Port                                           | Available      |                     |
| 15   | Display Port                                         | Not Available  |                     |
| 16   | Power Consumption in Operating Mode (Maximum) (Watt) | 19.5           |                     |
| 17   | Power Consumption in Sleep Mode (Maximum) (Watt)     | 0.45           |                     |
| 18   | Mounting Arrangement                                 | Table Mount    |                     |
| 19   | TCO Certification                                    | TCO-07         |                     |
| 20   | BIS Registration under CRS of Meity                  | Yes            |                     |
| 21   | Operating Temperature Range (Degree Celsius)         | 0-40 Degree C  |                     |
| 22   | Operating Humidity (%RH)                             | 20% - 80%      |                     |
| 23   | Power Supply                                         | 230V AC, 50 Hz |                     |
| 24   | Type Of Power Supply                                 | External       |                     |
| 25   | On Site OEM Warranty (Year)                          | 5              |                     |

#### Group-8: Data Center, Servers & Storage Infrastructure

| SNo.       | Parameter                                            | Specifications                                                   | Compliance (Yes/No) |
|------------|------------------------------------------------------|------------------------------------------------------------------|---------------------|
| <b>50.</b> | <b>Application &amp; Failover Application Server</b> |                                                                  |                     |
| 1          | Application Server                                   | 1U 10x2.5" Chassis                                               |                     |
| 2          |                                                      | General Computing - Power Efficiency                             |                     |
| 3          |                                                      | Data Center Environment 30 Degree Celsius / 86 Degree Fahrenheit |                     |
| 4          |                                                      | 32 Core, 2.3GHz Processor                                        |                     |
| 5          |                                                      | 1U Performance Heatsink                                          |                     |
| 6          |                                                      | 32GB DDR5 6400MHz (2Rx8) RDIMM                                   |                     |
| 7          |                                                      | Select Storage devices - no configured RAID required             |                     |
| 8          |                                                      | RAID 8i 4GB Flash PCIe Gen4 12Gb Adapter                         |                     |
| 9          |                                                      | 1U 4x2.5" SAS/SATA Backplane                                     |                     |

| SNo. | Parameter | Specifications                                                                      | Compliance (Yes/No) |
|------|-----------|-------------------------------------------------------------------------------------|---------------------|
| 10   |           | M.2 RAID SATA/NVMe Enablement Kit                                                   |                     |
| 11   |           | M.2 480GB Read Intensive NVMe SSD                                                   |                     |
| 12   |           | 10GBASE-T 2-port Ethernet Adapter                                                   |                     |
| 13   |           | x16/x16 PCIe Gen5 Cable Riser                                                       |                     |
| 14   |           | Full Height + Low Profile Riser Cage                                                |                     |
| 15   |           | 1300W 230V/115V Titanium Hot-Swap Power Supply                                      |                     |
| 16   |           | 2.8m, 10A/100-250V, C13 to C14 Jumper Cord (India)                                  |                     |
| 17   |           | 1U Performance Fan Module                                                           |                     |
| 18   |           | 1U Standard Media Bay                                                               |                     |
| 19   |           | Toolless Slide Rail Kit                                                             |                     |
| 20   |           | TPM 2.0 with Secure Boot                                                            |                     |
| 21   |           | Enable IPMI-over-LAN                                                                |                     |
| 22   |           | Intrusion Cable                                                                     |                     |
| 23   |           | 3yr Base Warranty                                                                   |                     |
| 24   |           | 1U Security Bezel                                                                   |                     |
| 25   |           | Operating System & Licensing                                                        |                     |
| 26   |           | Windows Server 2025 Addl Lic                                                        |                     |
| 27   |           | Windows Server 2025 Standard Additional License (16 core) (No Media/Key) (POS Only) |                     |
| 28   |           | Windows Server 2025                                                                 |                     |
| 29   |           | Windows Server 2025 Standard (16 core) - MultiLang (not preinstalled)               |                     |
| 30   |           | Registration only                                                                   |                     |
| 31   |           | Win Svr Standard 2025 to 2022 Downgrade Kit- Multilanguage                          |                     |
| 32   |           | Drop-in-the-Box                                                                     |                     |
| 33   |           | Additional Licensing                                                                |                     |
| 34   |           | Windows Server 2025 Standard Additional License (16 core) (No Media/Key) (POS Only) |                     |
| 35   |           | Win Svr Standard 2025 to 2022 Downgrade Kit- Multilanguage                          |                     |
| 36   |           | Windows Server 2025 Standard (16 core) - MultiLang (not preinstalled)               |                     |
| 37   |           | Management Software                                                                 |                     |
| 38   |           | Advanced Server Management Software, Per Endpoint w/5 Yr SW S&S                     |                     |

| SNo. | Parameter                   | Specifications                                                   | Compliance (Yes/No) |
|------|-----------------------------|------------------------------------------------------------------|---------------------|
| 39   |                             | Registration only                                                |                     |
| 40   |                             | Per Managed Endpoint w/5 Yr SW S&S                               |                     |
| 41   |                             | Support & Services                                               |                     |
| 42   |                             | Server Support 24X7 4HR Response                                 |                     |
| 43   |                             | Support Duration - 60 Months                                     |                     |
| 44   |                             | 24x7 4hr Response                                                |                     |
| 45   |                             | Installation                                                     |                     |
| 46   |                             | Server Installation                                              |                     |
| 47   |                             | Hardware Installation (Business Hours)                           |                     |
| 48   |                             | Add-On Service                                                   |                     |
| 49   |                             | Keep Your Drive (KYD) Add-On                                     |                     |
| 50   |                             | Duration - 60 Months                                             |                     |
|      | Failover Application Server |                                                                  |                     |
| 1    |                             | 1U 10x2.5" Chassis                                               |                     |
| 2    |                             | General Computing - Power Efficiency                             |                     |
| 3    |                             | Data Center Environment 30 Degree Celsius / 86 Degree Fahrenheit |                     |
| 4    |                             | 32C 225W 2.3GHz Processor                                        |                     |
| 5    |                             | 1U Performance Heatsink                                          |                     |
| 6    |                             | 32GB DDR5 6400MHz (2Rx8) RDIMM                                   |                     |
| 7    |                             | Select Storage devices - no configured RAID required             |                     |
| 8    |                             | RAID 8i 4GB Flash PCIe Gen4 12Gb Adapter                         |                     |
| 9    |                             | 1U 4x2.5" SAS/SATA Backplane                                     |                     |
| 10   |                             | M.2 RAID SATA/NVMe Enablement Kit                                |                     |
| 11   |                             | M.2 480GB Read Intensive NVMe SSD                                |                     |
| 12   |                             | 10GBASE-T 2-port Ethernet Adapter                                |                     |
| 13   |                             | x16/x16 PCIe Gen5 Cable Riser                                    |                     |
| 14   |                             | Full Height + Low Profile Riser Cage                             |                     |
| 15   |                             | 1300W 230V/115V Titanium Hot-Swap Power Supply                   |                     |
| 16   |                             | 2.8m, 10A/100-250V, C13 to C14 Jumper Cord (India)               |                     |
| 17   |                             | 1U Performance Fan Module                                        |                     |
| 18   |                             | 1U Standard Media Bay                                            |                     |
| 19   |                             | Toolless Slide Rail Kit                                          |                     |

| SNo. | Parameter | Specifications                                                                      | Compliance (Yes/No) |
|------|-----------|-------------------------------------------------------------------------------------|---------------------|
| 20   |           | TPM 2.0 with Secure Boot                                                            |                     |
| 21   |           | Enable IPMI-over-LAN                                                                |                     |
| 22   |           | Intrusion Cable                                                                     |                     |
| 23   |           | 1U Security Bezel                                                                   |                     |
| 24   |           | 3yr Base Warranty                                                                   |                     |
| 25   |           | OS & Licensing                                                                      |                     |
| 26   |           | Windows Server 2025 Addl Lic                                                        |                     |
| 27   |           | Windows Server 2025 Standard Additional License (16 core) (No Media/Key) (POS Only) |                     |
| 28   |           | Windows Server 2025                                                                 |                     |
| 29   |           | Windows Server 2025 Standard (16 core) - MultiLang (not preinstalled)               |                     |
| 30   |           | Registration only                                                                   |                     |
| 31   |           | Win Svr Standard 2025 to 2022 Downgrade Kit- Multilanguage                          |                     |
| 32   |           | Drop-in-the-Box                                                                     |                     |
| 33   |           | Additional Licensing                                                                |                     |
| 34   |           | Windows Server 2025 Standard Additional License (16 core) (No Media/Key) (POS Only) |                     |
| 35   |           | Win Svr Standard 2025 to 2022 Downgrade Kit- Multilanguage                          |                     |
| 36   |           | Windows Server 2025 Standard (16 core) - MultiLang (not preinstalled)               |                     |
| 37   |           | Management Software                                                                 |                     |
| 38   |           | Server Management Software, Per Endpoint w/5 Yr SW S&S                              |                     |
| 39   |           | Registration only                                                                   |                     |
| 40   |           | Per Managed Endpoint w/5 Yr SW S&S                                                  |                     |
| 41   |           | Support                                                                             |                     |
| 42   |           | Server Support 24X7 4HR RESP                                                        |                     |
| 43   |           | Premier Support                                                                     |                     |
| 44   |           | Months                                                                              |                     |
| 45   |           | 24x7 4hr Resp                                                                       |                     |
| 46   |           | Installation                                                                        |                     |
| 47   |           | Server Installation                                                                 |                     |
| 48   |           | Hardware Installation (Business Hours)                                              |                     |
| 49   |           | Add-On                                                                              |                     |

| SNo.       | Parameter               | Specifications                                                   | Compliance (Yes/No) |
|------------|-------------------------|------------------------------------------------------------------|---------------------|
| 50         |                         | Server Keep Your Drive Add-On                                    |                     |
| 51         |                         | KYD                                                              |                     |
| 52         |                         | Duration 60 Months                                               |                     |
| <b>51.</b> | <b>Recording Server</b> |                                                                  |                     |
| 1          | Recording Server        | Recording Server 2U : 2U Rack Server – 3yr Base Warranty         |                     |
| 2          |                         | 2U 12x3.5" Chassis                                               |                     |
| 3          |                         | General Computing - Power Efficiency                             |                     |
| 4          |                         | Data Center Environment 30 Degree Celsius / 86 Degree Fahrenheit |                     |
| 5          |                         | 16C 150W 2.3GHz Processor                                        |                     |
| 6          |                         | 2U Performance Heatsink                                          |                     |
| 7          |                         | 16GB DDR5 6400MHz (1Rx8) RDIMM                                   |                     |
| 8          |                         | Select Storage devices - no configured RAID required             |                     |
| 9          |                         | RAID 16i 4GB Flash PCIe Gen4 12Gb Adapter                        |                     |
| 10         |                         | 3.5" 20TB 7.2K SATA 6Gb Hot Swap 512e HDD                        |                     |
| 11         |                         | 2U 12x3.5" SAS/SATA Backplane                                    |                     |
| 12         |                         | M.2 RAID SATA/NVMe Enablement Kit                                |                     |
| 13         |                         | M.2 480GB Read Intensive NVMe SSD                                |                     |
| 14         |                         | 10GBASE-T 2-port Ethernet Adapter                                |                     |
| 15         |                         | x16 Rear Direct PCIe Riser Slot                                  |                     |
| 16         |                         | 1300W 230V/115V Titanium Hot-Swap Power Supply                   |                     |
| 17         |                         | 2.8m, 10A/100-250V, C13 to C14 Jumper Cord (India)               |                     |
| 18         |                         | 2U High Performance Fan Module                                   |                     |
| 19         |                         | Toolless Slide Rail Kit                                          |                     |
| 20         |                         | 2U EIA Latch Standard                                            |                     |
| 21         |                         | TPM 2.0 with Secure Boot                                         |                     |
| 22         |                         | Enable IPMI-over-LAN                                             |                     |
| 23         |                         | 2U Security Bezel                                                |                     |
| 24         |                         | Intrusion Switch Cable Kit                                       |                     |
| 25         |                         | 3 Years Base warranty                                            |                     |
| 26         |                         | Controller / Management                                          |                     |
| 27         |                         | Advanced Server Management Controller License                    |                     |
| 28         |                         | Controller Premium Feature Enablement (FOD)                      |                     |

| SNo. | Parameter                 | Specifications                                                        | Compliance (Yes/No) |
|------|---------------------------|-----------------------------------------------------------------------|---------------------|
| 29   |                           | Operating System                                                      |                     |
| 30   |                           | Windows Server 2025                                                   |                     |
| 31   |                           | Windows Server 2025 Standard (16 core) - MultiLang (not preinstalled) |                     |
| 32   |                           | Registration only                                                     |                     |
| 33   |                           | Win Svr Standard 2025 to 2022 Downgrade Kit- Multilanguage            |                     |
| 34   |                           | Drop-in-the-Box                                                       |                     |
| 35   |                           | Additional Licensing                                                  |                     |
| 36   |                           | Win Svr Standard 2025 to 2022 Downgrade Kit- Multilanguage            |                     |
| 37   |                           | Windows Server 2025 Standard (16 core) - MultiLang (not preinstalled) |                     |
| 38   |                           | Management Software                                                   |                     |
| 39   |                           | Server Management Software, Per Endpoint w/5 Yr SW S&S                |                     |
| 40   |                           | Registration only                                                     |                     |
| 41   |                           | Per Managed Endpoint w/5 Yr SW S&S                                    |                     |
| 42   |                           | Support                                                               |                     |
| 43   |                           | Server Support 24X7 4HR RESP                                          |                     |
| 44   |                           | Premier Support                                                       |                     |
| 45   |                           | Months                                                                |                     |
| 46   |                           | 24x7 4hr Resp                                                         |                     |
| 47   |                           | Installation                                                          |                     |
| 48   |                           | Server Installation                                                   |                     |
| 49   |                           | Hardware Installation (Business Hours)                                |                     |
| 50   |                           | Add-On                                                                |                     |
| 51   |                           | Server Keep Your Drive Add-On                                         |                     |
| 52   |                           | KYD                                                                   |                     |
| 53   |                           | duration 60 Months                                                    |                     |
|      | Failover Recording Server |                                                                       |                     |
| 1    |                           | 2U 12x3.5" Chassis                                                    |                     |
| 2    |                           | General Computing - Power Efficiency                                  |                     |
| 3    |                           | Data Center Environment 30 Degree Celsius / 86 Degree Fahrenheit      |                     |
| 4    |                           | 16C 150W 2.3GHz Processor                                             |                     |
| 5    |                           | 2U Performance Heatsink                                               |                     |

| SNo. | Parameter | Specifications                                                        | Compliance (Yes/No) |
|------|-----------|-----------------------------------------------------------------------|---------------------|
| 6    |           | 16GB DDR5 6400MHz (1Rx8) RDIMM                                        |                     |
| 7    |           | Select Storage devices - no configured RAID required                  |                     |
| 8    |           | RAID 16i 4GB Flash PCIe Gen4 12Gb Adapter                             |                     |
| 9    |           | 3.5" 20TB 7.2K SATA 6Gb Hot Swap 512e HDD                             |                     |
| 10   |           | 2U 12x3.5" SAS/SATA Backplane                                         |                     |
| 11   |           | M.2 RAID SATA/NVMe Enablement Kit                                     |                     |
| 12   |           | M.2 480GB Read Intensive NVMe SSD                                     |                     |
| 13   |           | 10GBASE-T 2-port Ethernet Adapter                                     |                     |
| 14   |           | x16 Rear Direct PCIe Riser Slot                                       |                     |
| 15   |           | 1300W 230V/115V Titanium Hot-Swap Power Supply                        |                     |
| 16   |           | 2.8m, 10A/100-250V, C13 to C14 Jumper Cord (India)                    |                     |
| 17   |           | 2U High Performance Fan Module                                        |                     |
| 18   |           | Toolless Slide Rail Kit                                               |                     |
| 19   |           | 2U EIA Latch Standard                                                 |                     |
| 20   |           | TPM 2.0 with Secure Boot                                              |                     |
| 21   |           | Enable IPMI-over-LAN                                                  |                     |
| 22   |           | 2U Security Bezel                                                     |                     |
| 23   |           | Intrusion Switch Cable Kit                                            |                     |
| 24   |           | 3yr Base Warranty                                                     |                     |
| 25   |           | Controller / Management                                               |                     |
| 26   |           | Server Management Controller Premium License                          |                     |
| 27   |           | Controller Premium Feature Enablement (FOD)                           |                     |
| 28   |           | Operating System                                                      |                     |
| 29   |           | Windows Server 2025                                                   |                     |
| 30   |           | Windows Server 2025 Standard (16 core) - MultiLang (not preinstalled) |                     |
| 31   |           | Registration only                                                     |                     |
| 32   |           | Win Svr Standard 2025 to 2022 Downgrade Kit- Multilanguage            |                     |
| 33   |           | Drop-in-the-Box                                                       |                     |
| 34   |           | Additional Licensing                                                  |                     |
| 35   |           | Win Svr Standard 2025 to 2022 Downgrade Kit- Multilanguage            |                     |

| SNo.       | Parameter               | Specifications                                                        | Compliance (Yes/No) |
|------------|-------------------------|-----------------------------------------------------------------------|---------------------|
| 36         |                         | Windows Server 2025 Standard (16 core) - MultiLang (not preinstalled) |                     |
| 37         |                         | Management Software                                                   |                     |
| 38         |                         | Server Management Software, Per Endpoint w/5 Yr SW S&S                |                     |
| 39         |                         | Registration only                                                     |                     |
| 40         |                         | Per Managed Endpoint w/5 Yr SW S&S                                    |                     |
| 41         |                         | Support                                                               |                     |
| 42         |                         | Server Support 24X7 4HR RESP                                          |                     |
| 43         |                         | Premier Support                                                       |                     |
| 44         |                         | Months                                                                |                     |
| 45         |                         | 24x7 4hr Resp                                                         |                     |
| 46         |                         | Installation                                                          |                     |
| 47         |                         | Server Installation                                                   |                     |
| 48         |                         | Hardware Installation (Business Hours)                                |                     |
| 49         |                         | Add-On                                                                |                     |
| 50         |                         | Server Keep Your Drive Add-On                                         |                     |
| 51         |                         | KYD                                                                   |                     |
| 52         |                         | Duration 60 Months                                                    |                     |
| <b>52.</b> | <b>Analytics Server</b> |                                                                       |                     |
| 1          |                         | 2U 2.5"/EDSFF 3.5 Chassis                                             |                     |
| 2          |                         | General Computing - Power Efficiency                                  |                     |
| 3          |                         | Data Center Environment 25 Degree Celsius / 77 Degree Fahrenheit      |                     |
| 4          |                         | 64C 350W 2.4GHz Processor                                             |                     |
| 5          |                         | 2U Performance Heatsink                                               |                     |
| 6          |                         | 64GB DDR5 6400MHz (2Rx4) RDIMM                                        |                     |
| 7          |                         | Select Storage devices - no configured RAID required                  |                     |
| 8          |                         | RAID 16i 4GB Flash PCIe Gen4 12Gb Adapter                             |                     |
| 9          |                         | 2.5" 3.84TB Read Intensive SATA 6Gb HS SSD SED                        |                     |
| 10         |                         | 2.5" 1.92TB Read Intensive SATA 6Gb HS SSD SED                        |                     |
| 11         |                         | 2U 8x2.5" SAS/SATA Backplane                                          |                     |
| 12         |                         | 10GBASE-T 2-port OCP Ethernet Adapter                                 |                     |
| 13         |                         | High-speed PCIe Gen5 VPI Adapter (NDR 400Gb class, OSFP, single port) |                     |



| SNo. | Parameter | Specifications                                                                   | Compliance (Yes/No) |
|------|-----------|----------------------------------------------------------------------------------|---------------------|
| 14   |           | High-performance PCIe Gen5 GPU Accelerator, ~140GB memory class, passive cooling |                     |
| 15   |           | NDR 400Gb compatible optical transceiver module                                  |                     |
| 16   |           | x16 Cable Riser Slot (high power GPU support up to 600W)                         |                     |
| 17   |           | x16 Rear Riser Slot                                                              |                     |
| 18   |           | x16 Rear Direct Riser Slots                                                      |                     |
| 19   |           | 2700W 230V Titanium Hot-Swap Power Supply                                        |                     |
| 20   |           | 2.0m, 16A/100-250V, C19 to C20 Jumper Cord (India)                               |                     |
| 21   |           | 2U Ultra High Performance Fan Modules for high power PCIe devices                |                     |
| 22   |           | Long Travel Toolless Slide Rail Kit with Cable Management Arm                    |                     |
| 23   |           | Standard Rack Latch Mechanism                                                    |                     |
| 24   |           | TPM 2.0 with Secure Boot                                                         |                     |
| 25   |           | Enable IPMI-over-LAN                                                             |                     |
| 26   |           | Intrusion Switch Cable Kit                                                       |                     |
| 27   |           | 3 yr base warranty                                                               |                     |
| 28   |           | <b>Controller / Management</b>                                                   |                     |
| 29   |           | Server Management Controller Premium License                                     |                     |
| 30   |           | Controller Premium Feature Enablement (FOD)                                      |                     |
| 31   |           | <b>Management Software</b>                                                       |                     |
| 32   |           | Advanced Server Management Software, Per Endpoint w/5 Yr SW S&S                  |                     |
| 33   |           | Registration only                                                                |                     |
| 34   |           | Per Managed Endpoint w/5 Yr SW S&S                                               |                     |
| 35   |           | <b>Installation</b>                                                              |                     |
| 36   |           | Server Installation                                                              |                     |
| 37   |           | Hardware Installation (Business Hours)                                           |                     |
| 38   |           | <b>Add-On</b>                                                                    |                     |
| 39   |           | Server Keep Your Drive Add-On                                                    |                     |
| 40   |           | KYD                                                                              |                     |
| 41   |           | Duration 60 Months                                                               |                     |
| 42   |           | <b>Support</b>                                                                   |                     |
| 43   |           | Server Support 24X7 4HR RESP                                                     |                     |
| 44   |           | Premier Support                                                                  |                     |

| SNo. | Parameter        | Specifications                                                                   | Compliance (Yes/No) |
|------|------------------|----------------------------------------------------------------------------------|---------------------|
| 45   |                  | Duration 60 Months                                                               |                     |
| 46   |                  | 24x7 4hr Resp                                                                    |                     |
| 53.  | Data Lake Server |                                                                                  |                     |
| 1    |                  | 2U 2.5"/EDSFF 3.5 Chassis                                                        |                     |
| 2    |                  | General Computing - Power Efficiency                                             |                     |
| 3    |                  | Data Center Environment 25 Degree Celsius / 77 Degree Fahrenheit                 |                     |
| 4    |                  | 64C 350W 2.4GHz Processor                                                        |                     |
| 5    |                  | 2U Performance Heatsink                                                          |                     |
| 6    |                  | 64GB DDR5 6400MHz (2Rx4) RDIMM                                                   |                     |
| 7    |                  | Select Storage devices - no configured RAID required                             |                     |
| 8    |                  | RAID 16i 4GB Flash PCIe Gen4 12Gb Adapter                                        |                     |
| 9    |                  | 2.5" 3.84TB Read Intensive SATA 6Gb HS SSD SED                                   |                     |
| 10   |                  | 2.5" 1.92TB Read Intensive SATA 6Gb HS SSD SED                                   |                     |
| 11   |                  | 2U 8x2.5" SAS/SATA Backplane                                                     |                     |
| 12   |                  | 10GBASE-T 2-port OCP Ethernet Adapter                                            |                     |
| 13   |                  | High-speed PCIe Gen5 VPI Adapter (NDR 400Gb class, OSFP, single port)            |                     |
| 14   |                  | High-performance PCIe Gen5 GPU Accelerator, ~140GB memory class, passive cooling |                     |
| 15   |                  | NDR 400Gb compatible optical transceiver module                                  |                     |
| 16   |                  | x16 Cable Riser Slot (high power GPU support up to 600W)                         |                     |
| 17   |                  | x16 Rear Riser Slot                                                              |                     |
| 18   |                  | x16 Rear Direct Riser Slots                                                      |                     |
| 19   |                  | 2700W 230V Titanium Hot-Swap Power Supply                                        |                     |
| 20   |                  | 2.0m, 16A/100-250V, C19 to C20 Jumper Cord (India)                               |                     |
| 21   |                  | 2U Ultra High Performance Fan Modules for high power PCIe devices                |                     |
| 22   |                  | Long Travel Toolless Slide Rail Kit with Cable Management Arm                    |                     |
| 23   |                  | Standard Rack Latch Mechanism                                                    |                     |
| 24   |                  | TPM 2.0 with Secure Boot                                                         |                     |
| 25   |                  | Enable IPMI-over-LAN                                                             |                     |
| 26   |                  | Intrusion Switch Cable Kit                                                       |                     |
| 27   |                  | 3 yr base warranty                                                               |                     |

| SNo. | Parameter                 | Specifications                                                   | Compliance (Yes/No) |
|------|---------------------------|------------------------------------------------------------------|---------------------|
| 28   |                           | Controller / Management                                          |                     |
| 29   |                           | Server Management Controller Premium License                     |                     |
| 30   |                           | Controller Premium Feature Enablement (FOD)                      |                     |
| 31   |                           | Management Software                                              |                     |
| 32   |                           | Advanced Server Management Software, Per Endpoint w/5 Yr SW S&S  |                     |
| 33   |                           | Registration only                                                |                     |
| 34   |                           | Per Managed Endpoint w/5 Yr SW S&S                               |                     |
| 35   |                           | Installation                                                     |                     |
| 36   |                           | Server Installation                                              |                     |
| 37   |                           | Hardware Installation (Business Hours)                           |                     |
| 38   |                           | Add-On                                                           |                     |
| 39   |                           | Server Keep Your Drive Add-On                                    |                     |
| 40   |                           | KYD                                                              |                     |
| 41   |                           | Duration 60 Months                                               |                     |
| 42   |                           | Support                                                          |                     |
| 43   |                           | Server Support 24X7 4HR RESP                                     |                     |
| 44   |                           | Premier Support                                                  |                     |
| 45   |                           | Duration 60 Months                                               |                     |
| 46   |                           | 24x7 4hr Resp                                                    |                     |
| 54.  | Digital Twin & GIS Server |                                                                  |                     |
| 1    |                           | 2U 2.5"/EDSFF 3.5 Chassis                                        |                     |
| 2    |                           | General Computing - Power Efficiency                             |                     |
| 3    |                           | Data Center Environment 25 Degree Celsius / 77 Degree Fahrenheit |                     |
| 4    |                           | 64C 350W 2.4GHz Processor                                        |                     |
| 5    |                           | 2U Performance Heatsink                                          |                     |
| 6    |                           | 64GB DDR5 6400MHz (2Rx4) RDIMM                                   |                     |
| 7    |                           | Select Storage devices - no configured RAID required             |                     |
| 8    |                           | RAID 16i 4GB Flash PCIe Gen4 12Gb Adapter                        |                     |
| 9    |                           | 2.5" 3.84TB Read Intensive SATA 6Gb HS SSD SED                   |                     |
| 10   |                           | 2.5" 1.92TB Read Intensive SATA 6Gb HS SSD SED                   |                     |
| 11   |                           | 2U 8x2.5" SAS/SATA Backplane                                     |                     |
| 12   |                           | 10GBASE-T 2-port OCP Ethernet Adapter                            |                     |

| SNo. | Parameter | Specifications                                                                   | Compliance (Yes/No) |
|------|-----------|----------------------------------------------------------------------------------|---------------------|
| 13   |           | High-speed PCIe Gen5 VPI Adapter (NDR 400Gb class, OSFP, single port)            |                     |
| 14   |           | High-performance PCIe Gen5 GPU Accelerator, ~140GB memory class, passive cooling |                     |
| 15   |           | NDR 400Gb compatible optical transceiver module                                  |                     |
| 16   |           | x16 Cable Riser Slot (high power GPU support up to 600W)                         |                     |
| 17   |           | x16 Rear Riser Slot                                                              |                     |
| 18   |           | x16 Rear Direct Riser Slots                                                      |                     |
| 19   |           | 2700W 230V Titanium Hot-Swap Power Supply                                        |                     |
| 20   |           | 2.0m, 16A/100-250V, C19 to C20 Jumper Cord (India)                               |                     |
| 21   |           | 2U Ultra High Performance Fan Modules for high power PCIe devices                |                     |
| 22   |           | Long Travel Toolless Slide Rail Kit with Cable Management Arm                    |                     |
| 23   |           | Standard Rack Latch Mechanism                                                    |                     |
| 24   |           | TPM 2.0 with Secure Boot                                                         |                     |
| 25   |           | Enable IPMI-over-LAN                                                             |                     |
| 26   |           | Intrusion Switch Cable Kit                                                       |                     |
| 27   |           | 3 yr base warranty                                                               |                     |
| 28   |           | Controller / Management                                                          |                     |
| 29   |           | Server Management Controller Premium License                                     |                     |
| 30   |           | Controller Premium Feature Enablement (FOD)                                      |                     |
| 31   |           | Management Software                                                              |                     |
| 32   |           | Advanced Server Management Software, Per Endpoint w/5 Yr SW S&S                  |                     |
| 33   |           | Registration only                                                                |                     |
| 34   |           | Per Managed Endpoint w/5 Yr SW S&S                                               |                     |
| 35   |           | Installation                                                                     |                     |
| 36   |           | Server Installation                                                              |                     |
| 37   |           | Hardware Installation (Business Hours)                                           |                     |
| 38   |           | Add-On                                                                           |                     |
| 39   |           | Server Keep Your Drive Add-On                                                    |                     |
| 40   |           | KYD                                                                              |                     |
| 41   |           | Duration 60 Months                                                               |                     |
| 42   |           | Support                                                                          |                     |

| SNo.       | Parameter                   | Specifications                                                                   | Compliance (Yes/No) |
|------------|-----------------------------|----------------------------------------------------------------------------------|---------------------|
| 43         |                             | Server Support 24X7 4HR RESP                                                     |                     |
| 44         |                             | Premier Support                                                                  |                     |
| 45         |                             | Duration 60 Months                                                               |                     |
| 46         |                             | 24x7 4hr Resp                                                                    |                     |
| <b>55.</b> | <b>PA System ECB Server</b> |                                                                                  |                     |
| 1          |                             | 2U 2.5"/EDSFF 3.5 Chassis                                                        |                     |
| 2          |                             | General Computing - Power Efficiency                                             |                     |
| 3          |                             | Data Center Environment 25 Degree Celsius / 77 Degree Fahrenheit                 |                     |
| 4          |                             | 64C 350W 2.4GHz Processor                                                        |                     |
| 5          |                             | 2U Performance Heatsink                                                          |                     |
| 6          |                             | 64GB DDR5 6400MHz (2Rx4) RDIMM                                                   |                     |
| 7          |                             | Select Storage devices - no configured RAID required                             |                     |
| 8          |                             | RAID 16i 4GB Flash PCIe Gen4 12Gb Adapter                                        |                     |
| 9          |                             | 2.5" 3.84TB Read Intensive SATA 6Gb HS SSD SED                                   |                     |
| 10         |                             | 2.5" 1.92TB Read Intensive SATA 6Gb HS SSD SED                                   |                     |
| 11         |                             | 2U 8x2.5" SAS/SATA Backplane                                                     |                     |
| 12         |                             | 10GBASE-T 2-port OCP Ethernet Adapter                                            |                     |
| 13         |                             | High-speed PCIe Gen5 VPI Adapter (NDR 400Gb class, OSFP, single port)            |                     |
| 14         |                             | High-performance PCIe Gen5 GPU Accelerator, ~140GB memory class, passive cooling |                     |
| 15         |                             | NDR 400Gb compatible optical transceiver module                                  |                     |
| 16         |                             | x16 Cable Riser Slot (high power GPU support up to 600W)                         |                     |
| 17         |                             | x16 Rear Riser Slot                                                              |                     |
| 18         |                             | x16 Rear Direct Riser Slots                                                      |                     |
| 19         |                             | 2700W 230V Titanium Hot-Swap Power Supply                                        |                     |
| 20         |                             | 2.0m, 16A/100-250V, C19 to C20 Jumper Cord (India)                               |                     |
| 21         |                             | 2U Ultra High Performance Fan Modules for high power PCIe devices                |                     |
| 22         |                             | Long Travel Toolless Slide Rail Kit with Cable Management Arm                    |                     |
| 23         |                             | Standard Rack Latch Mechanism                                                    |                     |
| 24         |                             | TPM 2.0 with Secure Boot                                                         |                     |
| 25         |                             | Enable IPMI-over-LAN                                                             |                     |

| SNo.       | Parameter          | Specifications                                                  | Compliance (Yes/No) |
|------------|--------------------|-----------------------------------------------------------------|---------------------|
| 26         |                    | Intrusion Switch Cable Kit                                      |                     |
| 27         |                    | 3 yr base warranty                                              |                     |
| 28         |                    | Controller / Management                                         |                     |
| 29         |                    | Server Management Controller Premium License                    |                     |
| 30         |                    | Controller Premium Feature Enablement (FOD)                     |                     |
| 31         |                    | Management Software                                             |                     |
| 32         |                    | Advanced Server Management Software, Per Endpoint w/5 Yr SW S&S |                     |
| 33         |                    | Registration only                                               |                     |
| 34         |                    | Per Managed Endpoint w/5 Yr SW S&S                              |                     |
| 35         |                    | Installation                                                    |                     |
| 36         |                    | Server Installation                                             |                     |
| 37         |                    | Hardware Installation (Business Hours)                          |                     |
| 38         |                    | Add-On                                                          |                     |
| 39         |                    | Server Keep Your Drive Add-On                                   |                     |
| 40         |                    | KYD                                                             |                     |
| 41         |                    | Duration 60 Months                                              |                     |
| 42         |                    | Support                                                         |                     |
| 43         |                    | Server Support 24X7 4HR RESP                                    |                     |
| 44         |                    | Premier Support                                                 |                     |
| 45         |                    | Duration 60 Months                                              |                     |
| 46         |                    | 24x7 4hr Resp                                                   |                     |
| <b>56.</b> | <b>ITMS Server</b> |                                                                 |                     |
| 1          |                    | 2U Hybrid Storage Array Chassis                                 |                     |
| 2          |                    | Enterprise Hybrid Storage Architecture                          |                     |
| 3          |                    | Dual Controller Redundant Architecture                          |                     |
| 4          |                    | High Availability Active-Active Controllers                     |                     |
| 5          |                    | Intel Enterprise Storage Processors                             |                     |
| 6          |                    | System Memory with ECC Protection                               |                     |
| 7          |                    | RAID-DP / RAID-TEC Data Protection                              |                     |
| 8          |                    | SSD + NL-SAS/SATA Hybrid Storage Support                        |                     |
| 9          |                    | 2.5"/3.5" Drive Support                                         |                     |
| 10         |                    | SSD Tiering Support                                             |                     |
| 11         |                    | Hybrid Flash Optimized Storage                                  |                     |
| 12         |                    | 10GbE Network Connectivity                                      |                     |

| SNo. | Parameter       | Specifications                                                   | Compliance (Yes/No) |
|------|-----------------|------------------------------------------------------------------|---------------------|
| 13   |                 | 25GbE / 40GbE / 100GbE Expansion Support                         |                     |
| 14   |                 | FC/iSCSI/NFS/SMB Protocol Support                                |                     |
| 15   |                 | Snapshot Technology                                              |                     |
| 57.  | Database Server |                                                                  |                     |
| 1    |                 | 2U 12x3.5" Chassis                                               |                     |
| 2    |                 | General Computing - Power Efficiency                             |                     |
| 3    |                 | Data Center Environment 30 Degree Celsius / 86 Degree Fahrenheit |                     |
| 4    |                 | 32C 225W 2.3GHz Processor                                        |                     |
| 5    |                 | 2U Performance Heatsink                                          |                     |
| 6    |                 | 32GB DDR5 6400MHz (2Rx8) RDIMM                                   |                     |
| 7    |                 | Select Storage devices - no configured RAID required             |                     |
| 8    |                 | RAID 16i 4GB Flash PCIe Gen4 12Gb Adapter                        |                     |
| 9    |                 | 3.5" 20TB 7.2K SATA 6Gb Hot Swap 512e HDD                        |                     |
| 10   |                 | 2U 12x3.5" SAS/SATA Backplane                                    |                     |
| 11   |                 | M.2 RAID SATA/NVMe Enablement Kit                                |                     |
| 12   |                 | M.2 480GB Read Intensive NVMe SSD                                |                     |
| 13   |                 | 10GBASE-T 2-port Ethernet Adapter                                |                     |
| 14   |                 | x16 Rear Direct PCIe Riser Slot                                  |                     |
| 15   |                 | 1300W 230V/115V Titanium Hot-Swap Power Supply                   |                     |
| 16   |                 | 2.8m, 10A/100-250V, C13 to C14 Jumper Cord (India)               |                     |
| 17   |                 | 2U High Performance Fan Module                                   |                     |
| 18   |                 | Toolless Slide Rail Kit                                          |                     |
| 19   |                 | 2U EIA Latch Standard                                            |                     |
| 20   |                 | TPM 2.0 with Secure Boot                                         |                     |
| 21   |                 | Enable IPMI-over-LAN                                             |                     |
| 22   |                 | 2U Security Bezel                                                |                     |
| 23   |                 | Intrusion Switch Cable Kit                                       |                     |
| 24   |                 | 3yr Base Warranty                                                |                     |
| 25   |                 | Controller / Management                                          |                     |
| 26   |                 | Server Management Controller Premium License                     |                     |
| 27   |                 | Controller Premium Feature Enablement (FOD)                      |                     |
| 28   |                 | Operating System & Licensing                                     |                     |

| SNo.       | Parameter          | Specifications                                                                      | Compliance (Yes/No) |
|------------|--------------------|-------------------------------------------------------------------------------------|---------------------|
| 29         |                    | Windows Server 2025 Addl Lic                                                        |                     |
| 30         |                    | Windows Server 2025 Standard Additional License (16 core) (No Media/Key) (POS Only) |                     |
| 31         |                    | Windows Server 2025                                                                 |                     |
| 32         |                    | Windows Server 2025 Standard (16 core) - MultiLang (not preinstalled)               |                     |
| 33         |                    | Registration only                                                                   |                     |
| 34         |                    | Win Svr Standard 2025 to 2022 Downgrade Kit- Multilanguage                          |                     |
| 35         |                    | Drop-in-the-Box                                                                     |                     |
| 36         |                    | Additional Licensing                                                                |                     |
| 37         |                    | Windows Server 2025 Standard Additional License (16 core) (No Media/Key) (POS Only) |                     |
| 38         |                    | Win Svr Standard 2025 to 2022 Downgrade Kit- Multilanguage                          |                     |
| 39         |                    | Windows Server 2025 Standard (16 core) - MultiLang (not preinstalled)               |                     |
| 40         |                    | Management Software                                                                 |                     |
| 41         |                    | Server Management Software, Per Endpoint w/5 Yr SW S&S                              |                     |
| 42         |                    | Registration only                                                                   |                     |
| 43         |                    | Per Managed Endpoint w/5 Yr SW S&S                                                  |                     |
| 44         |                    | Support                                                                             |                     |
| 45         |                    | Server Support 24X7 4HR RESP                                                        |                     |
| 46         |                    | Premier Support                                                                     |                     |
| 47         |                    | Duration 60 Months                                                                  |                     |
| 48         |                    | 24x7 4hr Resp                                                                       |                     |
| 49         |                    | Installation                                                                        |                     |
| 50         |                    | Server Installation                                                                 |                     |
| 51         |                    | Hardware Installation (Business Hours)                                              |                     |
| 52         |                    | Add-On                                                                              |                     |
| 53         |                    | Server Keep Your Drive Add-On                                                       |                     |
| 54         |                    | KYD                                                                                 |                     |
| 55         |                    | Duration 60 Months                                                                  |                     |
| <b>58.</b> | <b>SAN Storage</b> |                                                                                     |                     |
| 1          |                    | 2U 2.5"/EDSFF 3.5 Chassis                                                           |                     |
| 2          |                    | General Computing - Power Efficiency                                                |                     |



| SNo. | Parameter   | Specifications                                                                   | Compliance (Yes/No) |
|------|-------------|----------------------------------------------------------------------------------|---------------------|
| 3    |             | Data Center Environment 25 Degree Celsius / 77 Degree Fahrenheit                 |                     |
| 4    |             | 64C 350W 2.4GHz Processor                                                        |                     |
| 5    |             | 2U Performance Heatsink                                                          |                     |
| 6    |             | 64GB DDR5 6400MHz (2Rx4) RDIMM                                                   |                     |
| 7    |             | Select Storage devices - no configured RAID required                             |                     |
| 8    |             | RAID 16i 4GB Flash PCIe Gen4 12Gb Adapter                                        |                     |
| 9    |             | 2.5" 3.84TB Read Intensive SATA 6Gb HS SSD SED                                   |                     |
| 10   |             | 2.5" 1.92TB Read Intensive SATA 6Gb HS SSD SED                                   |                     |
| 11   |             | 2U 8x2.5" SAS/SATA Backplane                                                     |                     |
| 12   |             | 10GBASE-T 2-port OCP Ethernet Adapter                                            |                     |
| 13   |             | High-speed PCIe Gen5 VPI Adapter (NDR 400Gb class, OSFP, single port)            |                     |
| 14   |             | High-performance PCIe Gen5 GPU Accelerator, ~140GB memory class, passive cooling |                     |
| 15   |             | NDR 400Gb compatible optical transceiver module                                  |                     |
| 16   |             | x16 Cable Riser Slot (high power GPU support up to 600W)                         |                     |
| 17   |             | x16 Rear Riser Slot                                                              |                     |
| 18   |             | x16 Rear Direct Riser Slots                                                      |                     |
| 19   |             | 2700W 230V Titanium Hot-Swap Power Supply                                        |                     |
| 20   |             | 2.0m, 16A/100-250V, C19 to C20 Jumper Cord (India)                               |                     |
| 21   |             | 2U Ultra High Performance Fan Modules for high power PCIe devices                |                     |
| 22   |             | Long Travel Toolless Slide Rail Kit with Cable Management Arm                    |                     |
| 23   |             | Standard Rack Latch Mechanism                                                    |                     |
| 24   |             | TPM 2.0 with Secure Boot                                                         |                     |
| 25   |             | Enable IPMI-over-LAN                                                             |                     |
| 26   |             | Intrusion Switch Cable Kit                                                       |                     |
| 27   |             | 3 yr base warranty                                                               |                     |
| 28   |             | Controller / Management                                                          |                     |
| 29   |             | Server Management Controller Premium License                                     |                     |
| 59.  | NAS Storage |                                                                                  |                     |
| 1    |             | 2U Hybrid Storage Array Chassis                                                  |                     |
| 2    |             | Enterprise Hybrid Storage Architecture                                           |                     |

| SNo. | Parameter | Specifications                              | Compliance (Yes/No) |
|------|-----------|---------------------------------------------|---------------------|
| 3    |           | Dual Controller Redundant Architecture      |                     |
| 4    |           | High Availability Active-Active Controllers |                     |
| 5    |           | Intel Enterprise Storage Processors         |                     |
| 6    |           | System Memory with ECC Protection           |                     |
| 7    |           | RAID-DP / RAID-TEC Data Protection          |                     |
| 8    |           | SSD + NL-SAS/SATA Hybrid Storage Support    |                     |
| 9    |           | 2.5"/3.5" Drive Support                     |                     |
| 10   |           | SSD Tiering Support                         |                     |
| 11   |           | Hybrid Flash Optimized Storage              |                     |
| 12   |           | 10GbE Network Connectivity                  |                     |
| 13   |           | 25GbE / 40GbE / 100GbE Expansion Support    |                     |
| 14   |           | FC/iSCSI/NFS/SMB Protocol Support           |                     |
| 15   |           | Snapshot Technology                         |                     |
| 16   |           | Thin Provisioning                           |                     |
| 17   |           | Deduplication and Compression               |                     |
| 18   |           | Encryption at Rest                          |                     |
| 19   |           | Hot-Swap Redundant Power Supply             |                     |
| 20   |           | Rack Mount Rail Kit                         |                     |
| 21   |           | Redundant Cooling Fans                      |                     |
| 22   |           | Cable Management Support                    |                     |
| 23   |           | Enterprise Rack Deployment                  |                     |
| 24   |           | TPM / Secure Management Features            |                     |
| 25   |           | Remote Management Support                   |                     |
| 26   |           | Intrusion / Security Protection             |                     |
| 27   |           | 3 Year Base Warranty                        |                     |
| 28   |           | Storage Controller Management               |                     |
| 29   |           | Advanced Storage Management License         |                     |
| 30   |           | Premium Feature Enablement                  |                     |
| 31   |           | Centralized Storage Management Software     |                     |
| 32   |           | Advanced Monitoring & Reporting             |                     |
| 33   |           | Registration and Licensing                  |                     |
| 34   |           | Subscription & Software Support             |                     |
| 35   |           | Installation Services                       |                     |
| 36   |           | Storage Installation                        |                     |
| 37   |           | Hardware Installation (Business Hours)      |                     |





| SNo. | Parameter | Specifications                                                                                                                                                           | Compliance (Yes/No) |
|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 7    |           | The proposed backup solution shall also support NAS backup                                                                                                               |                     |
| 8    |           | The proposed backup software should give the option to allow de duplication to be done either on the Application Server or on the Backup Server or at the Target Device. |                     |
| 9    |           | The backup software should support backup to cloud. Vendor Cloud or any 3rd party cloud like AWS, Azure, Google etc..                                                    |                     |
| 10   |           | The proposed backup solution shall support synthetic full backup / Virtual full backups.                                                                                 |                     |
| 11   |           | The proposed backup solution shall be able to copy data across firewall.                                                                                                 |                     |
| 12   |           | The proposed backup solution shall support for write protect or restore protect on file level or folder level. etc                                                       |                     |
| 13   |           | The proposed backup solution shall support File and Folder level backup & restore feature                                                                                |                     |
| 14   |           | The proposed backup solution shall support file name or folder name or host name wise sort                                                                               |                     |
| 15   |           | The proposed backup solution must support at least AES 256-bit encryption capabilities. Encryption should be at both level like intransit and Storage                    |                     |
| 16   |           | The proposed backup solution should have blockchain technology for files authentication. If files gets changed by anyone that should be trackable.                       |                     |
| 17   |           | The backup software should support missed job execution                                                                                                                  |                     |
| 18   |           | The Backup software should be able to recover only critical volumes and later restore other volumes that were backed up in separate sessions.                            |                     |
| 19   |           | The backup software should support the Cold replication functionality                                                                                                    |                     |
| 20   |           | The proposed backup solution must support monitoring & reporting methods while backing up and restoring                                                                  |                     |
| 21   |           | The proposed solution must work in backup from Physical image to Virtual image or vice versa                                                                             |                     |
| 22   |           | The proposed solution must work with both AD and workgroup systems for client backups                                                                                    |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                        | Compliance (Yes/No) |
|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 23   |           | Compressed mechanism for security like 128bit or mentioned if any other                                                                                                                                                                                                                               |                     |
| 24   |           | The proposed solution must work with Backup policies pertaining to retention period definition as per organization policies                                                                                                                                                                           |                     |
| 25   |           | The proposed solution should have inbuilt Anti Ransomware protection for live system as well as backed up data and map drive for endpoints. Also, it should be capable to revert back any ransomware infected file to original stage                                                                  |                     |
| 26   |           | The proposed solution should have inbuilt Crypto mining protection for live system.                                                                                                                                                                                                                   |                     |
| 27   |           | Proposed solution should have Secure backup data replication with variable-length encryption at the source, along with compression and encryption to ensure that backups are optimized for WAN transmission. This should be ensured without need of any other 3rd party WAN Accelerator requirements. |                     |
| 28   |           | The proposed solution should not replicate entire storage or backed up data. It should have provision to select specific date for off host backup processing.                                                                                                                                         |                     |

#### Group-9: Video Management, Analytics & AI Applications

| SNo.       | Parameter                               | Specifications                                                                                                                                                                                                                                                                                             | Compliance (Yes/No) |
|------------|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| <b>62.</b> | <b>Video Management System (VMS)</b>    |                                                                                                                                                                                                                                                                                                            |                     |
| <b>1</b>   | <b>Minimum Technical Specifications</b> | Web client with single point of management for entire system. The VMS software should be supplied with perpetual licenses with lifetime free. Once sold it will be lifetime property of Customer Command Hospital. There should not be any surprise fees, no forced upgrades, no software renewal charges. |                     |
| <b>2</b>   |                                         | The open Platform Video Management Software (VMS) Application, should be a reputed brand in global market, should be from the same camera OEM & should support various third Party ONVIF IP Cameras, this is compulsorily required so that the same VMS Applications can be scaled up in future            |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Compliance (Yes/No) |
|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | by just adding third Party IP Cameras & additional Software Licenses.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                     |
| 3    |           | The VMS system shall be a scalable client – server architecture built using well known operating systems like Windows Server 2019/2022 Standard Edition. Microsoft Windows 2016, 2019 and 2022 64-bit Server.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
| 4    |           | The Intellectual Property Rights & Source Code of Offered Video Management Software must not reside in a country that is sharing Land Border with India. It should be in the same camera OEM name and OEM should be available with its own service support centre in India.                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     |
| 5    |           | The offered VMS platform should be as per Make In India Policy with local content of 50% more to compulsory qualify as Class-1 local supplier. The VMS software with 100% LC (designed, developed and manufactured and maintained with global support service centre availability in India) will be given preference.                                                                                                                                                                                                                                                                                                                                                                                                                     |                     |
| 6    |           | The IP CCTV System & Components OEM must confirm that Firmware shall be secured through Signed Digital certificates on all active devices including their updates. Firmware must be retained by OEM (Original Equipment Manufacturer) and, it's IPR. The IPR must reside either In India or shouldn't reside or belong to any of Its entity in restricted country as designated by GOI(I.e. China, Pakistan, Bangladesh, Bhutan etc). Must comply with 3rd party run PKI or certificates or encryption policy or SSL Certifications. The required necessary supporting documents are always required to keep with end user against of the above. The CCTV camera OEM must own Its own PGP PKI & Firmware Version & Details must be taken. |                     |
| 7    |           | Critical/Core components OEM should not have any requirements to have proprietary platforms and should conform to open standards. OEM must be free from Hi-Silicon Chipset; SOC/processor; coded firmware and PCBs should not be from restricted countries; countries sharing land border with India and including those companies or their subsidiaries                                                                                                                                                                                                                                                                                                                                                                                  |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Compliance (Yes/No) |
|------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | or group companies or parent company from restricted list of countries /companies. Necessary supporting documents with an undertaking must be submitted along with bid. Customer (.....) has all the rights to evaluate thoroughly, if found any violations in this regards the strict disciplinary actions will be taken against both system integrator and OEM of camera & VMS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                     |
| 8    |           | The active Component's OEMs I.e. of IP CCTV and Embedded NVR's/Servers should confirm of not using or procuring any such equipment's or processors or software patches or firmware or in SKD/CKD/ CSU/parts/spares from those or any blacklisted companies (or any subsidiary or affiliate or its 3rd party agencies or such backlisted or barred entities) or by any recognized global forum or Institutions in-view or reporting of suspicious activities of hacking/cyber-attacks/malwares/etc. to safeguard the public safety & security of Government facilities, physical security surveillance of critical infrastructure, and other national security purposes, including the scope of video surveillance system & components. A declaration cum undertaking must be submitted by OEM signed by competent authority (Director Level at OEM company) in this regard. Any false declaration can lead to Bid technical rejection. |                     |
| 9    |           | Command hospital has all the rights to ask any bidder(s) to demonstrate the complete system at Customer Command hospital, Kondhwa premises as per tender requirement with NO cost No commitment basis. The bidders' technical qualifications fully depends on demonstration qualifications.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                     |
| 10   |           | A Desktop Client solution shall be available for those users who prefer not to work in a browser environment.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                     |
| 11   |           | Configuration Sections of Application: Add, discover, configure and operate recording servers, application servers, web servers, as well as IP cameras and encoders (edge devices).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |



| SNo. | Parameter           | Specifications                                                                                                                                                                                                                                                          | Compliance (Yes/No) |
|------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 12   |                     | Full live digital video and audio surveillance over a standard 1 Gbps network.                                                                                                                                                                                          |                     |
| 13   |                     | The VMS shall support recording, playback and archiving of video in standard industry compression formats, including H.265, H.264, JPEG and M-JPEG.                                                                                                                     |                     |
| 14   |                     | True Open Standards (ONVIF) as Basis: Thin client architecture. Centrally licensed. COTS compatible software or available preloaded on a manufacturer certified application/web server or recording server.                                                             |                     |
| 15   |                     | Two License Tiers: Associated with number of edge devices and a specific feature set. Licensing shall be based on a per edge device basis                                                                                                                               |                     |
| 16   | Software Features   | Easy to Use Tabs: Access configuration screen and dashboard monitoring systems health. Monitoring Screen: Video display area with available resources list. Multiple Display Views: Configurable with variety layouts. Multiple Monitors: Supported.                    |                     |
| 17   | Live Video          |                                                                                                                                                                                                                                                                         |                     |
|      |                     | 1) Stream through Recording Server with auto fail over to cameras.                                                                                                                                                                                                      |                     |
|      |                     | 2) PTZ available from live video.                                                                                                                                                                                                                                       |                     |
|      |                     | 3) Presets and tours are configurable.                                                                                                                                                                                                                                  |                     |
|      |                     | 4) Digital zoom provided on video displays.                                                                                                                                                                                                                             |                     |
| 18   | Web Based Interface |                                                                                                                                                                                                                                                                         |                     |
|      |                     | 1) Access the VMS from any standard web browser enabled device.                                                                                                                                                                                                         |                     |
|      |                     | 2) Browser compatibility: Microsoft Edge. Chrome shall be able to be used with the VMS Chrome extension from the Chrome store.                                                                                                                                          |                     |
|      |                     | 3) Provide live viewing, playback and PTZ controls.                                                                                                                                                                                                                     |                     |
|      |                     | 4) Mobile App: Apple and Android smart phones and tablets. View live or recorded video. View concurrent multiple video streams; 4 on phones, 9 on tablets. Full control of PTZ, including presets. Quick and simple playback. Pinch to zoom on live and recorded video. |                     |
| 19   |                     | Export Icon: Easy access on display to save a video clip. Archived in MP4 format and authenticated in the player per the ONVIF spec.                                                                                                                                    |                     |
|      |                     | System should Support to export video of multiple cameras on multiple timelines                                                                                                                                                                                         |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                 | Compliance (Yes/No) |
|------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 20   |           | Playback: Supported from main screen without leaving live video viewing area. Clicking Playback from time icon will allow selecting the playback to start from a specific date and time using standard calendar tools.                                                                                                                                                                                         |                     |
| 21   |           | Software Delivery: Provided on manufacturer's website.                                                                                                                                                                                                                                                                                                                                                         |                     |
| 22   | Events:   | Setup in configuration area. Pre-Event Recording: Supported and with event notification.                                                                                                                                                                                                                                                                                                                       |                     |
| 23   |           | Access Control System Support: Accessed using a simple tab click. Interface opens in popup window that can be used in conjunction with the VMS.                                                                                                                                                                                                                                                                |                     |
| 24   |           | Enhanced Edge-based Analytics: Show bounding boxes around detected objects in live and playback video.                                                                                                                                                                                                                                                                                                         |                     |
| 25   |           | Authorization roles shall be configurable; these roles shall then be listed in the Resources list on the monitoring display screen. This Resources list can be viewed in a hierarchy view with these groups or as a flat list.                                                                                                                                                                                 |                     |
| 26   |           | Video Masking: Available centrally through the VMS. Allow users with the correct authority to unmask video as needed using icon on the display screen. Unmask feature available on live and playback video.                                                                                                                                                                                                    |                     |
| 27   |           | Quick Configuration Wizard: Streamlined process for typical and basic system setup with minimal input required.                                                                                                                                                                                                                                                                                                |                     |
| 28   |           | Search Functions: Six search functions available including museum search (supports AI classification for those cameras with that functionality), thumbnail search, events framework search, event/alarm search, audit log and Analytics Search. Additionally, the player shall support coloured bounding boxes with for the AI analytics, person (green box), vehicle (cyan/blue box) and animal (yellow box). |                     |
| 29   |           | Capability for 360-degree lens de-warp available for use with cameras with fisheye lenses.                                                                                                                                                                                                                                                                                                                     |                     |
| 30   |           | Integration with Active Directory (AD): Allow user management via the AD.                                                                                                                                                                                                                                                                                                                                      |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Compliance (Yes/No) |
|------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 31   |           | Override mode: Allows operating in case AD communication is lost.                                                                                                                                                                                                                                                                                                                                                                                                                 |                     |
| 32   |           | Import user list: A user list can be prepared in advance in standard Excel sheet saved in .csv format and imported into VMS.                                                                                                                                                                                                                                                                                                                                                      |                     |
| 33   |           | Auto Archive: Archiving can be set up to occur on a schedule, for either all data or only events-based recording, to local or network/cloud storage.                                                                                                                                                                                                                                                                                                                              |                     |
| 34   |           | Multi-language Support: All text in the user interface translated to selected language.                                                                                                                                                                                                                                                                                                                                                                                           |                     |
| 35   |           | Backup and restore for system settings shall be available. Backup can be to a network drive or cloud storage.                                                                                                                                                                                                                                                                                                                                                                     |                     |
| 36   |           | Keypads and PLC controls supported. Numeric IDs for devices configurable for use with controls. These devices shall be able to control remote monitors.                                                                                                                                                                                                                                                                                                                           |                     |
| 37   |           | Central Software Upgrade Interface: Provides the ability to upgrade the entire system by pushing the upgrade from the Application Server to all devices on the system.                                                                                                                                                                                                                                                                                                            |                     |
| 38   |           | System supports IPv4/IPv6 and HTTPS. There shall be HTTPS support for External Events.                                                                                                                                                                                                                                                                                                                                                                                            |                     |
| 39   |           | The system shall have built in Log Collection from all system PCs, making it easier to troubleshoot problems. An advanced tool shall be provided.                                                                                                                                                                                                                                                                                                                                 |                     |
| 40   |           | The system shall accept external text strings from third party systems.                                                                                                                                                                                                                                                                                                                                                                                                           |                     |
| 41   |           | Alarm notification shall be both visual and audible. The display of the alarm tab view can be auto dismissed after a set time and return to the previous view; the alarm tab view can still be accessed as needed. Live view from up to four cameras shall be able to display in the alarm tab. Multiple alarms (external events only) shall be able to be imported in a single action using an Excel sheet template. A Test Email button shall be provided within the interface. |                     |
| 42   |           | A Report button shall generate an Excel or HTML report of the devices sorted by their hosting recording servers or a flat list.                                                                                                                                                                                                                                                                                                                                                   |                     |
| 43   |           | Devices shall be able to be replaced or moved, for load balancing purposes.                                                                                                                                                                                                                                                                                                                                                                                                       |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                    | Compliance (Yes/No) |
|------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 44   |           | Storage of video and exports can be mapped to another server, a NAS on the network or to the cloud (AWS/Wasabi).                                                                                                                  |                     |
| 45   |           | A Server Failover unit shall be able to be configured to take over in the event of an server failure.                                                                                                                             |                     |
| 46   |           | A Mapping function shall be provided that allows the placement of resource devices on any imported map. The map shall be either a static or live map. The device icons on the map shall be adjustable in size.                    |                     |
| 47   |           | An Events Database shall exist to store any event that occurs in the system. From the Event Search screen, a query shall be able to be created to search for any event that occurs on the system from any resource in the system. |                     |
| 48   |           | A video clip, either in live or playback, shall be able to be bookmarked for easy referral.                                                                                                                                       |                     |
| 49   |           | The ability to use mobile devices as mobile cameras shall be available. The mobile device shall be able to receive event alerts.                                                                                                  |                     |
| 50   |           | The VMS shall be able to accept partner systems through an integration framework. These partner resources will show on the Resources list and can display in a tile.                                                              |                     |
| 51   |           | A Snapshot function shall be provided to capture video from live or playback; this snapshot shall be able to be saved. It shall be possible to capture snapshots from all resources and update them all at the same time.         |                     |
| 52   |           | An Audit Log shall be available to track every user's actions.                                                                                                                                                                    |                     |
| 53   |           | Keypads/PLC shall have the ability to call up other remote monitors.                                                                                                                                                              |                     |
| 54   |           | Shall be operational in a virtual environment.                                                                                                                                                                                    |                     |
| 55   |           | An integration framework shall be provided to allow partnerships with third party systems such as LPR and Access Control.                                                                                                         |                     |
| 56   |           | An Alarms Management module shall be provided that shall allow events to be defined as alarms and provide tools to review open alarms and close them. Alarms shall have a defined life cycle and                                  |                     |

| SNo. | Parameter     | Specifications                                                                                                                                                                                                                                                                                                                                                                                          | Compliance (Yes/No) |
|------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |               | procedures shall be able to be created to handle these alarms, if needed.                                                                                                                                                                                                                                                                                                                               |                     |
| 57   |               | A Client Performance Indicator shall be provided to indicate system performance as more cameras are added and displayed.                                                                                                                                                                                                                                                                                |                     |
| 58   |               | Monitors can be managed from the Application Server in a central way and a monitor can be defined as an alarm monitor for use by the alarms/rules in the system. Monitor IDs can be synced.                                                                                                                                                                                                             |                     |
| 59   |               | Virtual Matrix Display Controller (VMDC) feature shall be available for user to take control of any client workstation on the same network. User shall be able to view and display video on those remote monitors.                                                                                                                                                                                      |                     |
| 60   |               | The system shall have an enhanced dashboard that shall present the system's health status and provide health monitoring information and statistics on all connected devices, including Application Server, recording servers and cameras. It shall provide notifications that provide cyber security and an easy-to-use activity mapping chart.                                                         |                     |
| 61   |               | Multi-User Authorization Login Application. Offers levels of authorization based on functions.                                                                                                                                                                                                                                                                                                          |                     |
| 62   | Setup Utility | Allows Administrator to configure additional users as well as user groups.                                                                                                                                                                                                                                                                                                                              |                     |
|      |               | 1) User authorization: Configurable for specific system operations. Authorization Permission Setup: Performed using the User screen.                                                                                                                                                                                                                                                                    |                     |
|      |               | 2) Authorization Roles: Available to configure from the Authorization Roles screen. Permissions: Provide authority to perform all system functions.                                                                                                                                                                                                                                                     |                     |
|      |               | 3) Users and groups on AD servers may be imported and become a group in the VMS.                                                                                                                                                                                                                                                                                                                        |                     |
|      |               | 4) The software shall offer a full multi-user authorization process as follows: Authorization Roles: Created once globally. Authorized and given specific permissions. Users: Created once globally and may be given rights to groups. No virtual limit on number of groups and users authorized in the software. Authorization Roles to be authorized or denied access to: Monitoring screen for video |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Compliance (Yes/No) |
|------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | display. Configuration. Dashboard. Video and audio (media) export. Override masking. Override View.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     |
| 63   |           | A user, given appropriate access, may remotely configure components connected to the network. An access list shall be able to be created to add those PCs that are allowed to connect to VMS, adding another layer of security.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| 65   |           | Software permits viewing of live video from any edge device connected to any recording server on the network.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                     |
| 66   |           | Export Icon: Simplifies process of exporting video and creating archives and saving video to media, such as: USBs, CD, DVDs or solid-state drives. An embedded player shall be optional with each exported/archived video clip for playback on any machine if configured to do so.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                     |
| 67   |           | Event Rules: Create rules triggered by an event occurrence. Define actions executed for a given event. Events are selectable. Rules are configurable after an event is selected.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| 68   |           | Event Association: Multiple devices may be associated with an event. Actions Triggered by Event: Configurable as On and Off. Display live video. Display a view. Go to a preset. Operate a relay. Run a PTZ tour. Run a view tour. Start a URL. Delay function.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| 69   |           | Scheduled Recordings: Applies to cameras, encoders and microphones. Scheduling is based on rules configurable for actions the system takes upon an event. Schedules accessible on recording tab in device configuration. Create and Schedule Recordings: By authorized users. How often schedules repeat; weekly, monthly, yearly or never. Determines how the systems prioritizes schedules if schedule times overlap. Schedules available when configuring recording and rules, saving the need to create multiple and duplicate schedules. Sequencing cameras, including multi-screen displays. Record cameras at different qualities and frame rates from any recorder on the network. Schedule shall allow running preconfigured combinations of camera, sensor and PTZ programmed routines. |                     |

| SNo. | Parameter     | Specifications                                                                                                                                                                                                                                                                                                                              | Compliance (Yes/No) |
|------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 70   |               | System Components: Application/Web Server: Act as main system server; Windows based. Global configuration of the system is stored on this server. Recording Servers: Windows based providing communication, live streaming, recording, video playback and audio from cameras and encoders.                                                  |                     |
| 71   |               | Device Configuration: Valid devices to be configurable for system recognition and operation. Cameras fixed or with integrated PTZ. Microphones. Encoders. Sensors. Relays.                                                                                                                                                                  |                     |
| 72   |               | Authentication: Video from cameras is enabled to verify the authentication of the video and present an authentication symbol on the displayed video for recorded playback through the player when enabled only on export.                                                                                                                   |                     |
| 73   |               | User Friendly Tabs: Allow monitoring of live and playback video, and configuration of the system.                                                                                                                                                                                                                                           |                     |
| 74   |               | Login Window: Consists of Username and Password fields. Default Username and Password: Available for initial login. Configurable for increased security; there shall be an option to enforce a complex password.                                                                                                                            |                     |
| 75   |               | Serve operators, supervisors and system administrators.                                                                                                                                                                                                                                                                                     |                     |
| 76   | Setup Utility | Monitoring Display Screen:                                                                                                                                                                                                                                                                                                                  |                     |
|      |               | 1) Selection of number of tiles to display.                                                                                                                                                                                                                                                                                                 |                     |
|      |               | 2) Resource list of devices in system. Viewable as flat list or hierarchical list based on user configured groups. Resources include names of devices and icons depicting devices. Video Channels (cameras) connected, differentiating between PTZ and fixed cameras. Audio Channels (microphones). Views. Tours. Web Pages. Relay Outputs. |                     |
|      |               | 3) Display Area: Offers display configurations up to 36 tiles. Full screen View: Available. More views added by clicking the plus sign to create new view tabs while not losing the default view. Controls: Change the layout. Stop all displays. Export. Synchronize playback. Control current selected tab.                               |                     |
|      |               | 4) Camera Controls: Display at top of a tile when mouse hovers and may be locked in place. Playback.                                                                                                                                                                                                                                        |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                      | Compliance (Yes/No) |
|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | PTZ control. Digital zoom. Unmask. Export. Configuration settings                                                                                                                                                                                                                                                                                                                   |                     |
|      |           | 5) Playback controls: Visible when cameras go to playback. Looping a video section. Slow mode. Play from time. Rewind, fast rewind, pause, forward, and fast forward. Back to live video and current time.                                                                                                                                                                          |                     |
|      |           | 6) Access to all available programming menus.                                                                                                                                                                                                                                                                                                                                       |                     |
|      |           | 7) Viewing live devices is performed by dragging a device to any tile. Audio devices display in a smaller area below the video tiles.                                                                                                                                                                                                                                               |                     |
| 77   |           | Dashboard, Search, Alarms and Configuration Menu Access: Clicking a tab at the top of the screen.                                                                                                                                                                                                                                                                                   |                     |
| 78   |           | Access Control Systems: Available for integration.                                                                                                                                                                                                                                                                                                                                  |                     |
|      |           | 1) Meet requirements of business and government access control systems.                                                                                                                                                                                                                                                                                                             |                     |
|      |           | 2) Monitor and control facility access as well as video detection, temperature and communications loss monitoring.                                                                                                                                                                                                                                                                  |                     |
|      |           | 3) Provide control and access to users on Local Area Networks (LAN), Wide Area Networks (WAN), wireless networks and the Internet.                                                                                                                                                                                                                                                  |                     |
|      |           | 4) Video viewing playback and PTZ control from the VMS.                                                                                                                                                                                                                                                                                                                             |                     |
| 79   |           | A method to add partner systems shall be provided through an integration framework. It shall support access control software Access Control, LPR, software LPR and Thermal Radar sensor.                                                                                                                                                                                            |                     |
|      |           | 1) When integrating with the access control software Access Control System, digital inputs, relay outputs and action plans created in access control software shall be automatically added in VMS to be configured as any other Resource. Doors shall be able to be edited and user information on the cardholder picture shall be updated once updated in access control software. |                     |
|      |           | 2) Rules can be configured based on these partner resources and then alarm events shall be able to be created and then searched for.                                                                                                                                                                                                                                                |                     |
|      |           | 3) The partner icons can also be added to maps.                                                                                                                                                                                                                                                                                                                                     |                     |
|      |           | Access Control Systems: Available for integration.                                                                                                                                                                                                                                                                                                                                  |                     |
| 80   |           | VMS should support ONVIF Profiles S, G & T                                                                                                                                                                                                                                                                                                                                          |                     |



| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                               | Compliance (Yes/No) |
|------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 81   |           | VMS system should support high availability and failover with automatic synchronization to ensure maximum uptime.                                                                                                                                                                            |                     |
| 82   |           | VMS should support centralized search with multiple categories and filters for bookmarks, recordings, motion alarms, events, vehicles, people, and data from third-party systems.                                                                                                            |                     |
| 83   |           | VMS should provide an SDK or API for seamless integration with third-party systems and should include libraries and documentation for easy integration.                                                                                                                                      |                     |
| 84   |           | VMS should provide a health monitoring system with real-time alerts and a system dashboard to monitor the health of cameras and servers.                                                                                                                                                     |                     |
| 85   |           | VMS should support installation on virtual servers for flexibility and scalability in large deployments.                                                                                                                                                                                     |                     |
| 86   |           | VMS system shall be a scalable client-server architecture and capable of supporting installation on both physical and virtual servers.                                                                                                                                                       |                     |
| 87   |           | VMS system should include automatic camera discovery capabilities.                                                                                                                                                                                                                           |                     |
| 88   |           | VMS should support multilayered map functionality that allows interactive control of the entire surveillance system, showing system integrity, and integrating seamlessly with a video wall module.                                                                                          |                     |
| 89   |           | VMS should include comprehensive audit logs showing full system awareness and user activity.                                                                                                                                                                                                 |                     |
| 90   |           | VMS should support integration of external Video Content Analysis (VCA) systems and other third-party video analytics tools.                                                                                                                                                                 |                     |
| 91   |           | The VMS platform should be STQC tested as per guidelines by MeitY. The valid certificate from respective VMS OEM must be submitted at the time of bid of this tender.                                                                                                                        |                     |
| 92   |           | Considering past experience and multiple issues faced in past and ongoing at Customer Command Hospital, all IP CCTV cameras & VMS proposed by bidder should be from same OEM/Make for seamless integration, better performance & features interoperability & after service sales management. |                     |
| 93   |           | Bidder will have to confirm in writing that Bidder/OEM of major equipment's like: server,                                                                                                                                                                                                    |                     |

| SNo.       | Parameter                                      | Specifications                                                                                                                                                                                                                                                                                                                                                                       | Compliance (Yes/No) |
|------------|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|            |                                                | Video wall, Network Switches, VMS, Cameras have functional after sales service centres in India region from last 5 years (pl. submit proof of major documents of company, GST certificate, Shop registration certificate etc.) and are accessible during warranty period and after warranty period as and when required to ensure healthy condition of system for 24 hrs. X 7 basis. |                     |
| <b>63.</b> | <b>Video Summarization</b>                     |                                                                                                                                                                                                                                                                                                                                                                                      |                     |
| 1          | Indigenous Product & IPR Ownership             | The offered Video Summarization module shall be an indigenous module developed, owned, and maintained by the OEM. All source code, model pipelines, intellectual property, design documentation, and build processes shall remain under the OEM's exclusive ownership and control.                                                                                                   |                     |
| 2          | Compliance with Indian Cybersecurity Standards | The offered Video Summarization module shall comply with STQC IoTSCS requirements, BIS ER-01:2024 standards (where applicable to software stack components), and relevant CERT-In cybersecurity advisories.                                                                                                                                                                          |                     |
| 3          | Data Protection & Residency (DPDP Act 2023)    | The Video Summarization module shall comply with the Digital Personal Data Protection (DPDP) Act 2023. All video data, derived metadata, attribute indexes, and audit logs generated by the module shall be stored and processed within India.                                                                                                                                       |                     |
| 4          | Quality & Information Security Certifications  | The OEM offering the Video Summarization module shall hold valid ISO 9001 (Quality Management) and ISO 27001 (Information Security Management) certifications issued in the OEM's legal name.                                                                                                                                                                                        |                     |
| 5          | Large-Scale Analytics Deployment Experience    | The OEM shall have at least one (1) deployment involving video analytics or investigation workflows operating under a centralized command platform and shall produce a valid purchase order.                                                                                                                                                                                         |                     |
| 6          | Federated / Multi-Site Deployment Maturity     | The OEM shall demonstrate prior experience deploying analytics modules across multi-site architectures with centralized monitoring and distributed recording environments.                                                                                                                                                                                                           |                     |
| 7          | Integrated VMS Stack Operation                 | The Video Summarization module shall operate as an integrated add-on within the offered VMS stack without requiring a separate user interface or standalone system for core functionality.                                                                                                                                                                                           |                     |

| SNo. | Parameter                          | Specifications                                                                                                                                                                       | Compliance (Yes/No) |
|------|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 8    | Recorded Video Analysis Capability | The module shall analyze recorded video streams and generate summarized outputs to significantly reduce manual viewing time during post-event investigation.                         |                     |
| 9    | Online & Offline Video Support     | The module shall support analysis of both live video feeds and offline pre-recorded video files in standard formats.                                                                 |                     |
| 10   | Object Extraction Engine           | The module shall automatically extract moving objects including People, Vehicles, and Animals from video streams for indexing and summarization.                                     |                     |
| 11   | Object Classification Categories   | The Video Summarization module shall classify extracted objects into predefined categories including Person, Two-Wheeler, Car, Bus, Truck, and Animal.                               |                     |
| 12   | People Classification              | The module shall support People categorization including Man and Woman for refined investigation workflows.                                                                          |                     |
| 13   | Vehicle Classification             | The module shall support classification of Two-Wheeled Vehicles (e.g., Bicycle, Motorcycle) and Other Vehicles (e.g., Car, Truck, Bus).                                              |                     |
| 14   | Animal Classification              | The module shall support classification of Animals including Dog, Cat, and equivalent detected classes.                                                                              |                     |
| 15   | Attribute-Based Filtering          | The module shall allow filtering of summarized results based on object attributes including clothing color, upper/lower garment type, bag presence, vehicle color, and vehicle type. |                     |
| 16   | Time-Range Filtering               | The module shall allow limiting search and summarization to user-defined date and time ranges across authorized cameras.                                                             |                     |
| 17   | Camera-Based Filtering             | The module shall support restricting analysis to selected cameras or defined camera groups within the system.                                                                        |                     |
| 18   | Area-Based Inclusion / Exclusion   | The module shall allow inclusion or exclusion of user-defined zones for object-based summarization and investigation.                                                                |                     |
| 19   | Dwell-Time Filtering               | The module shall allow identification and selection of objects dwelling beyond configurable time thresholds within defined areas.                                                    |                     |
| 20   | Speed-Based Filtering              | Where camera calibration is available, the module shall support filtering of objects based on estimated speed parameters.                                                            |                     |

| SNo.       | Parameter                        | Specifications                                                                                                                                                                                                                                            | Compliance (Yes/No) |
|------------|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 21         | Appearance Similarity Search     | The Video Summarization module shall enable identification of similar-looking objects across video archives using appearance-based similarity search.                                                                                                     |                     |
| 22         | Cross-Camera Object Correlation  | The module shall support correlation of object appearances across multiple cameras to reconstruct movement timelines within a defined time range.                                                                                                         |                     |
| 23         | Object Superimposition Rendering | The module shall support reconstruction and superimposition of extracted objects over the original scene to enable simultaneous visualization of events occurring at different timestamps.                                                                |                     |
| 24         | Timeline Compression Capability  | The module shall generate condensed summarized video outputs from long-duration recordings to significantly reduce investigation time.                                                                                                                    |                     |
| 25         | Geo-Spatial Object Visualization | The module shall display object movement across cameras on the configured map / e-map interface with associated timestamps.                                                                                                                               |                     |
| 26         | KPI & Trend Visualization        | The module shall generate analytical indicators including traffic patterns, visitor/pedestrian counts, object frequency, and general activity trends derived from extracted objects.                                                                      |                     |
| 27         | ANPR Data Correlation            | Where ANPR integration is enabled, the module shall correlate vehicle metadata with summarization workflows for unified investigation.                                                                                                                    |                     |
| 28         | Summary Export Capability        | The module shall support export of summarized video outputs and associated metadata in standard formats without altering original evidentiary recordings.                                                                                                 |                     |
| 29         | Detailed Investigation Reporting | The module shall generate detailed reports for searched objects including number of appearances, time range, and camera locations, with linkage to playback within the VMS.                                                                               |                     |
| 30         | Performance Benchmark            | The module shall be capable of generating summarized output for up to two (2) hours of Full HD recorded video within ten (10) minutes under recommended hardware configuration.                                                                           |                     |
| <b>64.</b> | <b>AI Based Video Analytics</b>  |                                                                                                                                                                                                                                                           |                     |
| 1          | Video Analytics                  | Intelligent Video is an advanced solution that performs intelligent video analysis and fully automates video monitoring. It automatically tracks and identifies objects, analyzes motion and extracts video intelligence from IP camera or video streams. |                     |

| SNo. | Parameter                                | Specifications                                                                                                                                                               | Compliance (Yes/No) |
|------|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                          | The output of this system is analysis and video data mining in real-time events or store in a database.                                                                      |                     |
|      | Intrusion Analytics (TripWire Detection) | provides automated perimeter monitoring and secure area protection. It should be able to capture intrusion on any time within marked boundary.                               |                     |
|      | Crowd Density & Heatmap Analytics        | Crowd Detection analytics is completely AI Engine Deep learning-based analytics (CNN-based models) Identify the Real-time crowd density detection (Low/Medium/High/Critical) |                     |
|      |                                          | Application has Configurable thresholds and alerts.                                                                                                                          |                     |
|      |                                          | Application triggered event based on different density levels like Low / Medium / High / Critical means overcrowded.                                                         |                     |
|      |                                          | System shall detect and classify crowd density in configurable zones                                                                                                         |                     |
|      |                                          | Application triggered Real-time alerts when thresholds exceed limits.                                                                                                        |                     |
|      |                                          | Capability to work in:<br>Indoor and outdoor environments<br>Day/Night conditions                                                                                            |                     |
|      | Anomaly Detection (Reverse Flow/Panic)   | Application should detect anomaly like reverse flow of crowd/panic moment.                                                                                                   |                     |
|      |                                          | Generate color-coded heatmaps showing like High traffic zones.                                                                                                               |                     |
|      |                                          | Application should triggered alert and event on overcrowding.                                                                                                                |                     |
|      |                                          | Application should triggered alert and event on Sudden crowd surge.                                                                                                          |                     |
|      |                                          | Application should triggered alert and event on Restricted area crowd formation                                                                                              |                     |
|      |                                          | Application should generate reports like:<br>Footfall count<br>Peak crowd hours<br>Zone utilization                                                                          |                     |
|      | AI Video Security (Unattended Object)    | Application should detect unattended object in the field of view of the camera.                                                                                              |                     |
|      |                                          | Application should Monitoring predefined zones for any type of objects left.                                                                                                 |                     |
|      |                                          | Application should triggered alert and event on object left.                                                                                                                 |                     |

| SNo. | Parameter                        | Specifications                                                                                                                                                                                                                                                                           | Compliance (Yes/No) |
|------|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      | AI Video Security (Weapon)       | AI-based Weapon Detection Video Analytics System capable of detecting visible weapons in real-time using IP cameras.                                                                                                                                                                     |                     |
|      |                                  | System shall detect weapons including: pistols, rifles, Knives and triggered real time alert and event.                                                                                                                                                                                  |                     |
|      | AI Video Security (Fire & Smoke) | The Smoke and Fire Detection feature detects flames and smoke in the camera's field of vision within a virtually monitored area of interest. This analytics detects flames, reflected fire light, smoke clouds, and ambient smoke and alerts users in real-time or at regular intervals. |                     |
|      |                                  | Application should triggered alert and event on Fire & Smoke.                                                                                                                                                                                                                            |                     |
|      | AI Video Security (Loitering)    | Loitering Detection should detect individuals or groups loitering in predefined zones.                                                                                                                                                                                                   |                     |
|      |                                  | Application should detect Human loitering.                                                                                                                                                                                                                                               |                     |
|      |                                  | Application should generate real-time alerts and maintaining event logs for loitering events.                                                                                                                                                                                            |                     |
|      |                                  | also mail alert or alarm should be directly integrated in VA in real time basis.                                                                                                                                                                                                         |                     |
|      |                                  | Vendor will provide MIS application in which daily and monthly report will be generated for intrusion detection and object classification in standard format like PDF,CSV and Excel                                                                                                      |                     |
| 2    |                                  | Video Analytics should process multiple IP cameras parallel.                                                                                                                                                                                                                             |                     |
| 3    |                                  | The Video Analytics (VA) shall be designed to provide Intelligent Video Analysis for 24/7 surveillance with support for 3rd party devices like IP cameras.                                                                                                                               |                     |
| 4    |                                  | The VA configurator shall have easy to use graphical user interface with live alarms list for easy parameter fine tuning and feedback.                                                                                                                                                   |                     |
| 5    |                                  | The system shall be designed to work for 24x7 unattended operations                                                                                                                                                                                                                      |                     |
| 6    |                                  | This is server-based analytics which processes RTSP streaming of IP camera.                                                                                                                                                                                                              |                     |
| 7    |                                  | Video Analytics software processes images, video files, IP Cameras.                                                                                                                                                                                                                      |                     |
| 8    |                                  | Analytics software should process multiple IP cameras on single system.                                                                                                                                                                                                                  |                     |

| SNo. | Parameter  | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Compliance (Yes/No) |
|------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 9    |            | Multiple analytics should set on multiple cameras at time.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| 10   |            | The VA shall support cameras using any of the video compression formats H.264/MPEG4/MJPEG.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| 11   |            | The system should allow the use of a pool of video analytic algorithm on any cameras without limitations. It should be very easy to change an algorithm from a camera to another.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                     |
| 12   |            | The system should allow multiple analytics configure to single or multiple cameras.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                     |
| 13   |            | The System should work on offline mode like Video Clips.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                     |
| 14   |            | Video Analytics should work in both Day & Night mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                     |
| 15   |            | Video Analytics support IR cameras.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                     |
| 16   |            | Video Analytics should use databse like MySQL.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     |
| 17   |            | Video Analytics should store event unique id, event name, evidence image, evidence video, date & time inside database.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                     |
| 18   |            | Video Analytics should communicate with any third party hardware using Relay devices.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                     |
| 19   |            | Highly efficient video analytics can run on a variety of cameras and platforms                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     |
| 20   |            | Video summary (Incident Video) can reduce a long-archived video to a manageable video with just actual events                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                     |
| 21   |            | VA can have support of network LED light relays.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
| 22   | AI Enabled | Based on Artificial Intelligence: AI-based Video Analytics shall be enabled with a collection of indigenously developed AI techniques, based on advanced image and video processing, computer vision and pattern recognition. Leveraging our numerous proprietary models, AI and underlying deep neural networks (DNNs), enables the platform to efficiently compute automatic object/ pattern detection, multi-level classification, etc. These models have been generated with a wide range of real-life visual datasets, to provide unparalleled accuracy, using optimal computing bandwidth suitable for various application domains. Classification like Human, Pet, Vehicle available. |                     |

| SNo. | Parameter                          | Specifications                                                                                                                                                                                                                                                                                                                                                              | Compliance (Yes/No) |
|------|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 23   | Camera Agnostic                    | Agnostic to any make and model of camera. It is built on robust technology and can work with any video data, whether real-time or archived, and generated from any source like VMS, NVR.                                                                                                                                                                                    |                     |
| 24   | Unprecedented Scalability          | Highly scalable software architecture. Highly optimised AI codebase that supports multi-threaded processing of the algorithms, and multiple analytics functions to run in parallel, in each camera in the surveillance system. The footprint is very small with reduced computational and memory requirement, because of its indigenous design and innovative Architecture. |                     |
| 25   | Integrated with Intelligent VMS    | Video Analytics should integrate with any make & model of Video Management Software (IVMS). This homogenous, unified video computing architecture helps integrate with any make and model of VMS.                                                                                                                                                                           |                     |
| 26   | Software Interface                 | Easy-to-use, intuitive and feature-rich desktop, handheld and web user interface.                                                                                                                                                                                                                                                                                           |                     |
| 27   | Field-proven Technology            | The AI-based analytics framework and the applications are field-tested under a wide range of environmental and lighting conditions. Proven to work more reliably in high population density conditions, compared to other competing solutions. Field-proven with real-life deployments across various domains, cities, enterprises and other critical Installations.        |                     |
| 28   | API's                              | Pre-integrated with VA, yet a rich API is also available to integrate the VA platform with an existing surveillance installation, or a third-party VMS, as per the choice of the user.                                                                                                                                                                                      |                     |
| 29   | Automatic eAlerts & Event Messages |                                                                                                                                                                                                                                                                                                                                                                             |                     |
|      |                                    | XLS Output Report: User can export all events inside XLS.                                                                                                                                                                                                                                                                                                                   |                     |
|      |                                    | Email: Email functionality available to report any incident happen for mention analytics.                                                                                                                                                                                                                                                                                   |                     |
|      |                                    | HTML Reports: HTML reports available on UI.                                                                                                                                                                                                                                                                                                                                 |                     |
|      |                                    | Database / ODBC: MySQL Database support available.                                                                                                                                                                                                                                                                                                                          |                     |



| SNo. | Parameter                                                        | Specifications                                                                                                                                                                                                                                                                                        | Compliance (Yes/No) |
|------|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                                                  | REST JSON API: Using API we can communicate with any third part hardware/software.                                                                                                                                                                                                                    |                     |
|      |                                                                  | Date & Time based search options are available.                                                                                                                                                                                                                                                       |                     |
|      |                                                                  | Search by Camera Name / Location option is available.                                                                                                                                                                                                                                                 |                     |
|      |                                                                  | Search by Event Name option is available.                                                                                                                                                                                                                                                             |                     |
|      |                                                                  | Search by classification like Human, Pet, Vehicle                                                                                                                                                                                                                                                     |                     |
| 30   | Physical Alerts                                                  | Sound & Audio: Buzzer alerts available with system. VA can having support of network LED lights for buzzer and lights                                                                                                                                                                                 |                     |
| 31   | Visual Flashing Alerts                                           | Flashing event alert on screen: Flashing event alerts available on UI.                                                                                                                                                                                                                                |                     |
| 32   | Event Details                                                    | The system Graphical User Interface should be bi-lingual: it shall support both English & Graphical User interface (GUI) should provide following information: -<br>a. Image of the generated action event<br>b. Video of the generated event<br>c. Event Descrtpition<br>d. Date, Time of the event. |                     |
| 33   | Storage                                                          | The System shall store JPEG/MJPEG images of each action perform in video & also store event video.                                                                                                                                                                                                    |                     |
|      |                                                                  | The system shall store the event data into a MySQL.                                                                                                                                                                                                                                                   |                     |
| 34   | Integration : Hardware, VMS, Relay Devices, Third Party NVR, DVR |                                                                                                                                                                                                                                                                                                       |                     |
|      |                                                                  | Available with API/SDK for partners and external systems.                                                                                                                                                                                                                                             |                     |
|      |                                                                  | Integrated with analog, IP/network and digital cameras (it can also take video input from many DVR and NVR/video management solutions)                                                                                                                                                                |                     |
|      |                                                                  | Enables security professionals to rapidly search for past incidents from archived video                                                                                                                                                                                                               |                     |
|      |                                                                  | Increase productivity and efficiency of the security professionals                                                                                                                                                                                                                                    |                     |
|      |                                                                  | Video Analytics should communicate or intgrate with any Video Management System (VMS).                                                                                                                                                                                                                |                     |
|      |                                                                  | Video Analytics should communicatr with VMS and select specifide cameras for processing.                                                                                                                                                                                                              |                     |
|      |                                                                  | Video Analytics should detect incident and same incident share with VMS system.                                                                                                                                                                                                                       |                     |

| SNo.       | Parameter                        | Specifications                                                                                                                                                                                                                                                 | Compliance (Yes/No) |
|------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|            |                                  | Video analytics should communicate or integrate with relay devices.                                                                                                                                                                                            |                     |
| 35         | System requirement               |                                                                                                                                                                                                                                                                |                     |
|            |                                  | Operating System: Linux: Ubuntu 20.04 LTS 64-bit Operating System                                                                                                                                                                                              |                     |
|            |                                  | Database: MySQL                                                                                                                                                                                                                                                |                     |
| <b>65.</b> | <b>Facial Recognition System</b> |                                                                                                                                                                                                                                                                |                     |
| 1          |                                  | Face Detection and Recognition, Video Capture Module, Face Recognize must be a Deep Learning and AI-based face detection, search and recognition solution with an accuracy as high as +99%.                                                                    |                     |
| 2          |                                  | Facial Recognition for missing person: Application should identify missing person on live IP camera using predefined face database. Using AI and deep learning, face recognition shall achieve accuracy as high as +99%                                        |                     |
| 3          |                                  | Recognition is available in both real-time and off-line modes and enrolment is available from both video and still images. Facial recognition is achieved by analysing multiple images per face with millisecond response times depending on system resources. |                     |
| 4          |                                  | Face Recognizer is available with a REST API/SDK for OEM partners and application builders. Easy integration of alerts is achieved through http/JSON and an open architecture.                                                                                 |                     |
| 5          |                                  | The System should automatically detect a Face in the camera view.                                                                                                                                                                                              |                     |
| 6          |                                  | The system shall be designed to work for 24x7 unattended operations                                                                                                                                                                                            |                     |
| 7          |                                  | The System shall automatically detect the face in the captured video feed in real-time.                                                                                                                                                                        |                     |
| 8          |                                  | The System shall store JPEG image of face detected image and train image into DBMS like MySql etc. database along with date                                                                                                                                    |                     |
| 9          |                                  | The system should be able to handle multiple faces simultaneously i.e. if there are more than one face in the camera view the system should be able to detect and recognize all faces.                                                                         |                     |
| 10         |                                  | FRS recognize face with a minimum of 300 lux of light intensity on face.                                                                                                                                                                                       |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                             | Compliance (Yes/No) |
|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 11   |           | FRS recognition speed should be less than 1-2 seconds                                                                                                                                                                                                                                      |                     |
| 12   |           | FRS should have capability for recognition of Frontal face along with Non frontal face and in case of non-frontal recognition, solution be capable of detect, recognize and log faces. Face resolution 70 pixels min, 100-300 recommended. Min 30 pixels between eyes, 50-150 recommended. |                     |
| 13   |           | FRS Architecture should support Enrolment and Recognition of faces in Desktop and Central server respectively and simultaneously.                                                                                                                                                          |                     |
| 14   |           | System should be able to detect and recognize the face from all ethnicities.                                                                                                                                                                                                               |                     |
| 15   |           | Face Recognition System (FRS) shall work on real time with IP cameras.                                                                                                                                                                                                                     |                     |
| 16   |           | The system shall detect and recognize faces from images.                                                                                                                                                                                                                                   |                     |
| 17   |           | The system shall detect and recognize faces from Video Clips.                                                                                                                                                                                                                              |                     |
| 18   |           | The system shall detect and recognize faces from IP Cameras, Input: RTSP/HTTP stream from network/IP cameras                                                                                                                                                                               |                     |
| 19   |           | The system shall have the best suited technology employed for 1:1 (one to one) and 1: N (one to many) matching application, when they enter the field of view of CCTV Cameras.                                                                                                             |                     |
| 20   |           | The system shall work on partial occlusion of face, glasses, scarfs, changes of facial expression etc.                                                                                                                                                                                     |                     |
| 21   |           | The system shall be able work on moderate face rotation either horizontal or vertical, Angle variations from frontal face – yaw +/- 25 degrees, pitch +/- 25 degrees, roll +/- 20 degrees                                                                                                  |                     |
| 22   |           | The system shall be able to add photographs obtained from law enforcement agencies to the criminals' repositories along with option details for sex, age, scars, tattoos etc for future searches                                                                                           |                     |
| 23   |           | Live video should display detected face with bounding box and recognized face with its name on UI.                                                                                                                                                                                         |                     |
| 24   |           | The system shall have the provision to take multiple samples of same face belonging to same person                                                                                                                                                                                         |                     |

| SNo. | Parameter        | Specifications                                                                                                                                                                                                                                                                                                          | Compliance (Yes/No) |
|------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 25   |                  | Real Time Face Detection & Recognition Solution: This application detects and analyses the faces captured in real time from a face recognition camera. The application does real time video screening and shows the matching results instantly. The application also gives anonymous people analytics.                  |                     |
| 26   |                  | The facial recognition system should be accessible from 5 different desktop/ laptops at any given time.                                                                                                                                                                                                                 |                     |
| 27   |                  | FRS must support a user management module that enables different user level groups to support various permission levels.                                                                                                                                                                                                |                     |
| 28   |                  | The system shall have option to enrol face images from CCTV cameras/video source.                                                                                                                                                                                                                                       |                     |
| 29   |                  | The system shall have option to enrol face images from video source.                                                                                                                                                                                                                                                    |                     |
| 30   |                  | The system shall have option to enrol face images from image source.                                                                                                                                                                                                                                                    |                     |
| 31   |                  | The system shall have option to detect Age of face detected/recognize.                                                                                                                                                                                                                                                  |                     |
| 32   |                  | The system shall have option to detect Gender of face detected/recognize.                                                                                                                                                                                                                                               |                     |
|      | Alert Generation |                                                                                                                                                                                                                                                                                                                         |                     |
| 1    |                  | The system should have option to input certain face description according to the hot listed categories like "VIP", "CRIMINAL", "SUSPECIOUS", "NORMAL", "STAFF", "MISSING" etc. by authorized personnel.                                                                                                                 |                     |
| 2    |                  | The system should be able to generate automatic alarms to alert the control room personnel for further action, in the event of detection of any face falling in the Hot listed categories like VIP, CRIMINAL, SUSPECIOUS, MISSING.                                                                                      |                     |
| 3    |                  | FRS Capture face images from live CCTV feed and generate alerts if a blacklist match is found.                                                                                                                                                                                                                          |                     |
| 4    |                  | Email Alert:-The system should be able to generate automatic email alarms to alert the control room personnel for further action, in the event of detection of any face falling in the Hot listed categories.<br>i. Criminal/Suspicious Email Alert- Automatic Email will send to care taker if any CRIMINAL/SUSPECIOUS |                     |

| SNo. | Parameter          | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Compliance (Yes/No) |
|------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                    | <p>person appears in front of Camera view.</p> <p>ii. Staff Email Alert- Automatic Email will send to caretaker if any STAFF person appears in front of Camera view.</p> <p>iii. VIP: Automatic Email will send to caretaker if any VIP person appears in front of Camera view.</p> <p>iv. Unknown: Automatic Email will send to caretaker if any UNKNOWN person appears in front of Camera view.</p> <p>v. Along with Email App will send recently detected/recognize image, Persona Name, Category like VIP,STAFF,SUSPECIOUS/CRIMINAL, Date &amp; Time.</p> |                     |
| 5    |                    | Visual Alert:-The system should be able to generate automatic visual alert by showing flashing screen alarms to alert the control room personnel for further action, in the event of detection of any face falling in the Hot listed categories                                                                                                                                                                                                                                                                                                               |                     |
| 6    |                    | Audio Alert:-The system should be able to generate automatic audio alarms to alert the control room personnel for further action, in the event of detection of any face falling in the Hot listed categories                                                                                                                                                                                                                                                                                                                                                  |                     |
|      | Important features |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     |
| 1    |                    | System is able to Moderate aging changes – Recognition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                     |
| 2    |                    | System is able to Changes in facial expression – Recognition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| 3    |                    | System is able to Changes in beard or hair – Recognition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                     |
| 4    |                    | FRS act as Investigation Tool, which can work on recorded videos post- incident analysis                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                     |
| 5    |                    | FRS should detect gender of detected or recognized face. Etc male, female.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |
| 6    |                    | FRS should detect age of detected or recognized face.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
|      |                    | Report – Vehicle Log Module & Search Options                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| 1    |                    | System should generate report by Location.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |
| 2    |                    | System should generate report by Date & Time combinations.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Compliance (Yes/No) |
|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 3    |           | System should generate report based on Watchlist category like 'Wanted', 'Suspicious', 'VIP', 'Authorized', 'Staff', 'Normal'.                                                                                                                                                                                                                                                                                                                                                                  |                     |
| 4    |           | System should generate report based on Face Name.                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     |
| 5    |           | Allows face to be tracked across multiple cameras or Locations                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| 6    |           | Records and logs all license plates at a scene for later forensic investigation                                                                                                                                                                                                                                                                                                                                                                                                                 |                     |
| 7    |           | System should able to give OCR Image/Licence plate Image                                                                                                                                                                                                                                                                                                                                                                                                                                        |                     |
| 8    |           | System should generate report by 'Wanted', 'Suspicious', 'VIP', 'Authorized', 'Staff', 'Normal' watchlist category.                                                                                                                                                                                                                                                                                                                                                                             |                     |
| 9    |           | The system shall enable easy and quick retrieval of snapshots, other data for post incident analysis and investigations. For example a database could be searched using criteria like date, time, location and face name, watchlist category.                                                                                                                                                                                                                                                   |                     |
| 10   |           | The system should be able to generate suitable reports that will provide meaningful data to concerned authorities and facilitate optimum utilization of resources. System should able to give camera ID / Camera Location etc on report page, System should able to give recognize face image with confidence %, System should able to give train face Image.<br>System should able to give Watch list category ("Wanted", "Suspicious", VIP", "Staff", Authorized', 'Normal' ) on report page. |                     |
| 11   |           | The system shall have option to save custom reports for subsequent use. The system shall have option to export report being viewed to common format for use outside of the FRS or exporting into other systems.                                                                                                                                                                                                                                                                                 |                     |
| 12   |           | The system Graphical User Interface should be bi-lingual: it shall support both English & Graphical User interface (GUI) should provide following information: -<br>a. Image of the recently detected face.<br>b. Image of the train face.                                                                                                                                                                                                                                                      |                     |

| SNo. | Parameter                | Specifications                                                                                                                                                                                                                                                       | Compliance (Yes/No) |
|------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                          | c. Person name in Text.<br>d. Date, Time and location of face.<br>e. Event/images/Date/Additional Information of face                                                                                                                                                |                     |
|      | Face Status Alarm Module |                                                                                                                                                                                                                                                                      |                     |
| 1    |                          | On successful recognition of the Face system should be able generate automatic alarm to alert the control room for faces which have been marked as "Wanted", "Suspicious", "VIP",                                                                                    |                     |
|      |                          | Watchlist                                                                                                                                                                                                                                                            |                     |
| 1    |                          | The system should have option to input certain face description according to the hot listed categories like "VIP", "CRIMINAL", "SUSPICIOUS", "NORMAL", "STAFF", 'Authorized' etc. by authorized personnel.                                                           |                     |
| 2    |                          | The system should have ability to handle initial real-time watch list of 10,000 Faces                                                                                                                                                                                |                     |
|      |                          | Face Log Module / Search By                                                                                                                                                                                                                                          |                     |
| 1    |                          | The system shall enable easy and quick retrieval of snapshots, and other data for post incident analysis and investigations. For example, a database could be searched using criteria like date, time, location and Person Name, Camera Name, according to category. |                     |
| 2    |                          | The system should be able to generate suitable MIS reports that will provide meaningful data to concerned authorities and facilitate optimum utilization of resources. These reports shall include.                                                                  |                     |
| 3    |                          | The system shall have Search option to tune the reports based on person name, date and time, site location as per the need of the Authorities.                                                                                                                       |                     |
| 4    |                          | The system shall have option to save custom reports for subsequent use. The system shall have option to export report being viewed to common format for use outside of the FRS or exporting into other systems.                                                      |                     |
|      | Storage                  |                                                                                                                                                                                                                                                                      |                     |
| 1    |                          | The System shall store JPEG images of faces.                                                                                                                                                                                                                         |                     |
| 2    |                          | The system shall store the vehicle license number into a relational SQL database (MSSQL, PostgreSQL, MySQL, Oracle, etc) along with date                                                                                                                             |                     |

| SNo.       | Parameter                                                        | Specifications                                                                                                                           | Compliance (Yes/No) |
|------------|------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|            | Integration : Hardware, VMS, Relay Devices, Third Party NVR, DVR |                                                                                                                                          |                     |
| 1          |                                                                  | Available with API/SDK for partners and external systems.                                                                                |                     |
| 2          |                                                                  | Integrated with analogue, IP/network and digital cameras (it can also take video input from many DVR and NVR/video management solutions) |                     |
| 3          |                                                                  | Enables security professionals to rapidly search for past incidents from archived video                                                  |                     |
| 4          |                                                                  | Increase productivity and efficiency of the security professionals                                                                       |                     |
| 5          |                                                                  | Video Analytics should communicate or integrate with any Video Management System (VMS).                                                  |                     |
| 6          |                                                                  | Video Analytics should communicate with VMS and select specified cameras for processing.                                                 |                     |
| 7          |                                                                  | Video Analytics should detect incident and same incident share with VMS system.                                                          |                     |
| 8          |                                                                  | Video analytics should communicate or integrate with relay devices.                                                                      |                     |
|            | Automatic eAlerts & Event Messages:                              |                                                                                                                                          |                     |
| 1          |                                                                  | XLS Output Report: User can export all events inside XLS.                                                                                |                     |
| 2          |                                                                  | Email: Email functionality available to report people count.                                                                             |                     |
| 3          |                                                                  | Email: Email functionality available to report any incident happen for mention analytics.                                                |                     |
| 4          |                                                                  | HTML Reports: HTML reports available on UI.                                                                                              |                     |
| 5          |                                                                  | Database / ODBC: MySQL Database support available.                                                                                       |                     |
| 6          |                                                                  | REST JSON API: Using API we can communicate with any third part hardware/software.                                                       |                     |
| <b>66.</b> | <b>ANPR &amp; Vehicle Detection</b>                              |                                                                                                                                          |                     |
| A          | Vehicle Detection Module                                         |                                                                                                                                          |                     |
| 1          |                                                                  | The System should automatically detect a vehicle in the camera view using video detection and activate license plate recognition         |                     |
| 2          |                                                                  | The system shall detect and recognize number plates from images.                                                                         |                     |
| 3          |                                                                  | The system shall detect and recognize number plates from Video Clips.                                                                    |                     |



| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                       | Compliance (Yes/No) |
|------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 4    |           | The system shall detect and recognize number plates from IP Cameras, Input: RTSP/HTTP stream from network/IP cameras                                                                                                                                                 |                     |
| 5    |           | Detects and recognizes license plates on moving or stationary vehicles                                                                                                                                                                                               |                     |
| 6    |           | Handles different plate styles, e.g. regular/stacked                                                                                                                                                                                                                 |                     |
| 7    |           | Various LPR/ANPR models available: gates, entrance, roadside, traffic lights, parking lots, highway, tollway and mobile/ law enforcement vehicles                                                                                                                    |                     |
| 8    |           | ANPR should supports processing of single frames and video streams                                                                                                                                                                                                   |                     |
| 9    |           | ANPR should easy to deploy with a wide variety of cameras                                                                                                                                                                                                            |                     |
| 10   |           | The system shall be designed to work for 24x7 unattended operations                                                                                                                                                                                                  |                     |
| 11   |           | The System shall automatically detect the license plate in the captured video feed in real-time.                                                                                                                                                                     |                     |
| 12   |           | The system shall perform OCR (optical character recognition) of the license plate characters (English alpha-numeric characters in standard fonts).                                                                                                                   |                     |
| 13   |           | The System shall store JPEG image of vehicle and license plate and enter the license plate number into DBMS like MySQL database along with date time stamp and site location details.                                                                                |                     |
| 14   |           | The system should be able to handle multiple vehicles simultaneously i.e. if there are more than one vehicle in the camera view the system should be able to detect all of them, extract their license plate numbers and perform OCR on the license plate characters |                     |
| 15   |           | System should be able to detect and recognize the English alphanumeric License plate in standard fonts and formats of all vehicles including cars, HCV, LCV and two wheelers.                                                                                        |                     |
| 16   |           | System should able to detect single row, double row, multi row, square and rectangular plates as well                                                                                                                                                                |                     |
| 17   |           | The system shall be robust to variation in License Plates in terms of font, size, contrast and color and should work with good accuracy.                                                                                                                             |                     |

| SNo.     | Parameter                                                                          | Specifications                                                                                                                                                                                                 | Compliance (Yes/No) |
|----------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 18       | Image Processing / offline mode                                                    | Analytics should process images and extract Number plate details.                                                                                                                                              |                     |
| 19       | Video Processing / offline mode                                                    | Analytics should process video/clips and extract number plate details.                                                                                                                                         |                     |
| 20       | Model Classification                                                               | Analytics should classify the vehicles like Truck, Bus, Car, Motorbike.                                                                                                                                        |                     |
| 21       | Traffic Congestion, Predicts traffic jams and congestion ahead of time.            | Application should detect traffic congestion on the road. System shall detect congestion levels in real-time:<br>Free Flow<br>Moderate Traffic<br>Heavy Traffic<br>Congested / Gridlock                        |                     |
| 22       | Smart Parking Management - Reduces roadside parking chaos and improves route flow. | Application should detect the vehicle park in non-parking area, this is zone-based tracking.                                                                                                                   |                     |
| 24       | ANPR-Based Vehicle Monitoring - Detects suspicious or blacklisted vehicles.        | License Plate Recognizer™ is a Deep Learning and AI-based license plate detection, recognition solution. Application should detect suspicious or blacklisted vehicles using predefine watchlist functionality. |                     |
| 25       | Special Service Vehicle classification                                             | Analytics should classify Fire trucks; Police vehicles; Ambulance vehicles.                                                                                                                                    |                     |
| 26       | Axel Counting                                                                      | Analytics should count number of axles for a vehicle.                                                                                                                                                          |                     |
| 27       | Watchlist                                                                          | i. Compares detected plates against a watch list database and provides real-time alerts on plate matches.<br>ii. Enables automated matching against a watch list with real time alerting                       |                     |
| 28       | Speed Detection                                                                    | Application should identify the speed of vehicle and triggered events based on high-speed vehicle.                                                                                                             |                     |
|          |                                                                                    |                                                                                                                                                                                                                |                     |
| <b>B</b> | Automatic eAlerts & Event Messages:                                                |                                                                                                                                                                                                                |                     |
| 1        |                                                                                    | System should generate alerts based on 'Authorized', 'Stolen', 'Lost', 'Wanted', 'Uncategorised', 'Suspicious' based on predefine database.                                                                    |                     |

| SNo.     | Parameter                                                       | Specifications                                                                                                                                                                               | Compliance (Yes/No) |
|----------|-----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 2        |                                                                 | The system should be able to generate automatic alarms to alert the control room personnel for further action, in the event of detection of any vehicle falling in the Hot listed categories |                     |
| 3        |                                                                 | XLS Output Report: User can export all events inside XLS.                                                                                                                                    |                     |
| 4        |                                                                 | Email: Email functionality available to report people count.                                                                                                                                 |                     |
| 5        |                                                                 | Email: Email functionality available to report any incident happen for mention analytics.                                                                                                    |                     |
| 6        |                                                                 | HTML Reports: HTML reports available on UI.                                                                                                                                                  |                     |
| 7        |                                                                 | Database / ODBC: MySQL Database support available.                                                                                                                                           |                     |
| 8        |                                                                 | REST JSON API: Using API we can communicate with any third part hardware/software.                                                                                                           |                     |
| <b>C</b> | Physical Alerts                                                 |                                                                                                                                                                                              |                     |
| 1        |                                                                 | Sound & Audio: Buzzer alerts available with system                                                                                                                                           |                     |
| <b>D</b> | Visual Flashing Alerts                                          |                                                                                                                                                                                              |                     |
| 1        |                                                                 | Flashing event alert on screen: Flashing event alerts available on UI.                                                                                                                       |                     |
| <b>E</b> | Storage                                                         |                                                                                                                                                                                              |                     |
| 1        |                                                                 | The System shall store JPEG/MJPEG images of each action perform in video & also store event video.                                                                                           |                     |
| 2        |                                                                 | The system shall store the event data into a MySQL.                                                                                                                                          |                     |
| <b>F</b> | Integration: Hardware, VMS, Relay Devices, Third Party NVR, DVR |                                                                                                                                                                                              |                     |
| 1        |                                                                 | Available with API/SDK for partners and external systems.                                                                                                                                    |                     |
| 2        |                                                                 | Integrated with analog, IP/network and digital cameras (it can also take video input from many DVR and NVR/video management solutions)                                                       |                     |
| 3        |                                                                 | Enables security professionals to rapidly search for past incidents from archived video                                                                                                      |                     |
| 4        |                                                                 | Increase productivity and efficiency of the security professionals                                                                                                                           |                     |
| 5        |                                                                 | ANPR should communicate or integrate with any Video Management System (VMS).                                                                                                                 |                     |
| 6        |                                                                 | ANPR should communicate with VMS and select specific cameras for processing.                                                                                                                 |                     |

| SNo.     | Parameter                                    | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                             | Compliance (Yes/No) |
|----------|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 7        |                                              | ANPR should detect incident and same incident share with VMS system.                                                                                                                                                                                                                                                                                                                                                                       |                     |
| 8        |                                              | ANPR should communicate or integrate with relay devices.                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| <b>G</b> | Graphical User Interface                     |                                                                                                                                                                                                                                                                                                                                                                                                                                            |                     |
| 1        |                                              | The system Graphical User Interface should be bi-lingual: it shall support both English & Graphical User interface (GUI) should provide following information: -<br>a. Image of the vehicle<br>b. Image of the number plate<br>c. Text conversion of number plate after using OCR (Optical Character Recognition) technology<br>d. Date, Time and location of offending vehicle<br>e. Event/images/chart of ANPR<br>f. Axel count g. Color |                     |
| <b>H</b> | Report – Vehicle Log Module & Search Options |                                                                                                                                                                                                                                                                                                                                                                                                                                            |                     |
| 1        |                                              | System should generate report by Location.                                                                                                                                                                                                                                                                                                                                                                                                 |                     |
| 2        |                                              | System should generate report by Date & Time combinations.                                                                                                                                                                                                                                                                                                                                                                                 |                     |
| 3        |                                              | System should generate report based on license plate number.                                                                                                                                                                                                                                                                                                                                                                               |                     |
| 4        |                                              | System should generate report based on vehicle type.                                                                                                                                                                                                                                                                                                                                                                                       |                     |
| 5        |                                              | System should generate report based on vehicle axel count.                                                                                                                                                                                                                                                                                                                                                                                 |                     |
| 6        |                                              | System should generate report based on vehicle make & model.                                                                                                                                                                                                                                                                                                                                                                               |                     |
| 7        |                                              | Allows vehicles to be tracked across multiple cameras or Locations                                                                                                                                                                                                                                                                                                                                                                         |                     |
| 8        |                                              | Records and logs all license plates at a scene for later forensic investigation                                                                                                                                                                                                                                                                                                                                                            |                     |
| 9        |                                              | System should be able to give OCR Image/Licence plate Image                                                                                                                                                                                                                                                                                                                                                                                |                     |
| 10       |                                              | System should be able to give Watch list (“Wanted”, “Suspicious”, “Stolen) on report page                                                                                                                                                                                                                                                                                                                                                  |                     |
| 11       |                                              | The system shall enable easy and quick retrieval of snapshots, video and other data for post incident analysis and investigations. For example, a database                                                                                                                                                                                                                                                                                 |                     |

| SNo.     | Parameter                   | Specifications                                                                                                                                                                                                                                                                                       | Compliance (Yes/No) |
|----------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|          |                             | could be searched using criteria like date, time, location and vehicle number                                                                                                                                                                                                                        |                     |
| 12       |                             | The system should be able to generate suitable MIS reports that will provide meaningful data to concerned authorities and facilitate optimum utilization of resources. These reports shall include.                                                                                                  |                     |
| 13       |                             | The system shall have option to save custom reports for subsequent use. The system shall have option to export report being viewed to common format for use outside of the ANPRS or exporting into other systems.                                                                                    |                     |
| 14       |                             | Wild Character Search:- The system should provide advanced and smart searching facility of License plates from the database. There should be an option of searching number plates almost matching with the specific number entered (up to 1- and 2-character distance).                              |                     |
| <b>I</b> | Vehicle Status Alarm Module |                                                                                                                                                                                                                                                                                                      |                     |
| 1        |                             | On successful recognition of the number plate, system should be able generate automatic alarm to alert the control room for vehicles which have been marked as "Wanted", "Suspicious", "Stolen", "Expired". (System should have provision/expansion option to add more categories for future need).  |                     |
| 2        |                             | The Instantaneous and automatic generation of alarms. In case of identity of vehicle in any category which is define by user.                                                                                                                                                                        |                     |
| <b>J</b> | Storage                     |                                                                                                                                                                                                                                                                                                      |                     |
| 1        |                             | The System shall store JPEG/MJPEG images of vehicle as well as of thumbnail of the license plate for each vehicle                                                                                                                                                                                    |                     |
| 2        |                             | The system shall store the vehicle license number into a relational SQL database (MSSQL, PostgreSQL, MySQL, Oracle, etc) along with date timestamp and site location details. The necessary license/subscription/support services of the database software should be bundled with the ANPR software. |                     |
| <b>K</b> | Vehicle Category Editor     |                                                                                                                                                                                                                                                                                                      |                     |
| 1        |                             | The system should have option to input certain license plates according to category like "Wanted",                                                                                                                                                                                                   |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                         | Compliance (Yes/No) |
|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | "Suspicious" "Stolen", "Expired" etc. by Authorized personnel.                                                                                                                                         |                     |
| 2    |           | System should have option to specify maximum time to retain vehicle records in specific categories.                                                                                                    |                     |
| 3    |           | The system should have option to update vehicle status in specific category by authorized personnel. e.g. on retrieval of stolen vehicle, system entry should be changed from "Stolen" to "Retrieved". |                     |

#### Group-10: Smart Mobility, GIS & Digital Platforms

| SNo.       | Parameter               | Specifications                                                                                                                                                                                                                                                                                      | Compliance (Yes/No) |
|------------|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| <b>67.</b> | <b>ITMS Application</b> |                                                                                                                                                                                                                                                                                                     |                     |
| 1          |                         | System should have option for multiple options for discovery including IP address based discovery, IP address range discovery, CSV based discovery for bulk discovery and it should allow options to add custom fields to support customer specific data to upload during discovery.                |                     |
| 2          |                         | The system should fetch topology via SNMP for ARP tables from routers, MAC tables from layer 2 switches, cisco Discovery Protocol, Link Layer Discovery Protocol, Foundry Discovery Protocol or SynOptics Network Management Protocol. The discovery should be automated and continuous.            |                     |
| 3          |                         | Discovery has to work intelligently by identifying the device in the network by the given IP range and categorize into network devices and servers with vendor and model details.                                                                                                                   |                     |
| 4          |                         | Automatically learn devices that supports SNMP, HTTP, Ping, SMTP, POP3, WMI, JMX, SOAP, REST API, IPDC, SSH and Telnet along with any required protocol to communicate to the devices.                                                                                                              |                     |
| 5          |                         | System should support global threshold and it should have option to define individual resource/interface statistics level threshold.                                                                                                                                                                |                     |
| 6          |                         | Threshold & Alerts: define and store static & dynamic resource utilisation thresholds, define and maintain availability thresholds for individual components, services or applications, individual service actions / automated operations (performing a transaction, running an automated procedure |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                 | Compliance (Yes/No) |
|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | etc.), support comparison of actual availability, actual performance with agreed levels and alerting on breaches.                                                              |                     |
| 7    |           | Configurable parameters like frequency, data duration, resolution duration, sigma based polarity value, reset points should be available.                                      |                     |
| 8    |           | All thresholds should have set point, reset point, polarity, set point message and reset point message for ease of use.                                                        |                     |
| 9    |           | Detect & highlight faults (abnormal situations) in near real-time occurring anywhere within the monitored IT infrastructure.                                                   |                     |
| 10   |           | Provides Filtering, De-duplication, Holding, Suppression and Correlation capability to let users focus on the critical event that affects the business and business processes. |                     |
| 11   |           | Provides multi-level (preferably six-level) Severity definition, will handle events automatically and inform the designated person as per operational requirement.             |                     |
| 12   |           | System should support separate Rule Engine based alarms apart from the generic threshold.                                                                                      |                     |
|      |           | a. Should have capability to configure Device Group based, Node Based, Resources/Interface based, Aggregation link based.                                                      |                     |
|      |           | b. On Selection of Nodes/Resources/Aggregation links it have flexibility to filter based on fields available in node information                                               |                     |
|      |           | c. Rules should have option to apply configuration on top of performance value or based on configured threshold alarms                                                         |                     |
|      |           | d. Rules should have option configure the breach based on min, max and average values                                                                                          |                     |
|      |           | e. Should have option to configure rules in repeat counters                                                                                                                    |                     |
|      |           | f. Should have options to select custom alarm and clear alarm messages for individual configured rules                                                                         |                     |
|      |           | g. Should have option to send severity levels like error, warning and information                                                                                              |                     |
|      |           | h. Notifications support based on configured rules                                                                                                                             |                     |
| 13   |           | Provides alarm suppression with hold time and aid in prevention of flooding.                                                                                                   |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                | Compliance (Yes/No) |
|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 14   |           | Sends alert via E-mail, SMS, Execute Batch file, SNMP Trap, XML notification, Pop-up window and Audio alert.                                                                                                                                                                                                                                                                  |                     |
| 15   |           | Monitors all traffic from all the interfaces of the network device. Provides traffic Utilization based on individual interface level, nodes level or based on the group by location, branch, departments etc. as an Avg, Min and Max bandwidth, utilization, throughput or any custom monitoring parameters.                                                                  |                     |
| 16   |           | Provision to change the polling interval to any frequency depending on the priority till the individual component / resource level like each interface might have the different polling interval in the same device based of the criticality and importance of service customer.                                                                                              |                     |
| 17   |           | System should have capability to configure business, non-business hours or custom time polling. These configurations should be available for every device as well as every component in the device.                                                                                                                                                                           |                     |
| 18   |           | Provision to disable and enable the polling of specific type of devices.                                                                                                                                                                                                                                                                                                      |                     |
| 19   |           | System should have capability to configure the maintenance period for any device. When device is in maintenance period there is no polling done and the SLA clock on the device is stopped.                                                                                                                                                                                   |                     |
| 20   |           | SLA calculation / Isolation report should be made with the consideration of both the Primary and Secondary link together instead of individual link based. The downtime calculation will be measured when both the links are down for internal reporting and link based for ISP reporting. System should provide the flexible configuration in UI itself based on user needs. |                     |
| 21   |           | Provide a notification mechanism that allows administrator to define what notification channel to be used in different times of days, and able to trigger multiple notifications to alert multiple person and actions.                                                                                                                                                        |                     |
| 22   |           | Provide standard reports that display current status of nodes and interfaces. Reports could be viewed on daily graph (5 minute average), weekly graph (1                                                                                                                                                                                                                      |                     |



| SNo. | Parameter                | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Compliance (Yes/No) |
|------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                          | hour average minute average), monthly graph (1 hour average) and yearly graph (1 day average).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                     |
| 23   |                          | Reports & Dashboard: Pre defined Availability, Performance, Capacity Dashboards & Report. Should have option to drag and drop dashboard configuration option Should have option to add multiple type of widgets along with (Tabular, Summary, Multiple Graph options), Filter (predefined & Dynamic), Sort, Search, Group by, multi threshold, Export option to PDF, XLS etc., Generate automatically and send over Email or to a predefined folder, possible to define custom KPIs , A KPI definition must include the period-bound target value and the threshold value (to distinguish between the Green, Amber and Red zones.). |                     |
| 24   |                          | Automatically generate daily reports that provide a summary of the IT Infrastructure as well as custom Reports and that are automatically sent by email at a pre-defined schedule to any recipient or save into any specific folder or drive.                                                                                                                                                                                                                                                                                                                                                                                       |                     |
| 25   |                          | Supports instant diagnosis of the node status through Ping, Telnet and SNMPwalk.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |
| 26   |                          | Support Real-Time report generation for checking continuous reachability of target device.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                     |
| 27   |                          | System should provide many different types of topology representation. To perform the following :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |
|      |                          | 1. Display physical connections of the different devices being monitored in the system                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                     |
|      |                          | 2. Display flat maps of the entire network or networks in a single view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
|      |                          | 3. Display customer maps based on user configurations                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     |
|      |                          | 4. Display maps based on geo locations                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                     |
|      | Network Traffic Analysis |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                     |
| 28   |                          | The proposed monitoring solution should be able to monitor network traffic by capturing flow data from network devices, including Cisco Netflow v5 or v9, Juniper J- Flow, IPFIX, sFlow, NetStream data and also sampled Netflow data. Solution must be able to store ALL flows without any rollups or loss for retention period - for security and audit purposes.                                                                                                                                                                                                                                                                 |                     |

| SNo. | Parameter          | Specifications                                                                                                                                                                                   | Compliance (Yes/No) |
|------|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 29   |                    | Should identify which users, applications, protocols, countries, AS numbers, top routers, and top interfaces are consuming the most bandwidth                                                    |                     |
| 30   |                    | Proposed solutions should be sized for unlimited flow data.                                                                                                                                      |                     |
| 31   |                    | Should be able to associate traffic coming from different sources to application names                                                                                                           |                     |
| 32   |                    | Should be able to receive flows from non-SNMP-enabled devices, like VMware vSwitch                                                                                                               |                     |
| 33   |                    | Should monitor Type of Service (ToS), Differentiated Services Codepoint (DSCP), and Per-Hop Behaviour (PHB), BGP AS and NEXT HOP                                                                 |                     |
| 34   |                    | Should provide flow analysis with 1-minute granularity and The solution should be able to monitor up to 5 million flows per second, and should employ advanced optimization methods.             |                     |
| 35   |                    | Solution should support advanced SSL/TLS analysis like detecting false certificates, expired, self-signed.                                                                                       |                     |
| 36   |                    | Solution should also feature signature-based detection techniques and allow drilldown to packets from alerts.                                                                                    |                     |
| 37   |                    | Solution should provide DDoS reports in real time within 1 minute after detection of attack with details of IP, Ports, ASN numbers, Router Interfaces, Customers facing the attacks.             |                     |
|      | Service Management |                                                                                                                                                                                                  |                     |
| 38   |                    | Low Code /No Code Platform for Integration:                                                                                                                                                      |                     |
| 39   |                    | Tool should provide REST APIs to integrate with IT Infrastructure Management, Configuration Management, Network Management, CRM, SIEM tools to automate Events to Ticket.                        |                     |
| 40   |                    | The proposed tool must provide Dynamic REST/WEB API integration without writing any code, just by configuration on GUI with various inbuilt Authentication method.                               |                     |
| 41   |                    | Should be able to do 2 Way Integration with 3rd party and should be able to exchange the data at any stage of the lifecycle of the Event, Incident, Problem, Change, Request, Task, Release etc. |                     |
| 42   |                    | Tool should provide Drag and Drop based Workflow Process Design and No code Input Forms design                                                                                                   |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Compliance (Yes/No) |
|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | using Drag and Drop method for different processes, services and workflow                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |
| 43   |           | No code automation platform to support Rule executions (value based, Time based rule executions)                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
| 44   |           | Team/Individual Pressure/Load Score, Efficiency Score, Expertise Score should be present on Dashboard                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                     |
| 45   |           | Tool must provide intelligent Email-to-Incident feature in which tool admin has the option to allow certain domains for automatic conversion of emails to tickets. Tool should merge all subsequent email communication for a particular email-to-incident ticket into the same ticket in the form of a message thread. Tool should be intelligent enough to understand email conversation chains for merging emails to a particular incident. Merging logic should be not only based on TicketID but also on email sender, cc responses to that email chain |                     |
| 46   |           | Tool should be able to provide real-time Email, SMS Notification alerts to notify respective users about any changes in ticket state and status. Tool should provide Email Communication Interface to allow technicians to send replies to customers / end users from the tool GUI and Record all the Email Communication in Chronological Order                                                                                                                                                                                                             |                     |
| 47   |           | The integrated ITSM module should have its own Android & IOS app                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
| 48   |           | The proposed tool must provide GUI interface for users, requesters, customers, support staff, 3rd party vendors, Area Managers, Field Engineers, Site Engineers, Supervisors, Managers, (Helpdesk available 24x7 at customer site ) etc. with options to restrict amount of information that can be accessed by each role                                                                                                                                                                                                                                    |                     |
| 49   |           | The proposed tool should have the capability to be able to define and access the Business and Technical catalogue separately                                                                                                                                                                                                                                                                                                                                                                                                                                 |                     |
| 50   |           | The tool should allow the administrator to create categories and multiple sub-categories (under each category) in hierarchical order for services being offered to the end users.                                                                                                                                                                                                                                                                                                                                                                            |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                         | Compliance (Yes/No) |
|------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 51   |           | Tool should have option to define the workflow for each service created in the Service Catalog for each process (Incident, Problem, Change, Request)                                                                                                                                   |                     |
| 52   |           | The tool should provide a self service portal where End-users / requesters can log in and raise incidents                                                                                                                                                                              |                     |
| 53   |           | End user should also be able to browse the service catalogue and should be able to raise request by providing the input to particular service request, Address etc.                                                                                                                    |                     |
| 54   |           | The proposed tool must provide an option for users to track their incidents status, check knowledge articles and chat with technicians on particular incidents                                                                                                                         |                     |
| 55   |           | Users must have an option to Log, Classify, Categorize & Prioritize Requests                                                                                                                                                                                                           |                     |
| 56   |           | The proposed tool must provide an option to design the request management input parameter template for each service in service catalogue                                                                                                                                               |                     |
| 57   |           | The proposed tool must provide an option to design dynamic workflows, lifecycle, Tasks, Notification action for each service which can be requested                                                                                                                                    |                     |
| 58   |           | The proposed tool must record Problem Record Date and Time, Problem Source, Contact Detail, Symptoms and Status                                                                                                                                                                        |                     |
| 59   |           | Tool should allow problem records to be classified according to priority and category                                                                                                                                                                                                  |                     |
| 60   |           | Tool should allow a problem record to be escalated based on pre-established rules with option to manually overridden conditions                                                                                                                                                        |                     |
| 61   |           | Tool should allow users to create, edit & delete Change Request through web interface, Each CR should have Unique and any authorized user should be able to raise RFC                                                                                                                  |                     |
| 62   |           | The proposed tool must provide Change records Categorization, classification according to Change Class (Permanent, temporary, Recurring), Change Type (Normal, Standard, Expedited, Latent, Emergency), Change Category, service category, Impacted Service, Impact, Urgency, Priority |                     |
| 63   |           | The Change records in the proposed tool must contain State & Status information along with                                                                                                                                                                                             |                     |

| SNo.       | Parameter                                  | Specifications                                                                                                                                                                                                                            | Compliance (Yes/No) |
|------------|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|            |                                            | Dynamic Workflow definition with color coding for each status                                                                                                                                                                             |                     |
| 64         |                                            | There should be records for Benefits, Effects, and Required resources & Cost required to perform change                                                                                                                                   |                     |
| 65         |                                            | The proposed tool must have a powerful knowledge management functionality                                                                                                                                                                 |                     |
| 66         |                                            | Knowledgebase Management should be integrated with the NMS/EMS system                                                                                                                                                                     |                     |
| 67         |                                            | The proposed tool must provide Role based, Team Based & User Based access control on KB articles/FAQ/Information/KE/Solutions etc.                                                                                                        |                     |
| 68         |                                            | In FAQ/Solutions type of knowledge, system should allow to add multiple questions/multiple solutions within single knowledge article                                                                                                      |                     |
| 69         |                                            | Tool should have option to promote knowledge to analysts (Service Desk) and end users (Service Portal)                                                                                                                                    |                     |
| <b>68.</b> | <b>Geographic Information System (GIS)</b> |                                                                                                                                                                                                                                           |                     |
|            | Business Requirements of GIS for Project   |                                                                                                                                                                                                                                           |                     |
| 1          |                                            | The MSI shall provide Geographical Information System (GIS) to map physical locations of all the field components, location of incidents, locating site of faulty devices and corresponding geographic analysis etc. of the system.       |                     |
| 2          |                                            | The MSI shall undertake detail assessment for integration of the proposed system with the GIS system.                                                                                                                                     |                     |
| 3          |                                            | It should also help higher management of department, to analyse the events on a spatial perspective.                                                                                                                                      |                     |
| 4          |                                            | The GIS system - procurement of latest, base map from service provider like Here Map etc., shall be sole responsibility of the SI/contractor/bidder. The base map shall be with scale of 1:2000 for entire city jurisdiction of the city. |                     |
| 5          |                                            | Details of available layers related to administrative boundaries will be provided by Authority / department.                                                                                                                              |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                             | Compliance (Yes/No) |
|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 6    |           | The base map shall include rivers, water bodies, land use, land cover, Transport network (Rail and Road), POI. Administrative boundaries (districts, city, wards) for project requirements for entire City. All administrative boundaries shall be collected from Authority / departments. |                     |
| 7    |           | MSI is required to update GIS maps (including the additional layers of data as required for proposed solution) on annual basis.                                                                                                                                                            |                     |
| 8    |           | Necessary vector data, mapping of project proposed assets on separate GIS layers shall be sole responsibility of the SI/contractor/bidder.                                                                                                                                                 |                     |
| 9    |           | SI shall ensure that GIS application is integrated with Video analytics System to support the officials to navigate on the map and use it for better spatial understanding.                                                                                                                |                     |
| 10   |           | SI shall ensure that GIS application is integrated with PA System to support the officials to navigate on the map and use it for better spatial understanding.                                                                                                                             |                     |
| 11   |           | Use of GIS tool which allows easy map editing for wide area monitoring.                                                                                                                                                                                                                    |                     |
|      |           | Functional requirements of GIS                                                                                                                                                                                                                                                             |                     |
| 12   |           | The MSI shall accurately map the spatial attributes such as resources, objects, sensors and elements etc. on the map. It should provide an integrated dashboard with an easy to navigate user interface for managing different types of users and GIS based analysis.                      |                     |
| 13   |           | Basic Web GIS based functionality (Out of Box Dashboard, Ready for deployment)                                                                                                                                                                                                             |                     |
| 14   |           | 1) Layer Management: - The GIS application should have facilities to manage / group the layers. It should have options for displaying layers as display on or off. Further transparency and visibility scale shall be fixed for each layer.                                                |                     |
| 15   |           | 2) Measurement Tool: - This tool should help user to measure Length, Area over the map                                                                                                                                                                                                     |                     |
| 16   |           | 3) Identification Tool: - This tool should allow user to view details of the selected feature of the active layer on the map                                                                                                                                                               |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                   | Compliance (Yes/No) |
|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 17   |           | 4) Swipe Tool: - This tool should help user to view changes in between two active layers by swiping each other                                                                                                                                                                                                                                   |                     |
| 18   |           | 5) Navigation Tool: - Map displaying navigation tool includes display with different zoom function like fixed zoom, in/out zoom, by rectangle, by scale, to full extent, zoom to layer extent, zoom backward/forward, pan etc.                                                                                                                   |                     |
| 19   |           | 6) Query Tool: - Using this tool user can select feature in a layer using s SQL based expression as per layer attribute. It also has spatial query feature to select feature in between layers. And the quarried features can be exported as standard XLS, PDF, CSV formats.                                                                     |                     |
| 20   |           | 7) Bookmark Tool: - This tool should allow user to save particular zoom/location of layers over the map and revisit the same zoom/location.                                                                                                                                                                                                      |                     |
|      |           | Standard Web GIS based functionality                                                                                                                                                                                                                                                                                                             |                     |
| 21   |           | 1) Buffer Analysis: - This functionality should allow user to create buffer around a feature as per desired distance value and can get another feature from other available layers (i.e. road network, POI, Assets etc.). The result can be exported as standard XLS, PDF, CSV formats.                                                          |                     |
| 22   |           | 2) Overlay Analysis: - Overlay is a GIS operation that superimposes multiple data sets (representing different layers like administrative boundary, road network/node, land parcel, other proposed layer etc.) together for the purpose of identifying relationships between them. The result can be exported as standard XLS, PDF, CSV formats. |                     |
| 23   |           | 3) Proximity Analysis: - Using this functionality user can analyze locations of features by measuring the distance between them and other spatial features in the area (i.e. distance of road network from any GIS feature and other related spatial layer etc.). The result can be exported as standard XLS, PDF, CSV formats.                  |                     |
| 24   |           | 4) Network Analysis: - Using this functionality user can get optimum route between two points/nodes of network data (like road network and other                                                                                                                                                                                                 |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                | Compliance (Yes/No) |
|------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | related network spatial layer) layer and export it as standard XLS, PDF, CSV formats.                                                                                                                                                         |                     |
| 25   |           | 5) Map Print: - This tool help user to print map as per their requirement with proper scale and Symbology.                                                                                                                                    |                     |
| 26   |           | 6) Info-Graphics: - Shall be able to provide management with easy-to-understand, easy-to-use reports that use appropriate info graphics (Charts) to monitor the performance and usability of the project                                      |                     |
|      |           | Traffic Trend Analysis                                                                                                                                                                                                                        |                     |
| 27   |           | Heat map analysis to showing the trend of Traffic by using traffic Volume data (from ITMS application)                                                                                                                                        |                     |
| 28   |           | Re Routing In case of accident, emergency incident, GIS can suggest the alternate route                                                                                                                                                       |                     |
| 29   |           | Dissemination of customized Geo spatial information to concern stakeholders (Traffic Police, Municipal corporation & Others)                                                                                                                  |                     |
|      |           | Dashboard                                                                                                                                                                                                                                     |                     |
| 30   |           | Map Handling Module Map viewer will show all the roads within the municipal limits with footpath surface as well as it will show traffic lights as point location User can identify bus stand, bus route, and petrol pumps location on map.   |                     |
| 31   |           | Query Module With queries user can identify position of road divider, bus stand, bus routes, location of petrol pumps etc.                                                                                                                    |                     |
| 32   |           | Routing Network & Routing will enable user to find out alternative route in case of Jam, emergency or certain festivals (Integration with ITMS applications), user can also user routing for identifying routes of all petrol filling vehicle |                     |
| 33   |           | Spatial Query: Spatial analysis will enable user to get information of assets & relevant features based on selected area                                                                                                                      |                     |
| 34   |           | Reports It will be generated with query results                                                                                                                                                                                               |                     |
|      |           | Integration Scope                                                                                                                                                                                                                             |                     |
| 35   |           | The GIS application shall be integrated with ICCC to support the Control Centre and ICCC operator to navigate on the map and use it for better spatial understanding.                                                                         |                     |



| SNo. | Parameter                                                       | Specifications                                                                                                                                                                                                                                                            | Compliance (Yes/No) |
|------|-----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 36   |                                                                 | All the CCTV camera, and other sensor's locations shall be mapped on to the geospatial map as a separate GIS layer. Operator shall be able to see the video feed and other output from specific camera(s) / sensors by clicking on the camera icon on the geospatial map. |                     |
| 37   |                                                                 | The system shall have provision to visually display an alarming sensor on map and visually differentiate sensor alarm severities on map through different colour and icon identifiers.                                                                                    |                     |
| 38   |                                                                 | The ICCC operator shall have provision to view alarm details (including description, video, etc.) and investigate the alarm from the map                                                                                                                                  |                     |
| 39   |                                                                 | The system shall have provision view sensor and related name from the displayed map.                                                                                                                                                                                      |                     |
| 40   |                                                                 | The system shall allow map information to be displayed on the map including but not limited to                                                                                                                                                                            |                     |
| 41   |                                                                 | Sensors type and name                                                                                                                                                                                                                                                     |                     |
| 42   |                                                                 | Sensor range (e.g. camera – orientation, range, field of view angle)                                                                                                                                                                                                      |                     |
| 43   |                                                                 | Locations and zones                                                                                                                                                                                                                                                       |                     |
| 44   |                                                                 | Resource tracks                                                                                                                                                                                                                                                           |                     |
| 45   |                                                                 | Allow Authorized user to zoom in/out on different regions of map                                                                                                                                                                                                          |                     |
| 46   |                                                                 | The system shall have provision to have multiple layers on the map including                                                                                                                                                                                              |                     |
| 47   |                                                                 | Sensors, Cameras, VMS etc.                                                                                                                                                                                                                                                |                     |
| 48   |                                                                 | Incident intensity map in the city                                                                                                                                                                                                                                        |                     |
| 49   |                                                                 | Violation intensity map in the city                                                                                                                                                                                                                                       |                     |
| 50   |                                                                 | High Traffic Density map in the city                                                                                                                                                                                                                                      |                     |
| 51   |                                                                 | Filters for incidents / violation / traffic by road type, date, time, type, reason etc. on the Map                                                                                                                                                                        |                     |
| 52   |                                                                 | Major Buildings / Structures / Roads                                                                                                                                                                                                                                      |                     |
| 53   |                                                                 | Should support Geo Spatial Standards like GML & KML/KMZ etc                                                                                                                                                                                                               |                     |
|      | Specification of Cots Based GIS Enterprise and Desktop Platform |                                                                                                                                                                                                                                                                           |                     |
| 54   |                                                                 | To achieve this, department requires a deployment of a COTS GIS Enterprise & desktop platform. In                                                                                                                                                                         |                     |

| SNo. | Parameter                                       | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Compliance (Yes/No) |
|------|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                                 | Enterprise Platform, Server-side geo processing for spatial, non-spatial, Image analysis, 3D analysis is required for this project without any dependency over script or workflow generated from Desktop. This GIS enterprise platform should work as a base system for development and all required components i.e. GIS, Image Analysis should be get accessed by the end user at browser only. The Enterprise system should be GIS enabled system and capable of cataloguing and disseminating data through a web-based environment. The detailed technical specifications are provided below. |                     |
| 55   |                                                 | Software should be Fully Compliant Make in India product                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
| 56   |                                                 | Licensing policy should be open. No additional cost / authorization process is not required for redeploying it in new machine / cloud / VM. This shall provide flexibility to end customer. No restriction during hardware upgrade/ scaling in future                                                                                                                                                                                                                                                                                                                                            |                     |
| 57   |                                                 | The GIS server should have GIS, Image Processing and 3D components in a single deployed server only without any additional cost. There should be no dependency / importing functionalities from GIS Desktop for any tools. This component should run as Geo-processing at server side only.                                                                                                                                                                                                                                                                                                      |                     |
|      | The proposed solution should have               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| 58   |                                                 | GIS, Image Processing, 3D components with all extensions (Mentioned in below) in a single Deployed COTS Desktop Platform                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
| 59   |                                                 | GIS, Image Analysis, Processing and 3D components in Single deployed COTS based Enterprise Platform                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                     |
|      | Specifications for COTS GIS Enterprise Platform |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| 60   |                                                 | The proposed single deployed GIS Enterprise Platform should be Industry standard COTS GIS platform and must be OGC compliant. The proposed single deployed GIS platform should have all functions of GIS and Image analysis, geo-processing, classification, change detection, in a single installed software only. The platforms should                                                                                                                                                                                                                                                         |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Compliance (Yes/No) |
|------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | also have advance modules like network analysis, change detection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |
| 61   |           | The Proposed solution should be an integrated solution only having GIS, 3D Analytic and Image Processing components in single COTS Enterprise software. The overall proposed solution should be of Single GIS Platform only                                                                                                                                                                                                                                                                                                                                                                                                           |                     |
| 62   |           | The GIS Enterprise platform should have both GIS and Image analysis components, which going to be deployed at site. It should support 64 bits. It should be based on a Services Oriented Architecture (SOA). The Enterprise GIS software must be OGC certified and must have the capability to serve and consume OGC complied web services including WMS, WFS, WCS, CSW, INSPIRE, etc.                                                                                                                                                                                                                                                |                     |
| 63   |           | OEM undertaking should be submitted for further customization of application based on GIS and Image processing Custom based web application, as per project needs of present and future. No restriction during hardware upgrade/ scaling in future.                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| 64   |           | Server deployed Software should run as a native 64-bit application and should support Windows & Linux 64-bit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
| 65   |           | The deployed enterprise platform should have capabilities like geo-processing and analysis, spatial and statistics analysis and Image analysis functions. It should support server end Geo processing and Image analysis functions i.e. supervised classification, Enhancement, Vegetation Indices, Normalized Burn Ratio Index (NBRI), Normalized Difference Built-up Index (NDBI), buffer, clip, erase. Provision should be available by server for sending the request using the web client and display the processed data on web using OGC certified services. No dependency of Desktop tools or workflow generated from desktop. |                     |
| 66   |           | The web GIS application should open on any browser and should support cross platform. It should have Rest API for integration with other applications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Compliance (Yes/No) |
|------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 67   |           | The GIS Enterprise platform should provide a map centric for managing geospatial content of organization. It should serve as project centric approach to Create, Access, Analyse, Manage and disseminate geo-spatial content with capability of user management and role-based access control.                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                     |
| 68   |           | GIS Enterprise Platform should have rich display and navigation tools like zoom in, zoom out, fixed zoom in, fixed zoom out, pan, real time pan, bookmark, Geo link multiple views, swipe, flicker, search by location, cursor location value, etc.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
| 69   |           | The GIS enterprise software should support draping of vector and raster: WMS, WMTS, KML/KMZ. Facilities to view Shape File, DGN, GPX & Geo-tiff, TIF. Provision to process and display CEOS SLC and Hybrid Polarimetric data of SAR, DTED, DEM. It should support various data such as Terrain (DEM, Tiff, DTED etc.. ), BIM & CAD (Revit, CAD, 3D-Max, Sketch-up, Maya etc..), 3D Building and animation file i.e CZML Collada - *.dae, *.obj, *.gltf. Photogrammetry Meshes data derived from UAV. Display of model generated form Drone, Satellite Stereo Pairs, LiDAR, Point Clouds (LiDAR data *.las, *.laz). Support of Vector data (GeoJSON, KML, Shape etc.), OGC (WMS, WFS, WCS, etc.), Capable of consume multiple third party OGC map services for visualization |                     |
| 70   |           | It should have capability to import / export data in various formats like .dwg,dxf, .dgn, .shp (shape files), coverage file, .mif (MapInfo), .gml, .kml, .gpx, Geo PDF GeoJSON, H4, H5 formats, MBtiles etc. Should support ODBC compliance interface with industry standard RDBMS like PostGRE SQL, Oracle, SQL server, Access etc.                                                                                                                                                                                                                                                                                                                                                                                                                                        |                     |
| 71   |           | The deployed GIS enterprise Platform should have capabilities like geo processing and analysis, spatial and statistics analysis and Image processing functions in a single window. It should have out of box Geo processing and Image analysis functions like Clip, Erase, Spatial Join, Relate, Buffer, clip, erase, intersection, dissolve, union, summarize, Image classification for ex supervised, High pass,                                                                                                                                                                                                                                                                                                                                                          |                     |

| SNo. | Parameter                                    | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                      | Compliance (Yes/No) |
|------|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                              | Low Pass filter, NBRI, NDBI, 3D viewer with 3D based analytic tools as out of box functions.                                                                                                                                                                                                                                                                                                                                        |                     |
| 72   |                                              | Software should have the facility for reports generation, customized map layout, high resolution printing in different formats (jpg, pdf) with desired map scale and customized templates.                                                                                                                                                                                                                                          |                     |
| 73   |                                              | Should have capability to store the applied legend, colour, symbology and further applied in other GIS projects. Further, provision should be there to take backup of the project, export and import the custom annotation and labelling pattern from one project to other. Thematic mapping like Bivariate, Multi-bivariate, chart mapping should be available as out of box. Geocoding and Reverse Geocoding should be available. |                     |
| 74   |                                              | Integrated deployed Platform should support Time aware data for Trends / Time Series Analysis. Provision should be there for Online and Offline GPS integration.                                                                                                                                                                                                                                                                    |                     |
| 75   |                                              | It should have network analysis module to perform Routing analysis, Service Area Analysis, etc. Capabilities like Dynamic Labelling and Rule based Labelling should be available                                                                                                                                                                                                                                                    |                     |
| 76   |                                              | The software should have function to perform different operations like: mathematical, logical, string operations on the field of table of vector layer or selected objects of vector.                                                                                                                                                                                                                                               |                     |
| 77   |                                              | The integrated software should allow visualization of data in 2D/3D in enterprise application. Provision should be available to host the 3d project from to browser mode. Facilities to import Satellite images, LIDAR, Building model. The system should have facilities to store the 3d model which can be used in future without doing any pre-processing.                                                                       |                     |
|      | Specifications for COTS GIS Desktop Platform |                                                                                                                                                                                                                                                                                                                                                                                                                                     |                     |
| 78   |                                              | The proposed deployed COTS GIS Desktop Platform should be Industry standard COTS GIS platform and must be OGC compliant. The proposed deployed GIS platform should have all functions of GIS and Image feature extraction, geo-processing, image mosaicking, Photogrammetry, sub setting,                                                                                                                                           |                     |

| SNo. | Parameter                        | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Compliance (Yes/No) |
|------|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                  | classification (supervised, unsupervised) changes detection (In-built Image processing capability) in a software. The platform should also have advance modules like network analysis, terrain analysis.                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| 79   |                                  | The deployed Platform should have capabilities like geo-processing and analysis, spatial and statistics analysis and Image processing functions in a single window. It should have out of box Geo processing and Image analysis functions like Clip, Erase, Spatial Join, Relate, Buffer, clip, erase, intersection, dissolve, union, polyline to polygon, summarize, polygon auto numbering based on line feature and direction, Image classification(supervised, unsupervised), Image segmentation , Recode, Enhancement , Layer stacking, Geo-referencing , Collage Image, Mosaicking, High pass, Low Pass filter, Fast Fourier transformation as out of box functions |                     |
| 80   |                                  | The Proposed COTS Platform should have features of image analysis, spatial analysis, 3D analysis, Network analysis and Data Reviewer included without requiring any separate extension                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |
| 81   |                                  | The desktop software should be able to share 3D Tiles datasets as web layers to web platform.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
| 82   |                                  | To provide the capability to digitize three-dimensional (3D) feature data in a stereo viewing and mapping system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
| 83   |                                  | Should have capability to Compute 3D points from stereo pairs and outputs a point cloud as a set of LAS files                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
| 84   |                                  | The GIS Platform should have ready to use Pre Trained Deep Learning Models ready to be used in Server and desktop levels                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| 85   |                                  | The software should feature in built extension enabling the application of traditional AI techniques for spatial data generation, including extraction, classification, detection from both structured and unstructured data.                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
| 69.  | <b>Data Lake &amp; Analytics</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                     |
| 1    |                                  | Domain Compatibility: The proposed Data Lake solution shall provide analytics and insights to                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                    | Compliance (Yes/No) |
|------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | address business and operational challenges specific to smart city use cases                                                                                                                                                                                                                                                                                                      |                     |
| 2    |           | Data Ingestion: The platform shall efficiently ingest structured, semi-structured, unstructured, and streaming data from multiple sources. It shall support real-time ingestion of video, images, and metadata from approximately 2,600 cameras, ensuring scalable, high-throughput, and fault-tolerant pipelines with minimal latency for seamless data flow into the data lake. |                     |
| 3    |           | Data Storage and Management: The platform shall store and manage large volumes of structured, semi-structured, and unstructured data using scalable architectures such as data lakes, data warehouses, and NoSQL databases                                                                                                                                                        |                     |
| 4    |           | Data Processing and Analysis: The solution shall support complex data processing and analytical capabilities, including data cleaning, transformation, integration, aggregation, data mining, machine learning, and predictive analytics. Data processing and transformation will be performed for all 2,600 cameras/55 Use cases under the smart city infrastructure             |                     |
| 5    |           | Customizable Dashboards and Reporting: The platform shall provide interactive dashboards, visualizations, and reports, enabling users to explore data, analyze trends, and derive actionable insights to support informed business decision-making.                                                                                                                               |                     |
| 6    |           | Real-Time Analytics: The platform shall process and analyze data in real-time or near real-time to detect patterns, anomalies, and actionable opportunities, enabling timely insights and proactive decision-making.                                                                                                                                                              |                     |
| 7    |           | Data Lake Management: The platform shall provide a GUI-based solution to manage and monitor data lake clusters, infrastructure health, and services, with integrated alerting mechanisms for proactive issue detection and resolution                                                                                                                                             |                     |
| 8    |           | Integration and Interoperability: The platform shall support customizable, automated pipelines to integrate batch and streaming data from enterprise                                                                                                                                                                                                                              |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                               | Compliance (Yes/No) |
|------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | applications, databases, files, web applications, network devices, and sensor systems                                                                                                                                                                                                        |                     |
| 9    |           | Scalability and Performance: The platform shall support horizontal and vertical scaling to handle increasing data volumes, ensuring high performance, low latency, and fast, responsive analytics across all workloads                                                                       |                     |
| 10   |           | Data Governance: The platform shall enforce data governance policies including data quality, privacy, compliance, and lineage. It shall ensure secure, auditable access, encryption, and masking of sensitive data, accessible only by authorized users.                                     |                     |
| 11   |           | User Authentication and Security: The platform should be empowered by login screen should be CAPTCHA and OTP enabled for secure user login. Monitor privileged users, Capability to define clear roles and access management rules to User ID's                                              |                     |
| 12   |           | Fast Computation: The platform shall support in-memory processing and be capable of handling billions of records with high efficiency, ensuring low-latency computation and rapid data processing within milliseconds                                                                        |                     |
| 13   |           | Fault Tolerance: The platform shall automatically recover from failures or errors with minimal human intervention and support agentless discovery, ensuring high availability, reliability, and continuous system operations.                                                                |                     |
| 14   |           | User-Friendly Interface: The platform shall provide an intuitive and easy-to-use interface, enabling seamless navigation and customization to support diverse user roles, preferences, and operational requirements.                                                                         |                     |
| 15   |           | Backup and Restoration: The platform shall support backup and restoration of metadata and user data, ensuring data protection, integrity, and quick recovery in case of system failures or data loss.                                                                                        |                     |
| 16   |           | Metadata Management: The platform shall provide comprehensive metadata management capabilities, including data cataloguing, scheme management, data lineage tracking, and business glossary support to improve data discovery, understanding, and governance across the smart city ecosystem |                     |



| SNo. | Parameter                               | Specifications                                                                                                                                                                                                                                                                   | Compliance (Yes/No) |
|------|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 17   |                                         | Data Quality Management: The platform shall include automated data quality checks, validation rules, and profiling capabilities to ensure accuracy, completeness, consistency, and reliability of data ingested from multiple smart city sources, including camera and IoT data. |                     |
| 18   |                                         | API and Data Access Services: The platform shall provide secure and scalable APIs for data access and sharing, enabling seamless integration with external applications, dashboards, and third-party systems while enforcing access control and governance policies.             |                     |
| 19   |                                         | Data Lifecycle Management: The platform shall support data lifecycle management, including data retention, archival, and purging policies, ensuring efficient storage utilization and compliance with regulatory and organizational requirements.                                |                     |
|      | Distributed Data Lake & BI Capabilities |                                                                                                                                                                                                                                                                                  |                     |
| 20   |                                         | Distributed Architecture: The platform shall provide a distributed data lake architecture capable of storing and managing large volumes of data in a scalable and resilient manner.                                                                                              |                     |
| 21   |                                         | Scalability: The solution shall support horizontal scalability to handle increasing data volumes and concurrent users without performance degradation.                                                                                                                           |                     |
| 22   |                                         | High Availability: The platform shall ensure high availability with redundancy and failover mechanisms, ensuring uninterrupted data access even during hardware or network failures.                                                                                             |                     |
| 23   |                                         | Security and Authorization: The solution shall implement robust security mechanisms, including encryption, role-based access control, and auditing to prevent unauthorized data access.                                                                                          |                     |
| 24   |                                         | Data Partitioning and Optimization: The platform shall support intelligent data partitioning, indexing, and optimization techniques to improve query performance and efficient data retrieval.                                                                                   |                     |
| 25   |                                         | Data Replication: The solution shall support data replication across nodes or clusters to ensure data durability, fault tolerance, and high availability.                                                                                                                        |                     |

| SNo. | Parameter                                      | Specifications                                                                                                                                                               | Compliance (Yes/No) |
|------|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      | Business Intelligence & Dashboard Capabilities |                                                                                                                                                                              |                     |
| 26   |                                                | Multi-Source Data Integration: The dashboard shall support integration with multiple data sources such as databases, data lakes, and data warehouses.                        |                     |
| 27   |                                                | Customizable Dashboards: The platform shall allow users to customize dashboards, including layout, themes, visual styles, and configurations.                                |                     |
| 28   |                                                | Advanced Data Visualization: The solution shall support multiple visualization types, including charts, graphs, geospatial maps, and heatmaps for better insights            |                     |
| 29   |                                                | Unified Monitoring Interface: The platform shall provide a single interface to monitor faults, incidents, performance, and overall IT and network infrastructure.            |                     |
| 30   |                                                | Interactive Analytics: The dashboard shall support interactive features such as filtering, sorting, drill-down, and drill-through capabilities.                              |                     |
| 31   |                                                | Machine Learning Integration: The platform shall enable integration of ML models for predictive analytics and forecasting within dashboards.                                 |                     |
| 32   |                                                | Real-Time Analytics Visualization: The solution shall support real-time data processing and visualization for continuous monitoring and analysis.                            |                     |
| 33   |                                                | Role-Based Access Control: The dashboard shall enforce access control policies to restrict data visibility and functionality based on user roles                             |                     |
| 34   |                                                | Collaboration Features: The platform shall support collaboration by allowing users to share dashboards, reports, and insights securely.                                      |                     |
| 35   |                                                | Performance Monitoring Data Collection: The solution shall collect and store performance metrics across IT, network, and application layers for end-to-end monitoring.       |                     |
| 36   |                                                | Integration with Analytics Tools: The platform shall integrate with tools such as Jupyter Notebooks, Apache Spark, and streaming platforms for advanced analytics workflows. |                     |
| 37   |                                                | Alerting and Notifications: The system shall provide configurable alerts and notifications based on predefined thresholds and events.                                        |                     |

| SNo. | Parameter                          | Specifications                                                                                                                                                                            | Compliance (Yes/No) |
|------|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      | AI Ops & Intelligence Capabilities |                                                                                                                                                                                           |                     |
| 38   |                                    | Kubernetes-Native Deployment: The platform shall support seamless deployment of AI/ML models on Kubernetes-based environments for scalable and containerized execution.                   |                     |
| 39   |                                    | AI/ML-Based Real-Time Analytics: The solution shall enable real-time analytics for smart city use cases such as surveillance, law enforcement, waste management, and IoT data processing. |                     |
| 40   |                                    | Modular Architecture: The platform shall be built on a modular architecture, allowing flexible deployment and customization of components based on business requirements.                 |                     |
| 41   |                                    | End-to-End Pipeline Management: The solution shall support design, deployment, and management of complete ML pipelines.                                                                   |                     |
| 42   |                                    | Workflow Orchestration: The platform shall coordinate workflows across different stages of the ML lifecycle, ensuring seamless execution.                                                 |                     |
| 43   |                                    | Scalable Model Serving: The solution shall support scalable deployment and serving of AI/ML models across distributed environments.                                                       |                     |
| 44   |                                    | Model Version Control: The platform shall provide versioning capabilities for managing multiple versions of ML models.                                                                    |                     |
| 45   |                                    | Performance Monitoring: The system shall continuously monitor model performance and key evaluation metrics.                                                                               |                     |
| 46   |                                    | Model Metadata Management: The platform shall maintain metadata including model versions, dependencies, and configurations.                                                               |                     |
| 47   |                                    | Automated Data Pre-processing: The solution shall automate data preparation tasks such as cleaning, transformation, feature engineering, and handling missing values.                     |                     |
| 48   |                                    | Automated Model Selection: The platform shall automatically select appropriate models based on data characteristics and use case requirements.                                            |                     |
| 49   |                                    | Model Training Framework: The system shall support model training using techniques such as                                                                                                |                     |

| SNo. | Parameter | Specifications                                                                                                                                                    | Compliance (Yes/No) |
|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | cross-validation, training/testing split, and holdout validation.                                                                                                 |                     |
| 50   |           | Centralized Model Repository: The platform shall provide a centralized repository to store, manage, and retrieve trained models.                                  |                     |
| 51   |           | Hyperparameter Tuning: The solution shall support optimization techniques such as grid search, random search, and Bayesian optimization.                          |                     |
| 52   |           | Evaluation Metrics: The platform shall support evaluation metrics such as accuracy, precision, recall, F1-score, and AUC-ROC.                                     |                     |
| 53   |           | Automated Model Deployment: The solution shall enable automatic deployment of high-performing models into production environments.                                |                     |
| 54   |           | Model Lifecycle Management: The platform shall support continuous monitoring, retraining, and updating of models over time.                                       |                     |
| 55   |           | 60-Degree Governance: The system shall provide a unified view across multiple data sources, enabling surveillance, prediction, segmentation, and decision-making. |                     |
| 56   |           | Intelligent Predictive Maintenance: The solution shall predict equipment or system failures using machine learning-based anomaly detection.                       |                     |
| 57   |           | Anomaly Detection: The platform shall identify abnormal patterns in data to prevent incidents and improve operational efficiency.                                 |                     |
| 58   |           | Behavioral Analytics: The solution shall analyze user and system behavior to detect trends and anomalies.                                                         |                     |
| 59   |           | Pattern Recognition: The platform shall identify hidden patterns in large datasets for better insights and forecasting.                                           |                     |
| 60   |           | Event Correlation: The platform shall correlate multiple events and data sources to identify root causes of issues.                                               |                     |
| 61   |           | Adaptive Learning: The solution shall continuously improve model accuracy by learning from new data.                                                              |                     |
| 62   |           | Automated Alert Generation: The platform shall generate alerts based on anomalies, thresholds, and predictive insights.                                           |                     |

| SNo. | Parameter                                                 | Specifications                                                                                                                                                                                                                                         | Compliance (Yes/No) |
|------|-----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 63   |                                                           | Integration with Data Lake: The AI/ML capabilities shall be tightly integrated with the data lake to leverage centralized data for analytics and intelligence.                                                                                         |                     |
|      | Data Protection, Disaster Recovery & Data Lake Management |                                                                                                                                                                                                                                                        |                     |
| 64   |                                                           | Data Lake Backup & Restoration: The platform shall support backup and restoration of data lake user data, including replication across clusters or data centers. It shall support incremental backups, scheduling, retention policies, and encryption. |                     |
| 65   |                                                           | Application Backup & Restoration: The solution shall support backup and restoration of application data across RDBMS systems such as Oracle, MySQL, PostgreSQL, DB2, and MS SQL Server.                                                                |                     |
| 66   |                                                           | Flexible Configuration & Monitoring: The platform shall allow configurable backup and replication strategies, including full, incremental, and differential backups, along with monitoring of backup status, failures, and exceptions.                 |                     |
| 67   |                                                           | Disaster Recovery (DR): The solution shall support automated DC-DR synchronization across clusters or data centers with point-in-time recovery, replication scheduling, and data compression capabilities.                                             |                     |
| 68   |                                                           | Geo-Redundancy: The platform shall support geographically distributed data replication to ensure business continuity in case of regional failures.                                                                                                     |                     |
|      | Data Lake Management Capabilities                         |                                                                                                                                                                                                                                                        |                     |
| 69   |                                                           | Cluster Management: The platform shall provide a user-friendly interface for deploying, managing, and scaling data lake clusters, including node addition/removal, health monitoring, and upgrades.                                                    |                     |
| 70   |                                                           | Configuration Management: The solution shall provide centralized configuration management for all data lake services, enabling easy configuration updates and visibility across the cluster.                                                           |                     |
| 71   |                                                           | Service Management: The platform shall support management of big data services such as HDFS,                                                                                                                                                           |                     |

| SNo. | Parameter                           | Specifications                                                                                                                                                                                          | Compliance (Yes/No) |
|------|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                     | YARN, MapReduce, Hive, HBase, NiFi, Kafka, and Spark through a unified interface.                                                                                                                       |                     |
| 72   |                                     | Metrics Collection and Monitoring: The system shall collect and display metrics related to resource utilization, network performance, and service health, with visualization and alerting capabilities. |                     |
| 73   |                                     | Role-Based Access Control (RBAC): The platform shall provide fine-grained access control mechanisms to manage user roles and permissions securely.                                                      |                     |
| 74   |                                     | Stack Management: The solution shall support multiple open-source data platform stacks and allow customization of stack configurations based on requirements.                                           |                     |
| 75   |                                     | Directory Integration: The platform shall integrate with enterprise identity systems such as LDAP and Active Directory, including Azure AD supp                                                         |                     |
|      | Proactive Monitoring & Intelligence |                                                                                                                                                                                                         |                     |
| 76   |                                     | Proactive Monitoring: The platform shall continuously monitor cluster metrics such as node health, resource utilization, network activity, and job execution statistics.                                |                     |
| 77   |                                     | Time-Series Analysis: The system shall analyze historical performance data to identify trends and patterns related to system behavior and failures.                                                     |                     |
| 78   |                                     | Failure Detection & Root Cause Analysis (RCA): The solution shall analyze historical and real-time data to identify root causes of failures and recurring issues.                                       |                     |
| 79   |                                     | Anomaly Detection: The platform shall use machine learning models to detect anomalies and deviations from normal system behavior.                                                                       |                     |
| 80   |                                     | Fault Prediction: The solution shall provide predictive analytics to forecast potential system issues based on historical patterns and correlations.                                                    |                     |
| 81   |                                     | Dynamic Threshold Management: The system shall support adaptive thresholding to adjust alert thresholds based on workload patterns and environmental changes.                                           |                     |
| 82   |                                     | Real-Time Alerts & Notifications: The platform shall provide real-time alerts via email or integrated                                                                                                   |                     |

| SNo. | Parameter           | Specifications                                                                                                                                                                                                                                                                    | Compliance (Yes/No) |
|------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                     | ticketing systems when anomalies or failures are detected.                                                                                                                                                                                                                        |                     |
| 83   |                     | Capacity Planning & Forecasting: The solution shall provide predictive insights for storage, compute, and network capacity planning.                                                                                                                                              |                     |
| 84   |                     | Audit Logging & Compliance Tracking: The platform shall maintain detailed logs for all administrative and operational activities to support compliance and audits.                                                                                                                |                     |
| 85   |                     | Multi-Cluster Management: The solution shall support centralized management of multiple data lake clusters across environments.                                                                                                                                                   |                     |
| 86   |                     | Data Integrity Validation: The platform shall ensure data consistency and integrity through validation mechanisms during backup, replication, and restoration processes.                                                                                                          |                     |
|      | Workflow Management |                                                                                                                                                                                                                                                                                   |                     |
| 87   |                     | Batch Pipeline Processing: The platform shall ingest data from multiple batch sources into storage systems such as data lakes, data warehouses, or file systems. It shall support formats including CSV, ORC, and Parquet with incremental data loading capabilities.             |                     |
| 88   |                     | Stream Processing Pipeline: The platform shall enable real-time data ingestion and processing from sources such as sensors, logs, and external systems using streaming platforms. It shall support filtering, transformation, aggregation, and analytics for real-time use cases. |                     |
| 89   |                     | Job Scheduling and Orchestration: The platform shall include a job scheduler to execute workflows based on dependencies, priorities, and resource availability.                                                                                                                   |                     |
| 90   |                     | Resource Allocation: The platform shall allocate compute resources such as CPU, memory, and storage dynamically based on job requirements.                                                                                                                                        |                     |
| 91   |                     | Job Monitoring and Logging: The platform shall monitor workflows and capture execution status, logs, errors, and performance metrics.                                                                                                                                             |                     |
| 92   |                     | Job Prioritization: The platform shall prioritize jobs based on business importance and resource requirements.                                                                                                                                                                    |                     |

| SNo. | Parameter                                     | Specifications                                                                                                                                                        | Compliance (Yes/No) |
|------|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 93   |                                               | Notifications and Alerts: The platform shall provide notifications and alerts for job completion, failures, and exceptions.                                           |                     |
| 94   |                                               | Scalability: The workflow engine shall scale horizontally to handle large volumes of jobs and workflows across multiple clusters.                                     |                     |
|      | Data Exploration & Intelligence               |                                                                                                                                                                       |                     |
| 95   |                                               | Data Exploration and Visualization: The platform shall provide interactive dashboards, charts, and visualization tools with filtering and drill-down capabilities.    |                     |
| 96   |                                               | Collaborative Analytics: The platform shall enable sharing of dashboards, reports, and datasets for collaborative analysis.                                           |                     |
| 97   |                                               | Intelligent Business Insights: The platform shall leverage machine learning to generate predictive and actionable insights.                                           |                     |
| 98   |                                               | Use Case Enablement: The platform shall enable multiple smart city use cases through integrated analytics.                                                            |                     |
| 99   |                                               | Visualization Capabilities: The platform shall support visualization types including bar, pie, line, heat map, scatter, table, temporal heatmap, and advanced search. |                     |
| 100  |                                               | Pre-Built BI Dashboards and Widgets: The platform shall provide preconfigured dashboards and analytics widgets as out-of-the-box features.                            |                     |
| 101  |                                               | Dynamic Dashboard Filtering: The platform shall enable automatic filtering and interaction across dashboard components.                                               |                     |
| 102  |                                               | System Sizing: The platform shall be sized based on available data sources and integration requirements.                                                              |                     |
| 103  |                                               | Data Volume Handling: The platform shall support a minimum data capacity of 50 TB with scalability for future growth.                                                 |                     |
|      | Use Cases, AI/ML Analytics & BI Visualization |                                                                                                                                                                       |                     |
| 104  |                                               | Business Intelligence Reporting: The platform shall enable collation of data from multiple sources and                                                                |                     |



| SNo.       | Parameter                            | Specifications                                                                                                                                                                                                                                                                                                                                                                                                         | Compliance (Yes/No) |
|------------|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|            |                                      | generation of comprehensive BI reports to support data-driven decision-making across smart city operations.                                                                                                                                                                                                                                                                                                            |                     |
| 105        |                                      | KPI Dashboard and Visualization: The platform shall provide development of static and dynamic dashboards, including KPI visualization, enabling real-time monitoring and performance tracking.                                                                                                                                                                                                                         |                     |
| 106        |                                      | Predictive Analytics (AI/ML Use Cases): The platform shall leverage historical data and pattern analysis to build predictive models capable of forecasting future outcomes and identifying potential issues based on trends and correlations.                                                                                                                                                                          |                     |
| 107        |                                      | 360-Degree Governance View: The platform shall provide a unified 360-degree view by integrating data from multiple sources and applying advanced analytics for use cases such as law enforcement, smart surveillance, prediction, and enhanced city services.                                                                                                                                                          |                     |
| 108        |                                      | Drill-Down and Ad-Hoc Analysis: The platform shall enable users to perform drill-down analysis and ad-hoc querying for deeper insights into data trends and patterns.                                                                                                                                                                                                                                                  |                     |
| 109        |                                      | Real-Time Decision Support: The platform shall provide real-time insights and alerts to support proactive decision-making and incident response.                                                                                                                                                                                                                                                                       |                     |
| 110        |                                      | Automated Reporting: The platform shall generate automated, scheduled, and on-demand reports with configurable formats and distribution mechanisms.                                                                                                                                                                                                                                                                    |                     |
| <b>70.</b> | <b>Digital Twin for Kumbh Area</b>   |                                                                                                                                                                                                                                                                                                                                                                                                                        |                     |
| 1          | Digital Twin Platform & Architecture | The Digital Twin solution shall provide a real-time digital representation of the city's physical assets and surrounding environment by continuously ingesting data from connected sensors, cameras, IoT devices, and integrated city systems. The platform shall maintain synchronization between the physical and virtual models wherever such data sources exist, ensuring the twin remains current and actionable. |                     |

| SNo. | Parameter                       | Specifications                                                                                                                                                                                                                                                                                         | Compliance (Yes/No) |
|------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                 | The solution should be implemented on an open, modular and distributed architecture, avoiding proprietary dependencies.                                                                                                                                                                                |                     |
|      |                                 | The platform shall support both cloud and on-premises deployments (cloud-native/hybrid architecture) and shall leverage containerization and microservices to ensure scalability and flexibility.                                                                                                      |                     |
|      |                                 | The system must support horizontal scaling and load balancing, capable of handling large volumes of IoT data and concurrent users without performance degradation.                                                                                                                                     |                     |
|      |                                 | It shall provide high availability and redundancy (no single point of failure), with support for failover clustering to meet 24/7 operational requirements.                                                                                                                                            |                     |
|      |                                 | The platform shall implement robust security measures across all components, including user authentication, role-based authorization, and data encryption in transit and at rest.                                                                                                                      |                     |
|      |                                 | The system shall be designed to accommodate future expansion, allowing integration of new sensor types, additional city zones, and new functional modules without significant changes to the core system.                                                                                              |                     |
|      |                                 | The solution should adhere to relevant industry standards and best practices for system architecture and cybersecurity (ISO 27001, SOC2 Type 1 & 2) to ensure a secure and reliable operation.                                                                                                         |                     |
| 2    | IoT and Sensor Data Integration | The system shall ingest real-time data from diverse IoT sensors and data sources deployed in the city, including but not limited to crowd density sensors, footfall counters, air quality monitors, noise level sensors, energy meters, traffic detectors, weather stations, and surveillance systems. |                     |
|      |                                 | It should support industry-standard IoT communication protocols and data formats (such as MQTT, HTTP/REST, WebSockets, JSON, etc.) for seamless integration with various sensors and IoT gateways.                                                                                                     |                     |
|      |                                 | The platform must be capable of processing streaming data at scale, with minimal latency, so that updates in sensor readings and events are                                                                                                                                                            |                     |

| SNo. | Parameter                      | Specifications                                                                                                                                                                                                                                                                                   | Compliance (Yes/No) |
|------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                | reflected on the digital twin visualization in near real-time.                                                                                                                                                                                                                                   |                     |
|      |                                | The solution shall allow bi-directional integration where appropriate, enabling the digital twin platform not only to receive data from sensors but also to send control commands or configuration updates to IoT devices (e.g., actuators, smart lighting systems) through supported protocols. |                     |
|      |                                | The system should provide connectors or adapters to integrate with existing city IoT platforms or middleware (for instance, integration via open APIs or SDKs with city data platforms, command & control systems, or enterprise service buses).                                                 |                     |
| 3    | 3D/2D Geospatial Visualization | The platform shall offer both 2D and 3D geospatial visualization capabilities for the city digital twin, including interactive maps and high-fidelity 3D models of city infrastructure and assets.                                                                                               |                     |
|      |                                | Users should be able to navigate the virtual city easily (pan, zoom, rotate in 3D) and visualize various assets like roads, buildings, parks, utilities, and IoT device locations in their geospatial context.                                                                                   |                     |
|      |                                | The system should allow overlay of real-time data and sensor statuses on the map/model (e.g., showing live traffic conditions, crowd heatmaps, air quality index per zone, etc.), with intuitive icons or color-coding for different status or alert levels.                                     |                     |
|      |                                | It shall support multiple map layers and thematic views (for example, a traffic layer, an environmental sensor layer, utility network layer, etc.), which can be toggled by the user for clarity.                                                                                                |                     |
|      |                                | The visualization module must support importing and displaying standard geospatial and 3D data formats (such as shapefiles, GeoJSON, KML for maps; CityGML, IFC or glTF for 3D city models), ensuring interoperability with existing city data sources.                                          |                     |
|      |                                | The platform should provide the ability to drill down from city-wide view to specific facilities or buildings (and even floor-level details if available), seamlessly transitioning between different levels of detail in the digital twin.                                                      |                     |

| SNo. | Parameter                                           | Specifications                                                                                                                                                                                                                                                                                                                                                                                    | Compliance (Yes/No) |
|------|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 4    | Simulation & Predictive Analytics                   | The Digital Twin solution shall include simulation tools to model and analyze hypothetical scenarios in the urban environment (e.g., simulating traffic rerouting, new infrastructure development, emergency evacuations, or public event crowd management) before those changes are implemented in the real world.                                                                               |                     |
|      |                                                     | The system should leverage historical and real-time data along with AI/ML algorithms to perform predictive analytics, forecasting future trends such as traffic congestion, public transport ridership, energy consumption, or environmental quality under various conditions.                                                                                                                    |                     |
|      |                                                     | Users shall be able to run "what-if" analyses by adjusting input parameters (such as the timing of traffic signals, availability of transit routes, or occupancy limits of a public venue) and the platform will project the outcomes on key metrics and city KPIs.                                                                                                                               |                     |
|      |                                                     | The platform shall support predictive maintenance use cases by analyzing data from sensors, cameras, public address (PA) systems, and emergency call boxes (SOS), as well as other connected assets such as water pumps, power grids, and transit vehicles. The system shall leverage AI/ML models to predict potential failures or maintenance needs and proactively alert operators in advance. |                     |
|      |                                                     | Simulation and analytics results should be presented within the platform via visual dashboards or reports, and the system should allow exporting these results for further analysis or presentation.                                                                                                                                                                                              |                     |
| 5    | Interoperability (GIS, BIM, SCADA & Legacy Systems) | The solution shall integrate with Geographic Information System (GIS) platforms to import, overlay, and export geospatial data. It should support standard GIS services and formats (WMS/WMTS for map tiles, WFS for features) allowing use of existing city maps and spatial datasets in the digital twin.                                                                                       |                     |
|      |                                                     | The platform shall support integration of Building Information Modeling (BIM) data for incorporating detailed 3D models of buildings and infrastructure. It should accept standard BIM files (e.g., IFC format)                                                                                                                                                                                   |                     |

| SNo. | Parameter                              | Specifications                                                                                                                                                                                                                                                                                                                                                    | Compliance (Yes/No) |
|------|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                        | and convert them into the digital twin environment for visualization and analysis.                                                                                                                                                                                                                                                                                |                     |
|      |                                        | The system should provide interfaces to SCADA systems and other industrial control or operational systems used by city utilities (power, water, transportation). This includes support for relevant protocols or APIs (for example, OPC UA for industrial data, or API connectors to specific SCADA software) to ingest real-time operational data into the twin. |                     |
|      |                                        | The digital twin platform must allow integration with legacy databases and applications used by various city departments. For instance, it should be able to consume data from CSV/Excel files, SQL databases, or existing city management systems to ensure all relevant data can be unified in the twin.                                                        |                     |
|      |                                        | Emphasis is on open standards and data exchange: the solution should avoid proprietary data lock-in, and instead utilize widely-adopted data standards and ontologies for smart city data, facilitating easier integration and future interoperability.                                                                                                           |                     |
| 6    | Role-Based User Interface & Dashboards | The system shall provide a comprehensive, intuitive dashboard interface for monitoring the city's digital twin, accessible through standard web browsers (and optionally via a mobile application for remote access).                                                                                                                                             |                     |
|      |                                        | It should support multiple user roles (e.g., administrator, operator, city planner, emergency responder), with role-based access control to ensure each user sees and interacts with data relevant to their authority and needs.                                                                                                                                  |                     |
|      |                                        | Users should be able to customize their dashboard view by selecting relevant data widgets, maps, 3D views, charts, and KPIs to display. The interface should support configuration of these elements without requiring developer intervention.                                                                                                                    |                     |
|      |                                        | The solution's UI/UX must support real-time updates (e.g., live dashboards that update automatically as new data comes in, without manual refresh) to allow operators to respond quickly to changing conditions.                                                                                                                                                  |                     |
|      |                                        | The application should support multi-language user interface options (at minimum English, and                                                                                                                                                                                                                                                                     |                     |

| SNo. | Parameter                        | Specifications                                                                                                                                                                                                                                                                                                                      | Compliance (Yes/No) |
|------|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                  | optionally local languages as required), so that it can be used by officials in their preferred language.                                                                                                                                                                                                                           |                     |
|      |                                  | For mobility and ease of access, the platform should provide either a responsive web design or dedicated mobile app that allows authorized users to view alerts and key data from the digital twin on tablets or smartphones.                                                                                                       |                     |
| 7    | API and Integration Capabilities | The digital twin platform shall expose a robust set of APIs for external integration, enabling third-party systems and developers to interact with the platform's data and functionalities. These should include RESTful APIs (HTTPS/JSON) for querying data and sending commands into the system.                                  |                     |
|      |                                  | APIs should allow retrieval of both real-time status and historical data from the digital twin, including the ability to query sensor values, asset status, alerts, and simulation results.                                                                                                                                         |                     |
|      |                                  | Webhook or publish/subscribe mechanisms (such as MQTT topics or WebSocket streams) should be available for pushing real-time events and updates from the digital twin to subscribing systems, ensuring external applications can get instantaneous updates.                                                                         |                     |
|      |                                  | The platform's APIs must be well-documented and secured (with authentication tokens, API keys or OAuth 2.0 mechanisms, and role-based permission checks for each endpoint). All data exchange should enforce encryption (TLS) to protect data in transit.                                                                           |                     |
|      |                                  | The system should utilize open data schemas and standards in its API payloads and data storage, wherever applicable (for example, using GeoJSON for spatial data, adhering to IoT data models like oneM2M or FIWARE NGSI-LD for context data), to maximize compatibility with external tools and adherence to smart city standards. |                     |
| 8    | Scalability & Performance        | The solution architecture shall be capable of scaling to city-wide deployments, handling thousands of sensor inputs and events per second, and supporting a large number of simultaneous users monitoring the system.                                                                                                               |                     |
|      |                                  | The system should support horizontal scalability (adding more servers/instances to handle increased                                                                                                                                                                                                                                 |                     |

| SNo. | Parameter                       | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                            | Compliance (Yes/No) |
|------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                 | load) without significant downtime or reconfiguration, ideally using cloud-native scaling features if deployed on cloud infrastructure.                                                                                                                                                                                                                                                                                                                   |                     |
|      |                                 | Performance should be optimized so that typical user interactions (loading dashboards, running a simulation, retrieving data) occur with minimal latency. The UI should load within a few seconds even as data volume grows, and real-time data points should reflect on the dashboard with a delay of no more than a few seconds from live generation.                                                                                                   |                     |
|      |                                 | The platform must support high-volume data storage and efficient retrieval (using big data technologies or time-series databases) to ensure historical data queries and analytics do not hinder real-time performance.                                                                                                                                                                                                                                    |                     |
|      |                                 | It should also be resilient under heavy load or network issues, ensuring graceful degradation (the system remains operational at reduced capacity rather than failing outright in extreme conditions).                                                                                                                                                                                                                                                    |                     |
| 9    | Data Management & Normalization | The platform shall be able to ingest data from heterogeneous sources and normalize it into a unified data model, so that data from various sensors and systems can be compared and analyzed coherently even if they originate in different formats or units.                                                                                                                                                                                              |                     |
|      |                                 | All incoming data should be tagged with time stamps, source identifiers, and geo-location (if applicable) and stored in a centralized data repository, forming a coherent spatio-temporal database of the city's operational data.                                                                                                                                                                                                                        |                     |
|      |                                 | The system shall support long-term data storage and trend analysis with efficient indexing and querying capabilities. The platform shall retain at least one (1) year of data in the live database for immediate access, while archiving an additional four (4) years of historical data in the archive database. The system shall provide configurable options to archive, retrieve, or purge data in line with organizational data management policies. |                     |
|      |                                 | Data integrity and quality must be maintained through validation rules and filtering of anomalous or corrupt data. The system should log data                                                                                                                                                                                                                                                                                                             |                     |

| SNo. | Parameter                 | Specifications                                                                                                                                                                                                                                                                                                                                                         | Compliance (Yes/No) |
|------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                           | ingestion status and provide diagnostics for any data source that falls out of expected ranges or becomes unavailable.                                                                                                                                                                                                                                                 |                     |
|      |                           | The data model of the digital twin should be extensible, allowing new types of data or assets to be added (with their attributes and relationships) without refactoring the entire system. This ensures that as city needs evolve, the digital twin's data schema can adapt accordingly.                                                                               |                     |
| 10   | Alerts and KPI Monitoring | The digital twin solution shall provide a configurable alerting mechanism that monitors incoming data and system events against predefined thresholds or conditions. When conditions are met (e.g., air quality index exceeding a safe limit, crowd density above threshold, device failure detected), the system should automatically generate an alert in real-time. |                     |
|      |                           | Users should be able to define and customize alert rules (including compound conditions combining multiple data points) through the interface, without requiring programming. Each alert type should allow configuration of severity level, responsible personnel or group, and the notification method.                                                               |                     |
|      |                           | The system shall support multiple notification channels for alerts, such as on-screen popups in the command center dashboard, email and SMS notifications, and push notifications on the mobile app, ensuring timely awareness of critical events.                                                                                                                     |                     |
|      |                           | The platform should include a KPI management dashboard where key performance indicators related to city operations (e.g., average response time to incidents, daily energy consumption, percentage of green cover, etc.) can be defined, calculated from the underlying data, and visualized.                                                                          |                     |
|      |                           | Users (with appropriate permissions) should be able to configure which KPIs are tracked and how they are calculated (selecting data sources and formulas) and set target values or thresholds for each KPI. The system should visually indicate the status of each KPI against its target (e.g., using color codes or trend arrows).                                   |                     |



| SNo. | Parameter                           | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Compliance (Yes/No) |
|------|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |                                     | The solution should provide reporting capabilities, enabling extraction of periodic reports on alerts (e.g., weekly summary of all alerts, with response times) and KPI trends (e.g., monthly performance reports), to support management reviews and compliance reporting.                                                                                                                                                                                                                                                                                                                                                                                                           |                     |
| 11   | Natural Language Processing Support | The platform shall provide a conversational AI capability that enables users to query system information, alerts, and key performance indicators (KPIs) using natural language input. The conversational interface shall interpret user intent, retrieve relevant real-time or historical data from the platform, and return accurate, contextual responses without requiring users to navigate dashboards or perform manual searches. The feature shall support authorized access, respect user roles and permissions, and operate across all configured modules within the solution (e.g., operations, service performance, queue analytics, asset status, or other platform KPIs). |                     |
| 12   | Vulnerability Testing               | The system shall be certified on 'VAPT' (Vulnerability Assessment and Penetration Testing).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                     |
| 13   |                                     | The GIS software must also support Photogrammetry for drone, aerial and high-resolution satellite images.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
| 14   |                                     | It must support generating DEM, True-Ortho, 3D Mesh model and 3D Gaussian Splats automatically                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                     |
| 15   |                                     | It must read the images from World View 3 and 4, Legion and other Maxar imagery directly from the folders for Reality mapping. It must also support images from other satellite makes such as Airbus, Planet, BlackSky, Kompsat, etc..                                                                                                                                                                                                                                                                                                                                                                                                                                                |                     |
| 16   |                                     | It must support processing of drone/ aerial imageries from single as well as multi-headed oblique sensors to generate accurate True-Orthos and photorealistic 3D Mesh models.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
| 17   |                                     | It must have the facility to generate Tie points automatically and edit tie points manually.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                     |
| 18   |                                     | It must generate a detailed processing report to validate input parameters, accuracy statement, etc..                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                     |
| 19   |                                     | It must generate True-Ortho in TIFF format and Mesh models in SLPK, OBJ and 3D Tiles format.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                     |

| SNo. | Parameter | Specifications                                                                                                                                                | Compliance (Yes/No) |
|------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 20   |           | It must have all the photogrammetric functionalities within the same GIS application with the same GUI as the GIS desktop application.                        |                     |
| 21   |           | It must also have the toolsets to extract 3D vector features from the reality mapping outputs within the same GIS application.                                |                     |
| 22   |           | The software must support publishing the outputs such as True-Ortho and Mesh models as tile, image and scene layers directly to the Enterprise GIS. proposed. |                     |
| 23   |           | The software should provide a digital representation (digital twin) of the city, where all urban developments are visualized in one place.                    |                     |
| 24   |           | It should allow users to visualize citywide plans and projects in a unified interface.                                                                        |                     |
| 25   |           | The platform should support uploading and managing 3D models as part of a centralized 3D system of record.                                                    |                     |
| 26   |           | It should allow integration of images (e.g., blueprints) into projects.                                                                                       |                     |
| 27   |           | The software should support rich 3D scene editing, including adding and enhancing buildings and environments.                                                 |                     |
| 28   |           | The software should allow users to import and configure data within the urban model.                                                                          |                     |
| 29   |           | It should support integration with BIM tools (e.g., Revit, IFC formats) for detailed building planning.                                                       |                     |
| 30   |           | The platform should maintain a centralized repository for models, plans, and project data.                                                                    |                     |
| 31   |           | The platform should allow stakeholders to collaborate on shared citywide plans and projects.                                                                  |                     |
| 32   |           | It should support open discussions and scenario evaluations within user groups.                                                                               |                     |
| 33   |           | The software should provide tools to gather feedback from stakeholders and the public on shared plans.                                                        |                     |
| 34   |           | Software should support importing and exporting multiple 3D and CAD formats including OBJ, FBX, DAE, DXF, DWG, IFC, KML, and KMZ.                             |                     |
| 35   |           | Software should support exporting models with textures organized into reusable folders for easy sharing across platforms.                                     |                     |

| SNo.       | Parameter                                 | Specifications                                                                                                                                                                                                                                                           | Compliance (Yes/No) |
|------------|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 36         |                                           | Software should support exporting scenes and models to formats such as images, web scenes, and 360°/VR-ready outputs.                                                                                                                                                    |                     |
| 37         |                                           | Software should allow customization of export processes, including adding metadata and instancing information using Python scripts.                                                                                                                                      |                     |
| 38         |                                           | Software should support exporting models to game engines such as Unity and Unreal Engine for immersive visualization.                                                                                                                                                    |                     |
| 39         |                                           | Software should support real-time 3D visualization of urban environments for design evaluation and presentation.                                                                                                                                                         |                     |
| 40         |                                           | Software should support rapid generation of urban design scenarios using procedural rules and GIS data.                                                                                                                                                                  |                     |
| 41         |                                           | Software should support handling and visualization of large-scale city models efficiently.                                                                                                                                                                               |                     |
| 42         |                                           | Software should support basic visual analysis within the 3D environment using rule-based logic.                                                                                                                                                                          |                     |
| <b>71.</b> | <b>Mobile App for Pilgrims / Visitors</b> | <b>This is to be provided complimentary</b>                                                                                                                                                                                                                              |                     |
|            | Engagement Application                    |                                                                                                                                                                                                                                                                          |                     |
| 1          |                                           | The application shall accept requests or inquiries from the citizens and track those requests from different channels of Web Portal, Smart Phone Application (City App) & social media (Facebook, Twitter.)                                                              |                     |
| 2          |                                           | Solution should support in handling all service requests through portal and Mobile App for efficiently managing the citizen grievance request                                                                                                                            |                     |
| 3          |                                           | The operator should be able to chat/reply to any queries raised through mentioned channels via the same channel, including pilgrim assistance and emergency guidance.                                                                                                    |                     |
| 4          |                                           | The application shall allow the user to select service request category type or use auto-filled profile and GPS location information for incident creation. A unique service transaction number should be assigned for each incident after a service request is created. |                     |
| 5          |                                           | The application shall capture different types of input data, including but not limited to: date,                                                                                                                                                                         |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                  | Compliance (Yes/No) |
|------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |           | Citizen/pilgrim contact detail issue type, issue description, time of day the grievance occurred, exact pilgrimage location (ghat/sector/camp/route), etc.                                                                                                                                                                                                                      |                     |
| 6    |           | The platform shall provide GIS-based visualization of service requests over a city base map integrated with large-gathering operational layers (such as Kumbh sectors), including ghats, camps, routes, medical facilities, police posts, and public amenities, with the capability to display service request details and related operational information directly on the map. |                     |
| 7    |           | The application should provide information regarding the exact geo-location of the service request to enable faster field response during dense pilgrim gatherings.                                                                                                                                                                                                             |                     |
| 8    |           | The application must have the ability to display the citizen's or pilgrim's previous interactions from different channels and view previous service request status.                                                                                                                                                                                                             |                     |
| 9    |           | The application should have the ability to display "top" grievance types based on historical trends ranked according to the most viewed and most relevant service request.                                                                                                                                                                                                      |                     |
| 10   |           | The application should have the ability to view and attach files such as images, videos and voice recordings from pilgrims, PDFs, and other supporting document                                                                                                                                                                                                                 |                     |
| 11   |           | The application should prevent a request from being closed until all associated actions are completed, ensuring accountability for critical pilgrim safety and service incidents                                                                                                                                                                                                |                     |
| 12   |           | The application should have the ability to dispatch a service request to the workforce, department, external agency, or Kumbh field response team through ICCC integration.                                                                                                                                                                                                     |                     |
| 13   |           | The application should provide a set of standard reports that will provide statistical reporting for open, closed, escalated, priority, completion time, based on address/ghats and location.                                                                                                                                                                                   |                     |
| 14   |           | The dashboard module should provide a quick and easy view of overall grievance details including                                                                                                                                                                                                                                                                                |                     |

| SNo. | Parameter  | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Compliance (Yes/No) |
|------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|      |            | pilgrim incident trends, crowd-day spikes, departmental response efficiency, and feedback analytics integrated with ICCC.                                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |
| 15   |            | The application should allow the administrator to define SLAs for all the incidents.                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
| 16   |            | The application should allow the administrator to add, edit, and delete various departments, including temporary large operational units and volunteer agencies.                                                                                                                                                                                                                                                                                                                                                                                             |                     |
|      | Mobile App |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                     |
| 17   |            | The Citizen/City App shall integrate citizen and pilgrim service requests and provide location-based, real-time notifications related to city services, major public events and gatherings including Kumbh, traffic and route diversions, bathing-day schedules, safety advisories, and other critical alerts based on the ward, sector, or selected user location.                                                                                                                                                                                          |                     |
| 18   |            | <p>Key Features of the app should include:</p> <ul style="list-style-type: none"> <li>• Incident Reporting(including lost person, crowd congestion, medical emergency, sanitation, water, electricity, safety)</li> <li>• Complaints Tracking</li> <li>• e-Governance Services</li> <li>• Bills Payment</li> <li>• News</li> <li>• Events-spiritual/Kumbh event information</li> <li>• Notifications &amp; crowd/traffic advisories</li> <li>• All Announcements</li> <li>• • Emergency &amp; one-tap SOS to nearest police/medical camp with GPS</li> </ul> |                     |
| 19   |            | Citizen app shall allow pilgrims to report incidents across various grievances such as lost person/missing companion, crowd congestion, medical emergency, sanitation or toilet issues, drinking water shortage, waste accumulation, electricity outage, fire incident, stampede risk, suspicious activity, traffic or route blockage, accommodation/camp issues, and other safety-related concerns, integrated with ICCC for automated emergency response and field dispatch.                                                                               |                     |
| 20   |            | City App should allow to make SOS calls from Click to call feature.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                     |

| SNo. | Parameter  | Specifications                                                                                                                                                                                                               | Compliance (Yes/No) |
|------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 21   |            | City App should allow citizens to pay utility bills and taxes                                                                                                                                                                |                     |
|      | Web Portal |                                                                                                                                                                                                                              |                     |
| 22   |            | It should provide a single view to the citizen and visiting pilgrims for engaging with the city departments.                                                                                                                 |                     |
| 23   |            | It should provide live update of the City Service and Kumbh operational advisories also act as a foundation for Citizen to register the identity and download the Citizen App.                                               |                     |
| 24   |            | Portal should allow citizen to use different City services by selecting services categories                                                                                                                                  |                     |
| 25   |            | The Web portal should provide the citizen the facility to report Civic grievances by selecting grievance categories and subcategories by attaching Image or Video and geo-tagging to support the Grievance request           |                     |
|      |            | The citizen can view the history and status of all the complaints that have been requested.                                                                                                                                  |                     |
| 26   |            | The Citizen should be able to see the GIS view of the city and can find POIs such as ghats, temples, camps, toilets, medical centers, police, parking, transport routes, nearby attractions and help desks as when required. |                     |
| 27   |            | The web portal should have Content Management System to create content and publish content and it will integrate with all public Channels for News and other feeds                                                           |                     |
| 28   |            | The web portal should have CMS that shall provide a role- based user access mechanism where an administrator can create and manage users, user groups, roles, and role permissions.                                          |                     |
| 29   |            | The CMS should support login module using which content authors will be able to login.                                                                                                                                       |                     |
| 30   |            | Login module should have forgot password mechanism. In case user forgets the password/wish to reset a link should be sent to user's registered Email address from where password can be reset.                               |                     |
| 31   |            | CMS should support integration with Directory Services (supporting LDAP) to manage users and their preferences. CMS should also support latest security certificates like SSL 3.0                                            |                     |

| SNo. | Parameter | Specifications                                                                                                                                                                                                                                                                                                                                                                           | Compliance (Yes/No) |
|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 32   |           | CMS should be able to publish content to any external portal apart from its native portal by Integrating with the required platform.                                                                                                                                                                                                                                                     |                     |
| 33   |           | CMS shall support the creation, modification, and deletion of templates to enable easy management of site and page layout and navigation                                                                                                                                                                                                                                                 |                     |
| 34   |           | a) Preview only on CMS (not visible to users)<br>b) Save as unpublished (draft)<br>c) Preview on Portal<br>d) Send for approval<br>e) Approve<br>f) Publish after approval (i.e., after successful completion of the approval workflow)<br>g) Unpublish (save as unpublished, not visible to users)<br>h) Publication scheduling<br>i) Publication expiration date (automatic unpublish) |                     |
| 35   |           | CMS shall contain a content approval workflow to enable the approval of modifications (create, modify, delete) before publication (i.e., before becoming visible to the public)                                                                                                                                                                                                          |                     |
| 36   |           | CMS shall support Administrator (or a designated user with an appropriate permission level) to assign and reassign users to workflow tasks (i.e., define the targets within the workflow)                                                                                                                                                                                                |                     |
| 37   |           | CMS shall support the creation and application of styles using Cascading Style Sheets (CSS) enabling the swift alteration of the look and feel (colour, font, image size and positioning, link attributes, table properties). Graphics should be avoided altogether regarding navigation (e.g., no navigation buttons -                                                                  |                     |
| 38   |           | these should be text, which gets its look and feel through CSS).                                                                                                                                                                                                                                                                                                                         |                     |
| 39   |           | The CMS should have the capability to create and deploy content on different portals with same or different branding through integrating with the other portals                                                                                                                                                                                                                          |                     |
| 40   |           | The CMS shall support multilingual (English & Hindi) capabilities.                                                                                                                                                                                                                                                                                                                       |                     |





# Ujjain Smart City Limited



Request for Proposal for  
Selection of System Integrator (SI) for  
Establishment and O&M of Integrated Command & Control Centre (ICCC) for  
Simhastha Kumbh Mela 2028

## Volume – 3: DRAFT CONTRACT AGREEMENT & SERVICE LEVEL AGREEMENT (SLA)

NIT No. USCL/430

Tender ID: 2026\_UAD\_508730\_1 Ujjain Date: 20/05/2026

.....

**Ujjain Smart City Limited**  
**Simhastha Mela Office, Kothi Road,**  
**Ujjain, Madhya Pradesh – 456010**

## **Establishment and O&M of Integrated Command & Control Centre (ICCC) for Simhashta Kumbh Mela 2028**

### **VOLUMES STRUCTURE OF RFP DOCUMENTS**

| <b>Volume</b> | <b>Contents</b>                                    |
|---------------|----------------------------------------------------|
| Volume-I      | Instructions to Bidders and Bid Process Management |
| Volume-II     | Scope of Work & Technical Specifications           |
| Volume-III    | Draft Contract Agreement & SLA                     |
| Volume-IV     | Financial Bid / BOQ                                |

## **Volume – 3: DRAFT CONTRACT AGREEMENT (DCA) & SERVICE LEVEL AGREEMENT (SLA)**

### **TABLE OF CONTENTS**

| <b>Section</b> | <b>Description</b>                   |
|----------------|--------------------------------------|
| Preamble       | Contract Introduction                |
| Part A         | General Conditions of Contract (GCC) |
| Part B         | Special Conditions of Contract (SCC) |
| Part C         | Service Levels & SLA Framework       |
| Part D         | Schedules & Annexures                |

## PREAMBLE

This Master Service Agreement ("Agreement") is executed on this \_\_\_\_ day of \_\_\_\_\_ 2026 at Ujjain, Madhya Pradesh.

## BETWEEN

Ujjain Smart City Limited (USCL), a company incorporated under the Companies Act and acting through its Chief Executive Officer, having its office at Simhastha Mela Office, Kothi Road, Ujjain, Madhya Pradesh – 456010 (hereinafter referred to as the “Authority” or “USCL”, which expression shall, unless repugnant to the context or meaning thereof, include its successors, administrators and permitted assigns);

## AND

M/s \_\_\_\_\_, a company incorporated under the provisions of the Companies Act and having its registered office at \_\_\_\_\_ (hereinafter referred to as the “System Integrator” or “SI”, which expression shall unless repugnant to the context or meaning thereof include its successors, administrators, legal representatives and permitted assigns).

The Authority and SI are individually referred to as a “Party” and collectively as the “Parties”.

WHEREAS, the Authority intends to establish a highly scalable, secure, resilient, AI-enabled and integrated enterprise-grade Integrated Command & Control Centre (ICCC) ecosystem for Simhastha Kumbh Mela 2028 for enabling unified surveillance, crowd management, emergency response coordination, integrated public safety operations, traffic and mobility management, decision intelligence, GIS and Digital Twin enabled situational awareness, disaster response management, cyber monitoring and real-time governance.

WHEREAS, the Project is of strategic national and public importance involving management of extremely large pilgrim footfall, public order, disaster management, emergency response, traffic management, public health coordination, and critical urban and event infrastructure.

WHEREAS, the Authority has selected the SI through a competitive bidding process for undertaking design, engineering, supply, installation, integration, testing, commissioning, operations and maintenance of permanent and temporary/rental ICCC infrastructure under a hybrid deployment model.

NOW THEREFORE, in consideration of mutual covenants and obligations contained herein, the Parties hereby agree as follows:

| Section | Description                          |
|---------|--------------------------------------|
| Part A  | General Conditions of Contract (GCC) |
| Part B  | Special Conditions of Contract (SCC) |
| Part C  | Service Levels & SLA Framework       |
| Part D  | Schedules & Annexures                |

## **PART A – GENERAL CONDITIONS OF CONTRACT (GCC)**

### **1. DEFINITIONS AND INTERPRETATION**

Unless the context otherwise requires, the following terms shall have the meanings assigned below:

#### **1.1 Definitions**

##### **“Acceptance Test”**

Means Factory Acceptance Test (FAT), Site Acceptance Test (SAT), User Acceptance Test (UAT), integration testing, failover testing, cybersecurity testing, stress testing, load testing, mock drills, evacuation simulation, crowd surge simulation, redundancy validation, interoperability validation and all other tests required under the Contract.

##### **“AI Analytics Engine”**

Means the AI/ML-based software platform deployed under the Project for people counting, crowd density estimation, crowd surge prediction, abnormal behavior detection, object detection, intrusion detection, queue analytics, traffic analytics, ANPR analytics, heatmaps, predictive intelligence, event detection, alert generation and operational decision support.

##### **“Appointed Date”**

Means the date communicated by the Authority to the SI for commencement of obligations under the Contract.

##### **“Authority”**

Means Ujjain Smart City Limited (USCL) and includes Simhashta Mela Authority and any agency authorized by USCL.

##### **“Business Continuity Plan (BCP)”**

Means the comprehensive continuity framework prepared by the SI covering uninterrupted operations during infrastructure failure, cyber incidents, crowd emergencies, natural disasters, connectivity disruptions, utility failures or any event affecting ICCC operations.

##### **“Critical Event Day”**

Means major snan days, royal procession days, peak crowd days, emergency periods or any day declared critical by the Authority.

##### **“Cyber Incident”**

Means any ransomware attack, malware attack, phishing incident, unauthorized access, credential compromise, data breach, denial-of-service attack, cyber intrusion, malicious activity or cybersecurity compromise.

##### **“Digital Twin Platform”**

Means the integrated GIS-enabled 2D/3D visualization and simulation platform comprising live telemetry integration, AI analytics integration, predictive simulation, traffic simulation, crowd flow simulation, infrastructure visualization, incident intelligence and operational decision support.

##### **“Disaster Recovery (DR)”**

Means the alternate recovery infrastructure, systems, applications, databases, storage, communication links and operational processes enabling restoration of ICCC operations within prescribed Recovery Time Objective (RTO) and Recovery Point Objective (RPO).

**“Event Readiness Certificate”**

Means the certificate issued by the Authority after successful completion of all testing, mock drills, simulations, failover validations and operational readiness verification.

**“Force Majeure”**

Means an event beyond the reasonable control of the affected Party and includes natural disasters, war, riots, epidemic, acts of Government and large-scale civil disturbances.

**“Go-Live”**

Means commencement of successful live operations of the respective Project component after acceptance by the Authority.

**“ICCC”**

Means the Integrated Command and Control Centre established under the Project.

**“Major Snan Day”**

Means designated peak bathing dates notified by the Authority.

**“O&M”**

Means operations, maintenance, support, monitoring, incident management, preventive maintenance, corrective maintenance and lifecycle support.

**“Peak Load Condition”**

Means operational conditions where crowd density, video streams, analytics load, network utilization or incident volume exceeds thresholds prescribed by the Authority.

**“Permanent Infrastructure”**

Means all CAPEX-based infrastructure procured and permanently installed under the Project.

**“Rental Infrastructure”**

Means temporary/event-based infrastructure deployed on rental basis for Simhashta operations.

**“Service Levels” or “SLA”**

Means measurable service obligations specified under this Agreement.

**“Viewing Centre”**

Means decentralized monitoring facility integrated with ICCC for surveillance and operational management.

**“War Room”**

Means dedicated operational emergency coordination facility activated during critical event periods.

**“Works”**

Means all activities required for survey, design, supply, installation, integration, testing, commissioning, operations and maintenance of the ICCC ecosystem.

## **1.2 Interpretation**

1. In case of inconsistency, the following order of precedence shall apply:
  - a. Corrigenda/Addenda;
  - b. Contract Agreement;
  - c. Volume III;
  - d. Volume II;
  - e. Volume I;
  - f. Approved Clarifications;
  - g. Bid Submission.
2. Words importing singular shall include plural and vice versa.
3. Headings are for convenience only.
4. Interpretation favoring operational continuity, public safety, cybersecurity and uninterrupted ICCC functioning shall prevail.
5. References to laws shall include amendments, re-enactments and statutory modifications.

## **2. SCOPE OF WORK**

### **2.1 General Scope**

The SI shall undertake complete end-to-end design, engineering, procurement, supply, installation, integration, testing, commissioning, operations and maintenance of the ICCC ecosystem for Simhastha Kumbh Mela 2028.

### **2.2 Hybrid Deployment Model**

The Project shall comprise:

#### **A. Permanent Infrastructure**

- CAPEX-based deployment;
- Permanent ICCC systems;
- Data Centre infrastructure;
- OFC backbone;
- enterprise software platforms;
- cybersecurity infrastructure;
- permanent surveillance systems;
- 60 months comprehensive warranty and O&M.

#### **B. Temporary / Rental Infrastructure**

- Event-specific surveillance systems;

- temporary command centres;
- temporary viewing centres;
- portable field systems;
- temporary communication systems;
- temporary analytics and crowd management systems;
- approximately 9 months deployment and support.

### **2.3 Broad Components**

The Project may include, but shall not be limited to:

- Fixed cameras;
- PTZ cameras;
- Thermal cameras;
- Panoramic cameras;
- Body worn cameras;
- Dash cameras;
- Drone integration;
- Water surveillance systems;
- Video Management System (VMS);
- AI analytics platform;
- Digital Twin platform;
- GIS integration;
- Incident management system;
- ICCC infrastructure;
- Viewing centres;
- War-room infrastructure;
- OFC network;
- Wi-Fi and communication systems;
- Cybersecurity systems;
- SOC/SIEM integration;
- DC/DR infrastructure;
- Public announcement integration;
- Emergency response integration.

### **2.4 Detailed Services**



The SI shall provide:

- Detailed survey and site assessment;
- Detailed engineering and architecture design;
- Procurement and supply;
- Installation and commissioning;
- Integration with existing and third-party systems;
- Cybersecurity implementation;
- Cloud operations where applicable;
- AI tuning and analytics optimization;
- Asset tagging and inventory management;
- Training and capacity building;
- Operational staffing;
- Preventive and corrective maintenance;
- Incident response and escalation management;
- Disaster recovery management;
- Event readiness management.

## **2.5 Multi-Agency Integration**

The SI shall integrate systems with:

- Police Department;
- Mela Authority;
- Existing Smart City ICCC;
- Fire Services;
- Health Department;
- Transport Department;
- Disaster Management Authorities;
- Emergency Response Agencies;
- Municipal Authorities.

## **2.6 Scalability**

The architecture shall support future expansion without major redesign including:

- Additional cameras;
- Additional viewing centres;
- Additional analytics modules;

- Future event integration;
- IoT devices;
- Additional GIS layers;
- Cloud expansion.

### **3. CONDITIONS PRECEDENT**

The SI shall fulfil the following conditions prior to Appointed Date:

- Submission of Performance Bank Guarantee;
- Submission of OEM authorizations;
- Submission of detailed project plan;
- Submission of manpower deployment plan;
- Submission of cybersecurity architecture;
- Submission of DR and BCP plans;
- Submission of incident response plan;
- Submission of escalation matrix;
- Submission of insurance policies;
- Submission of statutory approvals;
- Submission of spare inventory plan;
- Submission of peak snan operational plan.

Failure to comply may constitute material breach.

### **4. COMMENCEMENT AND PROGRESS**

The SI shall commence work immediately upon issuance of Letter of Acceptance or Appointed Date.

The SI shall:

- Mobilize adequate manpower and equipment;
- Deploy multiple implementation teams where required;
- Work in multiple shifts including night shifts if required;
- Ensure milestone achievement within timelines;
- Deploy additional resources without additional cost where delays are attributable to SI.

The Authority may direct acceleration of work in public interest.

### **5. STANDARDS OF PERFORMANCE**

The SI shall perform the services with due diligence, efficiency and in accordance with Good Industry Practices.

Mandatory compliance standards shall include:

| <b>Standard</b>          | <b>Applicability</b>    |
|--------------------------|-------------------------|
| ISO 27001                | Information Security    |
| ISO 22301                | Business Continuity     |
| CERT-In Guidelines       | Cybersecurity           |
| ONVIF                    | Interoperability        |
| MeitY Cloud Guidelines   | Cloud Infrastructure    |
| STQC                     | Applicable systems      |
| NCIIPC Guidelines        | Critical Infrastructure |
| Applicable BIS Standards | Hardware systems        |

The SI shall ensure:

- Enterprise-grade resiliency;
- High availability architecture;
- No single point of failure;
- Cybersecurity hardening;
- Audit readiness;
- Event readiness.

## **6. APPROVALS AND CONSENTS**

The SI shall obtain all applicable approvals including:

- Road cutting permissions;
- OFC permissions;
- Drone/UAV permissions;
- RF spectrum permissions;
- Telecom permissions;
- Municipal permissions;
- Electrical approvals;
- Equipment certifications;
- Cloud compliance approvals.

The Authority shall facilitate coordination support.

## **7. OBLIGATIONS OF SYSTEM INTEGRATOR**

### **7.1 General Obligations**

The SI shall:

- Ensure complete system integration;
- Ensure interoperability across platforms;

- Provide scalable architecture;
- Maintain operational readiness;
- Ensure uninterrupted services.

## **7.2 Total System Responsibility**

The SI shall remain solely responsible for:

- System functionality;
- Interoperability;
- Uptime;
- Cybersecurity;
- OEM coordination;
- SLA compliance;
- Third-party integration.

Subcontracting shall not dilute SI responsibilities.

## **7.3 Manpower Obligations**

The System Integrator (SI) shall deploy qualified, experienced, competent, and adequately trained personnel for implementation, integration, operations, maintenance, cybersecurity management, AI analytics operations, Digital Twin operations, network management, ICCC operations, and field support services under the Project.

The personnel deployed by the SI shall possess minimum educational qualifications, certifications, and relevant experience as specified in the RFP Volume 2 and approved by the Authority.

The SI shall ensure continuity of key personnel during critical implementation stages, trial runs, major snan days, and high-footfall operational periods.

The Authority reserves the right to seek replacement of any personnel found unsuitable, underperforming, lacking required qualifications, involved in misconduct, or detrimental to Project operations.

The SI shall replace such personnel within timelines specified by the Authority without any additional cost implication to the Authority. All personnel shall undergo police verification where required.

Deployment of minimum manpower shall not limit the SI's responsibility to deploy additional manpower necessary for successful, uninterrupted, and SLA-compliant operations of the ICCC ecosystem.

## **7.4 Event Readiness Obligations**

The SI shall:

- Conduct mock drills;
- Conduct crowd simulations;
- Conduct evacuation simulations;

- Conduct failover testing;
- Maintain standby equipment;
- Maintain emergency response teams;
- Deploy enhanced staffing during peak periods.

## **7.5 Major Snan Day Obligations**

During Major Snan Days, the SI shall ensure:

- 24x7 operations;
- Dedicated war-room operations;
- Zero planned downtime;
- Mobile maintenance teams;
- Emergency escalation support;
- OEM onsite support;
- Standby power and communication systems.

## **7.6 Operational Continuity**

The SI shall ensure:

- Redundant connectivity;
- Redundant storage;
- DR readiness;
- Alternate routing;
- Backup power;
- Failover capability.

## **8. OBLIGATIONS OF AUTHORITY**

The Authority shall:

- Facilitate interdepartmental coordination;
- Provide access permissions;
- Facilitate site access;
- Review deliverables;
- Release payments subject to compliance;
- Facilitate statutory coordination where feasible.
- Subject to Contract provisions, the Authority shall reimburse eligible recurring electricity consumption charges for approved project infrastructure as per certified actuals.

## **9. PROJECT GOVERNANCE**

### **9.1 Governance Structure**

The Authority may constitute:

- Apex Committee;
- Steering Committee;
- Technical Committee;
- Operations Committee;
- Cybersecurity Committee;
- Crisis Management Committee.

## **9.2 Project Management Office**

The SI shall establish a dedicated Project Management Office (PMO) at Ujjain.

## **9.3 Review Meetings**

Mandatory review meetings shall include:

- Daily readiness reviews;
- Weekly project reviews;
- Monthly governance reviews;
- Cybersecurity reviews;
- Critical event reviews.

## **10. PROJECT PLAN AND REPORTING**

The SI shall submit:

- Master Project Plan;
- Deployment Schedule;
- Risk Register;
- Resource Deployment Plan;
- Escalation Matrix;
- Testing Plan;
- Recovery Plan;
- Cybersecurity Compliance Reports.

Indicative reporting obligations:

| <b>Report</b>          | <b>Frequency</b> |
|------------------------|------------------|
| Daily Readiness Report | Daily            |
| Incident Report        | Real-Time        |
| Cybersecurity Report   | Weekly           |
| Asset Health Report    | Weekly           |

|                        |                            |
|------------------------|----------------------------|
| AI Accuracy Report     | Weekly                     |
| Failover Status Report | Monthly                    |
| Crowd Analytics Report | Hourly during peak periods |

## 11. IMPLEMENTATION SCHEDULE

Implementation timelines shall be as specified in Volume-II.

The Authority may:

- Direct phased deployment;
- Direct partial operationalization;
- Revise deployment priorities;
- Accelerate implementation in public interest.

Delays attributable to SI shall attract:

- Liquidated Damages;
- SLA deductions;
- Risk-based recoveries.

## 12. TESTING, COMMISSIONING AND ACCEPTANCE

### 12.1 Testing Requirements

The SI shall conduct:

- FAT;
- SAT;
- UAT;
- Integration testing;
- Failover testing;
- Cybersecurity testing;
- VAPT;
- Stress testing;
- Peak load testing;
- Mock drills;
- Evacuation simulation;
- Crowd surge simulation;
- DR drills.

### 12.2 Mandatory Simulations

|            |           |
|------------|-----------|
| Simulation | Mandatory |
|------------|-----------|

|                 |     |
|-----------------|-----|
| Crowd Surge     | Yes |
| Evacuation      | Yes |
| Network Outage  | Yes |
| Cyber Attack    | Yes |
| ICCC Failover   | Yes |
| Camera Overload | Yes |
| AI Overload     | Yes |

### 12.3 Go-Live

No component shall be declared Go-Live without written approval of the Authority.

### 12.4 Event Readiness Certification

Event Readiness Certificate shall be mandatory before commencement of live event operations.

## 13. PAYMENT TERMS

### 13.1 Payment Categories

Payments shall comprise:

- CAPEX payments;
- Rental infrastructure deployment payments;
- O&M payments;
- SLA-linked payments;
- Training payments;
- Integration milestone payments.

### 13.2 CAPEX Payment Structure

| SNo. | Milestone                                                                                                                                       | Payment (%) |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| 1    | Submission & Approval of Detailed Project Plan, Detailed Engineering Design, Architecture, Implementation Plan, Cybersecurity Plan, DR/BCP Plan | 5%          |
| 2    | Supply / Delivery of Hardware, Software, Licenses & Major Equipment at Approved Sites / Stores                                                  | 25%         |
| 3    | Installation of Field Infrastructure, ICCC Infrastructure, OFC Network, Cameras, DC/DR, Cybersecurity Systems etc.                              | 20%         |
| 4    | Integration of all Subsystems including VMS, AI Analytics, Digital Twin, GIS, Third-Party Integrations, Communication Systems etc.              | 15%         |
| 5    | Successful Completion of FAT, SAT, UAT, Cybersecurity Testing, VAPT, Failover Testing, Simulation Testing & Trial Runs                          | 10%         |
| 6    | Go-Live of ICCC Ecosystem and Issuance of Event Readiness Certificate                                                                           | 10%         |



|       |                                                                                                                            |      |
|-------|----------------------------------------------------------------------------------------------------------------------------|------|
| 7     | Successful Completion of Simhashta Major Operations / Major Snan Period without Critical SLA Breach                        | 10%  |
| 8     | Final Acceptance & Submission of As-Built Drawings, Documentation, Asset Register, Knowledge Transfer & Closure Compliance | 5%   |
| Total |                                                                                                                            | 100% |

### 13.3 Rental Infrastructure Payments

| SNo.  | Milestone                                                    | Payment (%) |
|-------|--------------------------------------------------------------|-------------|
| 1     | Mobilization & Deployment of Temporary/Rental Infrastructure | 25%         |
| 2     | Successful Installation & Integration Certification          | 25%         |
| 3     | Event Operational Readiness & Trial Run Certification        | 20%         |
| 4     | Successful Simhashta Operations including Major Snan Days    | 20%         |
| 5     | Decommissioning, Site Restoration & Final Clearance          | 10%         |
| Total |                                                              | 100%        |

### 13.4 O&M Payments

O&M payments shall be released quarterly or monthly subject to SLA compliance.

#### 13.4.1 Permanent Infrastructure O&M (60 Months)

| Component                           | Suggested Payment Mode |
|-------------------------------------|------------------------|
| Preventive & Corrective Maintenance | Quarterly              |
| Helpdesk & Manpower                 | Monthly                |
| Cybersecurity Monitoring            | Quarterly              |
| Software Support & Upgrades         | Quarterly              |
| Spare Support                       | Quarterly              |

#### 13.4.2 Temporary Infrastructure O&M (9 Months)

| Component                 | Suggested Payment Mode |
|---------------------------|------------------------|
| Field Operations Support  | Monthly                |
| Temporary Network Support | Monthly                |
| Temporary ICCC Operations | Monthly                |
| Event Staffing            | Monthly                |
| SLA-linked Retention      | 15% holdback           |

#### 13.4.3 Electricity Charges & Utility Reimbursement

The System Integrator (SI) shall be responsible for obtaining, coordinating, maintaining, and operating all temporary and permanent electricity connections required for implementation, commissioning, operations, and maintenance of the Project infrastructure, including but not limited

to ICCC facilities, war rooms, viewing centres, field devices, surveillance systems, communication systems, network infrastructure, poles, switches, and associated project components.

The SI shall initially pay all electricity-related charges including electricity consumption charges, meter charges, temporary connection charges, demand charges, utility service charges, and other recurring electricity operational expenses to the concerned electricity distribution utility/agencies to ensure uninterrupted operations of the ICCC ecosystem.

The Authority shall reimburse actual recurring electricity consumption charges on a monthly basis subject to:

- submission of original bills/invoices/receipts,
- submission of proof of payment,
- certification by the Authority's Authorized Representative,
- verification of actual deployment and operational status,
- and compliance with Contract and SLA obligations.

No reimbursement shall be admissible for penalties, delayed payment charges, interest liabilities, avoidable disconnection charges, unauthorized consumption, or inefficiencies attributable to the SI.

The SI shall ensure uninterrupted utility availability throughout the Contract Period and no operational disruption due to non-payment of utility charges shall be permissible.

### **13.5 Retention and Holdback**

The Authority shall retain:

- Retention money;
- SLA-linked deductions;
- Penalties;
- Event-linked holdback amounts.

#### **13.5.1 Minimum Retention**

Minimum 15% of eligible payments shall be retained and linked with SLA compliance, Event Readiness Certification, and successful completion of Major Snan Day operations.

#### **13.5.2 Event Protection Retention**

Authority may withhold event-linked milestone payments in case of unresolved critical deficiencies, operational instability, cybersecurity non-compliance, or repeated SLA breaches during peak operational periods

## **14. PERFORMANCE SECURITY**

The SI shall furnish an irrevocable Performance Bank Guarantee valid throughout implementation, warranty, O&M and extended support periods.

The Authority may invoke the PBG in case of:

- Material breach;
- SLA failure;

- Abandonment;
- Non-performance;
- Cybersecurity negligence;
- Failure during critical event operations.

## **15. INTELLECTUAL PROPERTY RIGHTS**

All Project-specific deliverables including:

- Dashboards;
  - Reports;
  - Configurations;
  - Metadata;
  - GIS layers;
  - Digital Twin models;
  - AI datasets;
  - Incident databases;
  - Custom developments;
  - SOPs;
  - Network diagrams;
  - Operational workflows;
- shall vest with the Authority.

The Authority shall have perpetual, irrevocable and royalty-free usage rights.

## **16. INFORMATION SECURITY AND CYBERSECURITY**

The SI shall establish comprehensive cybersecurity controls including:

- Security hardening;
- MFA;
- RBAC;
- Encryption;
- SIEM integration;
- SOC integration;
- Endpoint security;
- Patch management;
- VAPT;
- Log monitoring;
- Incident response mechanisms;

- Ransomware protection;
- Backup protection;
- Network segmentation.

The SI shall comply with:

- CERT-In guidelines;
- MeitY guidelines;
- NCIIPC advisories;
- Applicable Government cybersecurity requirements.

#### **16.1 Incident Response Timelines**

| <b>Activity</b> | <b>Timeline</b> |
|-----------------|-----------------|
| Detection       | 15 Minutes      |
| Reporting       | 30 Minutes      |
| Containment     | 1 Hour          |
| Recovery        | 4 Hours         |

#### **16.2 Security Audit**

The Authority may conduct:

- Cybersecurity audits;
- Penetration testing;
- Forensic audits;
- Configuration audits;
- Source configuration verification.

### **17. CONFIDENTIALITY AND DATA PROTECTION**

The SI shall:

- Maintain confidentiality of all operational data;
- Prevent unauthorized disclosure;
- Protect credentials and privileged access;
- Ensure data localization where mandated;
- Prevent unauthorized external hosting;
- Prevent data monetization or unauthorized analytics usage.

Confidentiality obligations shall survive termination.

### **18. AUDIT, ACCESS AND INSPECTION**

The Authority or its authorized agencies may:

- Inspect sites;
- Inspect inventories;
- Audit systems;
- Review cybersecurity posture;
- Conduct surprise inspections;
- Verify manpower deployment;
- Conduct operational readiness reviews.

The SI shall provide unrestricted access during emergencies.

## **19. WARRANTY AND MAINTENANCE**

### **19.1 Permanent Infrastructure**

Comprehensive warranty and O&M shall be provided for 60 months.

### **19.2 Rental Infrastructure**

Comprehensive support shall be provided during the deployment period.

### **19.3 Preventive Maintenance**

The SI shall:

- Conduct scheduled preventive maintenance;
- Maintain spare inventory;
- Maintain critical spare availability during peak periods;
- Ensure MTTR compliance.

## **20. INSURANCE**

The SI shall maintain:

- Third-party liability insurance;
- Transit insurance;
- Equipment insurance;
- Workmen compensation insurance;
- Cyber-risk insurance;
- Professional liability insurance.

Insurance policies shall remain valid throughout the Contract Period.

## **21. INDEMNITY AND LIMITATION OF LIABILITY**

The SI shall indemnify the Authority against:

- Crowd disaster arising from system failure;
- Cybersecurity breaches;

- AI malfunction;
- Drone incidents;
- Operational negligence;
- Third-party claims;
- IPR infringement claims.

Limitation of liability shall not apply in case of:

- Fraud;
- Wilful misconduct;
- Cybersecurity negligence;
- Confidentiality breach;
- Data breach;
- IPR violations.

## **22. FORCE MAJEURE**

Force Majeure shall include:

- Natural disasters;
- War;
- Civil disturbances;
- Epidemic;
- Government restrictions.

Cyber incidents shall not automatically qualify as Force Majeure unless proven beyond reasonable control of the SI.

## **23. EVENTS OF DEFAULT**

Events of default shall include:

- Failure to achieve milestones;
- Repeated SLA failures;
- Project abandonment;
- Cybersecurity breaches;
- Fraud;
- Insolvency;
- Failure during major snan operations;
- Data tampering;
- Fake analytics generation;
- Non-availability of critical manpower;

- Failure in DR/failover testing.

## **24. TERMINATION**

### **24.1 Termination for Default**

The Authority may terminate the Contract in case of:

- Material breach;
- Persistent non-performance;
- Failure to achieve readiness;
- Cybersecurity negligence;
- Repeated critical outages.

### **24.2 Emergency Takeover Rights**

During emergencies or public safety situations, the Authority may:

- Take temporary operational control;
- Access systems directly;
- Engage third-party operators;
- Use licenses and configurations;
- Utilize all operational resources.

## **25. EXIT MANAGEMENT**

The SI shall ensure seamless transition including handover of Configurations; Passwords; Network diagrams; Source documents; AI models; Digital Twin datasets; GIS layers; VM images; Logs; Licenses; SOPs; and Asset registers.

The SI shall ensure uninterrupted services during transition.

## **26. DISPUTE RESOLUTION**

Any dispute shall be resolved as follows:

Step 1: Amicable resolution within 15 days

Step 2: Escalation to senior committee within 15 days

Step 3: Arbitration under Arbitration & Conciliation Act, 1996

The language shall be English.

### **26.1 Amicable Settlement**

Disputes shall initially be resolved through committee-level discussions.

### **26.2 Arbitration**

Disputes unresolved within 30 days shall be referred to arbitration under Arbitration and Conciliation Act, 1996.

Seat of Arbitration: Ujjain/Bhopal, Madhya Pradesh.

### **26.3 Jurisdiction**

Courts at Ujjain, Madhya Pradesh shall have exclusive jurisdiction.



## **PART B – SPECIAL CONDITIONS OF CONTRACT (SCC)**

### **27. LIQUIDATED DAMAGES**

Liquidated Damages may be imposed for:

- Delay in implementation;
- Delay in Go-Live;
- ICCC outage;
- AI analytics outage;
- OFC outage;
- Camera downtime;
- Failure during major snan days;
- Failure in DR readiness.

Indicative structure:

| <b>Failure</b>       | <b>LD</b>      |
|----------------------|----------------|
| Delay in Go-Live     | Per Day Basis  |
| ICCC Outage          | Per Hour Basis |
| AI Analytics Failure | Escalating LD  |
| OFC Failure          | Escalating LD  |
| Major Snan Failure   | Severe LD      |

Maximum cumulative LD may extend up to 10% of Contract Value.

### **28. CHANGE CONTROL NOTE (CCN)**

The Authority may:

- Increase or decrease quantities;
- Revise locations;
- Add integrations;
- Modify deployment strategy;
- Introduce additional event requirements.

All changes shall be documented through approved Change Control Notes.

### **29. RISK MANAGEMENT AND BUSINESS CONTINUITY**

The SI shall establish comprehensive risk and continuity mechanisms including:

- Alternate ICCC;
- DR site;
- Redundant communication links;
- Alternate routing;

- Backup internet connectivity;
- Backup power systems;
- Emergency operation protocols;
- DR drills;
- Cyber recovery procedures.

The SI shall periodically conduct:

- Failover testing;
- Recovery drills;
- Operational continuity validation.

### **30. OEM RESPONSIBILITY**

The SI shall ensure:

- Valid OEM support contracts;
- No end-of-support products;
- OEM-backed warranty;
- OEM onsite support during critical periods;
- L2/L3 escalation support;
- Lifecycle support availability.

### **31. MANPOWER AND DEPLOYMENT CONTROL**

The Authority may require replacement of:

- Non-performing personnel;
- Personnel involved in misconduct;
- Personnel lacking required competency.

The SI shall ensure:

- Shift rosters;
- Biometric attendance;
- Minimum staffing levels;
- Emergency reserve manpower;
- Police verification.

## **PART C – SERVICE LEVEL AGREEMENT (SLA)**

### **32. SERVICE LEVEL FRAMEWORK**

SLAs shall apply to:

- ICCC operations;
- VMS platform;
- AI analytics;
- Digital Twin platform;
- Communication network;
- Cybersecurity systems;
- DR operations;
- Helpdesk services;
- Field infrastructure;
- Viewing centres;
- Crowd alert systems.

### **33. AVAILABILITY SLA**

| <b>Component</b>           | <b>Minimum Availability</b> |
|----------------------------|-----------------------------|
| ICCC Core Platform         | 99.5%                       |
| VMS Platform               | 99.5%                       |
| AI Analytics Platform      | 99.5%                       |
| Digital Twin Platform      | 99.5%                       |
| OFC Backbone               | 99.0%                       |
| Major Surveillance Cameras | 98.0%                       |

Major Snan Days may require enhanced SLA obligations up to 99.9%.

### **34. INCIDENT CLASSIFICATION**

| <b>Severity</b> | <b>Description</b>                      |
|-----------------|-----------------------------------------|
| Critical        | Complete outage or public safety impact |
| Major           | Significant degradation                 |
| Minor           | Localized impact                        |
| Low             | Non-critical issue                      |

### **35. RESPONSE AND RESOLUTION SLA**

| <b>Severity</b> | <b>Response Time</b> | <b>Resolution Time</b> |
|-----------------|----------------------|------------------------|
| Critical        | 5 Minutes            | 1 Hours                |

|       |                |                 |
|-------|----------------|-----------------|
| Major | 15 Minutes     | 2 Hours         |
| Minor | 2 Hours        | 12 Hours        |
| Low   | 1 Business Day | 3 Business Days |

### 36. PEAK SNAN DAY SLA

During Major Snan Days, the SI shall ensure:

- 99.9% uptime;
- Zero planned downtime;
- Dedicated war-room operations;
- Enhanced manpower deployment;
- Standby equipment;
- Rapid escalation;
- Mobile field response teams;
- Emergency communication channels;
- Continuous OEM support.

Any critical failure during peak operations shall attract severe penalties and may constitute Event of Default.

### 37. SLA PENALTY MATRIX

| Non-Compliance               | Penalty            |
|------------------------------|--------------------|
| ICCC Downtime                | Hourly Deduction   |
| Camera Downtime              | Per Camera Per Day |
| OFC Outage                   | Escalating Penalty |
| AI Analytics Failure         | High Penalty       |
| Cybersecurity Non-Compliance | Critical Penalty   |
| Major Snan Failure           | Severe Penalty     |

Repeated SLA failure may lead to Enhanced penalties; Invocation of PBG; Blacklisting recommendation; Termination.

### 38. HELPDESK AND ESCALATION MANAGEMENT

The SI shall establish Centralized helpdesk; 24x7 support centre; Multilingual support; Ticketing system; Escalation matrix; Incident tracking system; Shift-wise operations.

The helpdesk shall support Incident logging; Escalation tracking; SLA monitoring; Reporting; Emergency escalation.

## **PART D – SCHEDULES AND ANNEXURES**

| <b>Schedule / Annexure</b> | <b>Description</b>          |
|----------------------------|-----------------------------|
| Schedule A                 | Scope of Work               |
| Schedule B                 | Implementation Schedule     |
| Schedule C                 | Payment Schedule            |
| Schedule D                 | SLA Matrix                  |
| Schedule E                 | Manpower Deployment         |
| Schedule F                 | Asset Register              |
| Schedule G                 | Change Control Note         |
| Schedule H                 | Cybersecurity Framework     |
| Schedule I                 | DR and BCP Plan             |
| Schedule J                 | Major Snan Operational Plan |
| Schedule K                 | Asset Handover              |
| Schedule L                 | Escalation Matrix           |
| Schedule M                 | Event Readiness Checklist   |
| Annexure 1                 | Form of Agreement           |
| Annexure 2                 | Non-Disclosure Agreement    |
| Annexure 3                 | Integrity Pact              |
| Annexure 4                 | Governance Framework        |
| Annexure 5                 | Exit Management Plan        |

# Ujjain Smart City Limited



Request for Proposal for  
Selection of System Integrator (SI) for  
Establishment and O&M of Integrated Command & Control Centre (ICCC) for  
Simhastha Kumbh Mela 2028

## Volume – 4: FINANCIAL BID / BILL OF QUANTITIES (BOQ)

NIT No. USCL/430

Tender ID: 2026\_UAD\_508730\_1 Ujjain Date: 20/05/2026

.....

**Ujjain Smart City Limited**  
**Simhastha Mela Office, Kothi Road,**  
**Ujjain, Madhya Pradesh – 456010**

## **Establishment and O&M of Integrated Command & Control Centre (ICCC) for Simhastha Kumbh Mela 2028**

### **VOLUMES STRUCTURE OF RFP DOCUMENTS**

| <b>Volume</b> | <b>Contents</b>                                    |
|---------------|----------------------------------------------------|
| Volume-I      | Instructions to Bidders and Bid Process Management |
| Volume-II     | Scope of Work & Technical Specifications           |
| Volume-III    | Draft Contract Agreement & SLA                     |
| Volume-IV     | Financial Bid / BOQ                                |

## Volume – 2: FINANCIAL BID / BILL OF QUANTITIES (BOQ)

### TABLE OF CONTENTS

| Section    | Description                               |
|------------|-------------------------------------------|
| Section 1  | Instructions for Financial Bid Submission |
| Section 2  | Financial Bid Formats                     |
| Section 3  | Summary Price Schedule                    |
| Section 4  | Permanent Infrastructure (CAPEX) BOQ      |
| Section 5  | Temporary / Rental Infrastructure BOQ     |
| Section 6  | O&M Price Schedule                        |
| Section 7  | Optional / Future Expansion Items         |
| Section 8  | Rate Discovery / Change Request Items     |
| Annexure 1 | Financial Bid Undertaking                 |
| Annexure 2 | Break-up of Taxes & Duties                |
| Annexure 3 | Commercial Deviation Statement            |
| Annexure 4 | Price Reasonability Certificate           |
| Annexure 4 | Price Reasonability Certificate           |



## **SECTION 1: INSTRUCTIONS FOR FINANCIAL BID SUBMISSION**

### **1.1 General**

The Bidder shall submit the Financial Proposal strictly in accordance with the formats prescribed in this Volume.

The Financial Proposal shall:

- be complete in all respects;
- include all costs required for successful implementation and operation of the Project;
- include design, supply, installation, integration, testing, commissioning, training, operations, maintenance, manpower, taxes, logistics, insurance, consumables, spare support, and all incidental costs;
- and remain valid for the period specified in the RFP.

### **1.2 Financial Bid Structure**

The Financial Proposal shall broadly comprise:

#### **A. Permanent Infrastructure (CAPEX)**

Including hardware, software, field infrastructure, ICCC infrastructure, cybersecurity, communication systems, AI analytics, Digital Twin platform, installation & integration, and associated components.

#### **B. Temporary / Rental Infrastructure**

Including temporary/event-specific deployment, rental surveillance systems, temporary communication infrastructure, temporary field infrastructure, temporary manpower support, deployment & dismantling, and associated event operations.

#### **C. O&M Cost**

Including preventive maintenance, corrective maintenance, helpdesk, manpower, software support, cybersecurity support and SLA compliance.

### **1.3 Currency**

All prices shall be quoted in Indian Rupees (INR) only.

### **1.4 Taxes & Duties**

The Bidder shall clearly specify GST, duties, levies, cess, and other applicable taxes.

Any ambiguity in tax structure may render the bid non-responsive.

### **1.5 Inclusive Pricing**

The quoted prices shall be inclusive of transportation; loading/unloading; insurance; installation; commissioning; testing; integration; configuration; documentation; training; manpower; consumables; and all incidental costs.

The Bidder shall be deemed to have examined the complete RFP, specifications, architecture requirements, integration requirements, operational requirements, and site conditions before submission of the Financial Proposal.

The quoted prices shall be inclusive of all items necessary for successful implementation and satisfactory functioning of the Project.

Any component, accessory, software, hardware, license, service, consumable, interface, cabling, mounting arrangement, power arrangement, integration item, manpower, tool, utility, infrastructure element, or incidental item required for successful completion, interoperability, integration, testing, commissioning, operation, performance, reliability, security, redundancy, scalability, and satisfactory functioning of the overall ICCC ecosystem, whether specifically mentioned in the BOQ or not, shall be deemed to be included in the quoted prices elsewhere under appropriate composite items.

No additional payment whatsoever shall be admissible on account of omission, underestimation, misunderstanding, or non-inclusion of any such item in the BOQ by the Bidder.

The SI shall execute the Project on a complete turnkey basis and ensure fully integrated, operational, and SLA-compliant functionality of the entire system without any additional financial implication to the Authority.

#### **1.6 No Conditional Financial Bid**

Conditional financial bids shall be liable for rejection.

#### **1.7 Arithmetic Corrections**

In case of mismatch between unit rate and total amount:

- unit rate shall prevail;
- and total amount shall be corrected accordingly.

#### **1.8 Financial Evaluation**

Financial evaluation shall be carried out as per Quality cum Least Cost Selection (QCLS) methodology specified in Volume-I.

Only the evaluated amount indicated in Summary Price Schedule shall be considered for financial evaluation.

#### **1.9 Abnormally Low / Unbalanced Bid**

Authority reserves the right to seek justification, request breakups, seek additional performance security, or reject abnormally low/unbalanced bids.

## SECTION 2: FINANCIAL BID FORMATS

**FORM FIN-1: FINANCIAL BID COVERING LETTER**

Date: \_\_\_\_\_

To,  
Executive Director,  
Ujjain Smart City Limited,  
Ujjain, Madhya Pradesh.

Subject: Financial Proposal for Selection of System Integrator (SI) for Establishment and O&M of ICCC for Simhastha Kumbh Mela 2028.

Ref: RFP No USCL/ Dated

Sir,

We, the undersigned, submit our Financial Proposal for the above-mentioned Project.

We confirm that:

1. We have examined the RFP documents and understood all terms and conditions.
2. Our Financial Proposal is unconditional.
3. Prices quoted include all obligations required under the Contract.
4. We accept all terms and conditions of the RFP.
5. We understand that Authority is not bound to accept the lowest or any bid.

Authorized Signatory

Name:

Designation:

Bidder Name:

Signature:

Seal:

**FORM FIN-2: SUMMARY PRICE SCHEDULE**

| <b>SNo.</b> | <b>Component</b>                                                | <b>Amount (INR) Excluding GST</b> |
|-------------|-----------------------------------------------------------------|-----------------------------------|
| A           | Permanent Infrastructure (CAPEX)                                |                                   |
| B           | Temporary / Rental Infrastructure                               |                                   |
| C           | O&M for Permanent Infrastructure (60 Months including manpower) |                                   |
| D           | O&M for Temporary Infrastructure (9 Months including manpower)  |                                   |
| <b>E</b>    | <b>Total Evaluated Project Cost (A+B+C+D)</b>                   |                                   |
| <b>F</b>    | Optional/Future Expansion Items (Not considered for evaluation) |                                   |
| G           | GST                                                             |                                   |
| H           | Grand Total Including GST                                       |                                   |
| I           | Permanent Infrastructure (CAPEX)                                |                                   |

**Note:**

- 1. Evaluation shall be carried out considering amount quoted in Item “E”.**
- 2. Optional/Future Expansion Items shall not be considered for bid evaluation.**

### SECTION 3: CAPEX BOQ

#### 3.1 Surveillance & Field Sensing Infrastructure

| SNo. | Item Description                 | Unit | Qty  | Unit Rate (INR) | Amount (INR) |
|------|----------------------------------|------|------|-----------------|--------------|
| 1    | Fixed/Bullet IP Cameras          | Nos  | 1151 |                 |              |
| 2    | PTZ Cameras                      | Nos  | 412  |                 |              |
| 3    | Panoramic Cameras                | Nos  | 18   |                 |              |
| 4    | Thermal Cameras                  | Nos  | 24   |                 |              |
| 5    | ANPR Cameras                     | Nos  | 29   |                 |              |
| 6    | Drones                           | No   | 10   |                 |              |
| 7    | Drone Integration Infrastructure | Lot  | 1    |                 |              |
| 8    | Video Encoders/Edge Devices      | Lot  | 1    |                 |              |

#### 3.2 Enterprise Software Platforms

| SNo | Item Description                                               | Unit | Qty | Unit Rate | Amount |
|-----|----------------------------------------------------------------|------|-----|-----------|--------|
| 1   | Enterprise VMS Platform including licenses & failover          | Lot  | 1   |           |        |
| 2   | AI Video Analytics Platform including crowd & safety analytics | Lot  | 1   |           |        |
| 3   | Digital Twin & Decision Intelligence Platform                  | Lot  | 1   |           |        |
| 4   | GIS & Geospatial Visualization Platform                        | Lot  | 1   |           |        |
| 5   | ICCC Integrated Application Platform                           | Lot  | 1   |           |        |
| 6   | Mobile Application for Pilgrims/Visitors                       | Lot  | 1   |           |        |
| 7   | ITSM / EMS / SLA Management Platform                           | Lot  | 1   |           |        |
| 8   | Dispatcher & Communication Management Platform                 | Lot  | 1   |           |        |

#### 3.3 Communication Network Infrastructure

| SNo. | Item Description            | Unit | Qty  | Unit Rate | Amount |
|------|-----------------------------|------|------|-----------|--------|
| 1    | OFC Backbone Infrastructure | Km   | 1100 |           |        |
| 2    | HDPE Ducting Infrastructure | Km   | 900  |           |        |
| 3    | Field Network Switches      | Nos  | 447  |           |        |

|   |                                                  |     |   |  |  |
|---|--------------------------------------------------|-----|---|--|--|
| 4 | Wireless / RF / Wi-Fi Infrastructure             | Lot | 1 |  |  |
| 5 | Network Monitoring & Management System           | Lot | 1 |  |  |
| 6 | Field Network Cabinets / Junction Infrastructure | Lot | 1 |  |  |
| 7 | Dashboard & Reporting                            | Lot | 1 |  |  |

### 3.4 Data Center / DR / Compute Infrastructure

| SNo. | Item Description                             | Unit | Qty | Unit Rate | Amount |
|------|----------------------------------------------|------|-----|-----------|--------|
| 1    | Data Center Compute Infrastructure           | Lot  | 1   |           |        |
| 2    | GPU Infrastructure for AI Processing         | Lot  | 1   |           |        |
| 3    | SAN/NAS Storage Infrastructure               | Lot  | 1   |           |        |
| 4    | Backup & Archival Infrastructure             | Lot  | 1   |           |        |
| 5    | Disaster Recovery Infrastructure             | Lot  | 1   |           |        |
| 6    | Virtualization & Cloud Management Platform   | Lot  | 1   |           |        |
| 7    | Server Farm & Core Network Infrastructure    | Lot  | 1   |           |        |
| 8    | Rack, Power, UPS & Electrical Infrastructure | Lot  | 1   |           |        |
| 9    | DG Set Infrastructure                        | Lot  | 1   |           |        |

### 3.5 Cybersecurity Infrastructure

| SNo. | Item Description                                 | Unit | Qty | Unit Rate | Amount |
|------|--------------------------------------------------|------|-----|-----------|--------|
| 1    | Next Generation Firewall (NGFW)                  | Lot  | 1   |           |        |
| 2    | IDS/IPS Infrastructure                           | Lot  | 1   |           |        |
| 3    | SIEM Platform                                    | Lot  | 1   |           |        |
| 4    | Endpoint Security / EDR Solution                 | Lot  | 1   |           |        |
| 5    | MDR/XDR Platform                                 | Lot  | 1   |           |        |
| 6    | VAPT & Security Audit Tools/Services             | Lot  | 1   |           |        |
| 7    | Log Management & Cyber Monitoring Infrastructure | Lot  | 1   |           |        |
| 8    | Network Racks                                    | Nos  | 2   |           |        |

### 3.6 ICCC, War Room & Viewing Center Infrastructure

| SNo. | Item Description                                                                                                                           | Unit | Qty | Unit Rate | Amount |
|------|--------------------------------------------------------------------------------------------------------------------------------------------|------|-----|-----------|--------|
| 1    | Integrated ICCC Infrastructure including interiors, video wall, AV systems, consoles, furniture, power systems & associated infrastructure | Lot  | 1   |           |        |
| 2    | Mini War Room at Ranoji ki Chhatra (20-Seater) – Complete Integrated Setup                                                                 | Lot  | 1   |           |        |
| 3    | Fully Integrated Viewing Centers                                                                                                           | Nos  | 10  |           |        |
| 4    | Operator Workstations with required accessories & licenses                                                                                 | Nos  | 50  |           |        |
| 5    | Indoor Surveillance & Access Control for ICCC                                                                                              | Lot  | 1   |           |        |

### 3.7 Field Infrastructure

| SNo | Item Description                        | Unit | Qty | Unit Rate | Amount |
|-----|-----------------------------------------|------|-----|-----------|--------|
| 1   | Camera Poles with mounting accessories  | Nos  | 796 |           |        |
| 2   | Mounting Structures                     | Nos  | 796 |           |        |
| 3   | Outdoor Cabinets / Junction Boxes       | Nos  | 442 |           |        |
| 4   | UPS Systems                             | Nos  | 442 |           |        |
| 5   | Earthing & Lightning Protection         | Lot  | 1   |           |        |
| 6   | Field Power & Electrical Infrastructure | Lot  | 1   |           |        |
| 7   | Public Address System Infrastructure    | Lot  | 1   |           |        |



## SECTION 4: TEMPORARY / RENTAL INFRASTRUCTURE BOQ

### 4.1 Temporary Surveillance Infrastructure

| S.No | Item Description                | Unit | Qty  | Duration | Rate | Amount |
|------|---------------------------------|------|------|----------|------|--------|
| 1    | Temporary Fixed Cameras         | Nos  | 990  | 9 Months |      |        |
| 2    | Temporary PTZ Cameras           | Nos  | 176  | 9 Months |      |        |
| 3    | Temporary Panoramic Cameras     | Nos  | 42   | 9 Months |      |        |
| 4    | Temporary Thermal Cameras       | Nos  | 56   | 9 Months |      |        |
| 5    | Temporary ANPR Systems          | Nos  | 444  | 9 Months |      |        |
| 6    | Mobile Surveillance Units       | Nos  | 50   | 9 Months |      |        |
| 7    | Drone Surveillance Systems      | Nos  | 20   | 9 Months |      |        |
| 8    | Underwater Surveillance Systems | Nos  | 30   | 9 Months |      |        |
| 9    | Body-Worn Cameras               | Nos  | 2000 | 9 Months |      |        |
| 10   | Dash Cameras                    | Nos  | 400  | 9 Months |      |        |

### 4.2 Temporary Communication & Network Infrastructure

| S.No | Item Description                                      | Unit | Qty | Duration | Rate | Amount |
|------|-------------------------------------------------------|------|-----|----------|------|--------|
| 1    | Temporary OFC/RF/Wireless Connectivity Infrastructure | Lot  | 1   | 9 Months |      |        |
| 2    | Temporary Field Network Infrastructure                | Lot  | 1   | 9 Months |      |        |
| 3    | Temporary Power Connectivity Infrastructure           | Lot  | 1   | 9 Months |      |        |
| 4    | Temporary Wi-Fi / RF Systems                          | Lot  | 1   | 9 Months |      |        |

### 4.3 Enterprise Radio / Wireless Communication System

| S.No | Item Description                                                                                                                                          | Unit | Qty | Duration | Rate | Amount |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----|----------|------|--------|
| 1    | Digital Handheld Wireless Communication System including handheld devices, repeaters, dispatch console, charging units, batteries, software & accessories | Lot  | 1   | 9 Months |      |        |

### 4.4 Temporary Field Infrastructure

| S.No | Item Description                          | Unit | Qty | Duration | Rate | Amount |
|------|-------------------------------------------|------|-----|----------|------|--------|
| 1    | Temporary Poles & Mounting Infrastructure | Nos  | 650 | 9 Months |      |        |
| 2    | Temporary Outdoor Cabinets                | Nos  | 526 | 9 Months |      |        |

|   |                                                |     |   |          |  |  |
|---|------------------------------------------------|-----|---|----------|--|--|
| 3 | DG/UPS Support Infrastructure                  | Lot | 1 | 9 Months |  |  |
| 4 | Temporary Power Infrastructure                 | Lot | 1 | 9 Months |  |  |
| 5 | Temporary Public Address System Infrastructure | Lot | 1 | 9 Months |  |  |
| 6 | Emergency Call Box (ECB) Infrastructure        | Lot | 1 | 9 Months |  |  |

## SECTION 5: O&M PRICE SCHEDULE

### 5.1 O&M for Permanent Infrastructure (60 Months)

| SNo | Component                         | Year-1 | Year-2 | Year-3 | Year-4 | Year-5 | Total |
|-----|-----------------------------------|--------|--------|--------|--------|--------|-------|
| 1   | Surveillance Systems              |        |        |        |        |        |       |
| 2   | Enterprise Software Platforms     |        |        |        |        |        |       |
| 3   | Communication Network             |        |        |        |        |        |       |
| 4   | Data Center / DR Infrastructure   |        |        |        |        |        |       |
| 5   | Cybersecurity Systems             |        |        |        |        |        |       |
| 6   | ICCC / Viewing Centers / War Room |        |        |        |        |        |       |
| 7   | Field Infrastructure              |        |        |        |        |        |       |
| 8   | Helpdesk & Support Services       |        |        |        |        |        |       |
| 9   | Manpower Deployment               |        |        |        |        |        |       |
| 10  | Spare & Consumable Management     |        |        |        |        |        |       |

### 5.2 Temporary Infrastructure (9 Months)

| SNo | Component                                     | Monthly Cost | Duration | Amount |
|-----|-----------------------------------------------|--------------|----------|--------|
| 1   | Temporary Surveillance Operations             |              |          |        |
| 2   | Temporary Communication Operations            |              |          |        |
| 3   | Temporary ICCC Support Operations             |              |          |        |
| 4   | Temporary Field Infrastructure Operations     |              |          |        |
| 5   | Temporary Manpower & Event Operations Support |              |          |        |

**SECTION 6: OPTIONAL / FUTURE EXPANSION ITEMS**

(Items not considered for evaluation)

| SNo | Item Description                       | Unit | Qty  | Rate | Amount |
|-----|----------------------------------------|------|------|------|--------|
| 1   | Additional Fixed Cameras               | Nos  | 60   |      |        |
| 2   | Additional PTZ Cameras                 | Nos  | 20   |      |        |
| 3   | Additional Thermal Cameras             | Nos  | 10   |      |        |
| 4   | Additional Analytics Modules           | Lot  | 1    |      |        |
| 5   | LiDAR-Based Analytics                  | Lot  | 1    |      |        |
| 6   | Additional Viewing Centers             | Nos  | 1    |      |        |
| 7   | Additional Storage Capacity            | TB   | 1000 |      |        |
| 8   | Additional AI GPU Capacity             | Lot  | 1    |      |        |
| 9   | Additional Wireless Communication Sets | Nos  | 100  |      |        |

**SECTION 7: RATE DISCOVERY / CHANGE REQUEST ITEMS**

| SNo | Item Description                      | Unit       | Rate (INR) |
|-----|---------------------------------------|------------|------------|
| 1   | Additional Fixed Camera Deployment    | Per Unit   |            |
| 2   | Additional PTZ Camera Deployment      | Per Unit   |            |
| 3   | Additional Thermal Camera Deployment  | Per Unit   |            |
| 4   | Additional ANPR Deployment            | Per Unit   |            |
| 5   | Additional Pole Installation          | Per Unit   |            |
| 6   | Additional OFC Deployment             | Per Km     |            |
| 7   | Additional Operator Workstation       | Per Unit   |            |
| 8   | Additional Viewing Center             | Per Unit   |            |
| 9   | Additional Analytics License          | Per Module |            |
| 10  | Additional Storage Capacity           | Per TB     |            |
| 11  | Additional Wireless Communication Set | Per Unit   |            |
| 12  | Additional Temporary Deployment       | Per Month  |            |

#### **ANNEXURE 1: FINANCIAL BID UNDERTAKING**

We hereby certify that:

- all quoted prices are complete and inclusive;
- no hidden costs exist;
- quoted prices are sufficient for successful execution of the Project;
- and we accept all payment terms specified in the RFP.

#### **ANNEXURE 2: BREAK-UP OF TAXES & DUTIES**

| SNo | Tax / Duty            | Applicable Rate | Amount |
|-----|-----------------------|-----------------|--------|
| 1   | GST                   |                 |        |
| 2   | Other Taxes/<br>Duies |                 |        |

#### **ANNEXURE 3: COMMERCIAL DEVIATION STATEMENT**

| SNo | Clause Reference | Proposed Deviation | Justification |
|-----|------------------|--------------------|---------------|
| 1   |                  |                    |               |
| 2   |                  |                    |               |
| 3   |                  |                    |               |

**If no deviations:**

**“We confirm that no commercial deviations are proposed.”**

#### **ANNEXURE 4: PRICE REASONABILITY CERTIFICATE**

We hereby certify that:

- the quoted prices are reasonable;
- prices are not abnormally low or inflated;
- rates are consistent with prevailing market conditions;
- and quoted prices are adequate for successful implementation, operations, maintenance, and SLA compliance of the Project.

Authorized Signatory

Name:

Designation:

Bidder Name:

Signature:

Seal: